

Features

- Frequency: 1.2GHz~1.4GHz
- Gain: 21dB
- Noise Figure: 0.7dB
- Supply Voltage: +5V@100mA
- Die Size: 0.72mm×1.24mm×0.1 mm

Typical Applications


- Radar and ECM
- RF/ Microwave radio
- Military and Space
- Test and Measurement
- Fiber Optics

General Description

SAC3022 is a GaAs MMIC low noise amplifier die which operates between 1.2GHz~1.4GHz. The amplifier can provide 21dB gain, 22dBm Output P_{1dB} and 0.7dB noise figure from a 100mA supply current.

The chip offers full passivation for increased reliability and moisture protection. This amplifier is the perfect alternative to higher cost hybrid amplifiers.

Functional Diagram

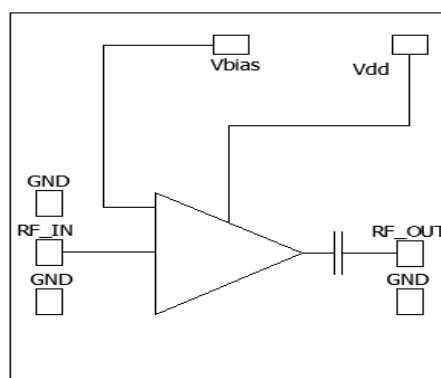


Electrical Performance (T_A=25°C, V_D= +5V, I_D=100mA, Z₀=50Ω)

Parameter	Min.	Typ.	Max.	Units
Frequency Range	1.2~1.4			GHz
Gain	—	21	—	dB
Gain Flatness	—	0.5	—	dB
Reverse Isolation	—	-28	—	dB
Input/Output VSWR	—	1.5	—	:1
Noise Figure	—	0.7	—	dB
Output Power for 1 dB Compression (OP _{1dB})	—	22	—	dBm
Output Third Order Intercept (OIP ₃)	—	32.5	—	dBm
Supply Current(I _D)	—	100	—	mA

Absolute Maximum Ratings

Maximum Input Power	+18dBm	Operating Temperature	-55°C~+85°C
Channel temperature	+150°C	Storage Temperature	-65°C~+150°C

Typical Performance Curve

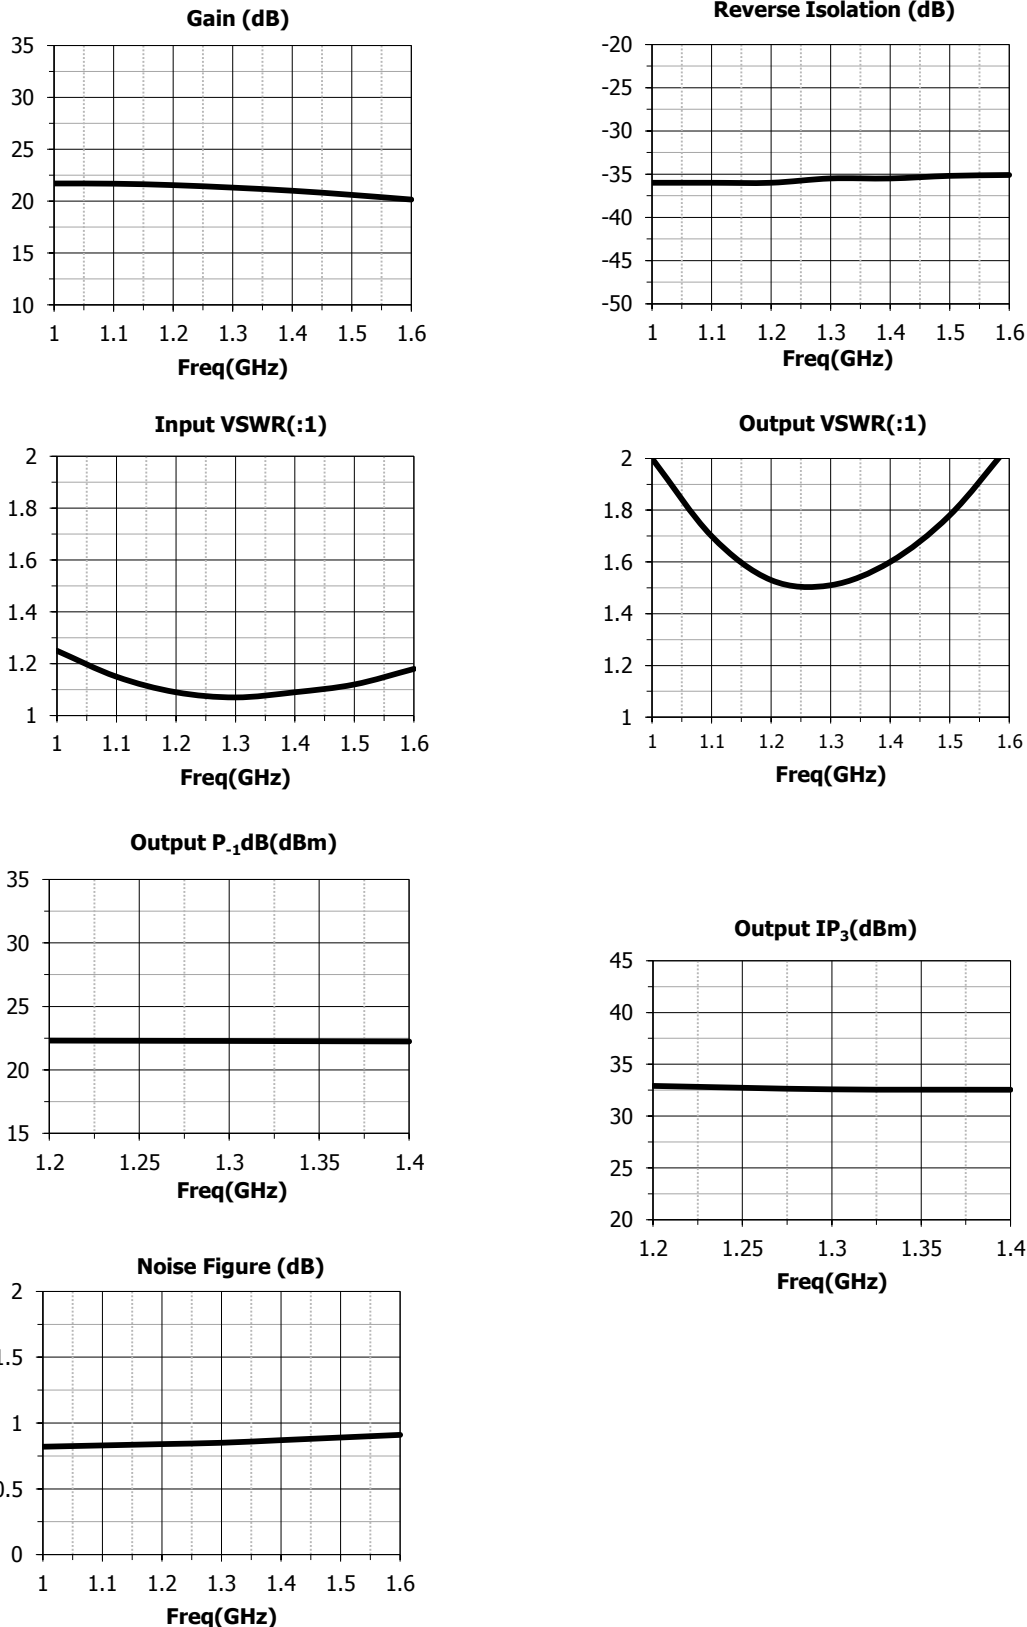


SAC3022


GaAs MMIC Low Noise Amplifier
1.2GHz~1.4GHz

Rev 2.1

Die Outline
(All dimensions in mm)

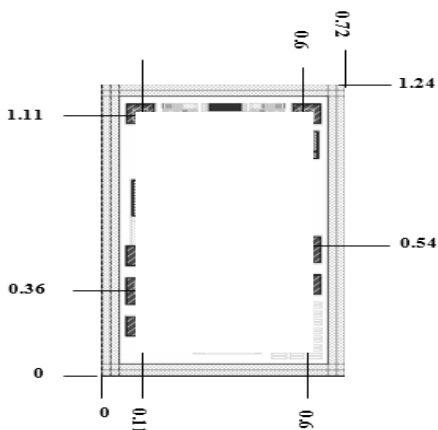

Assembly Diagram

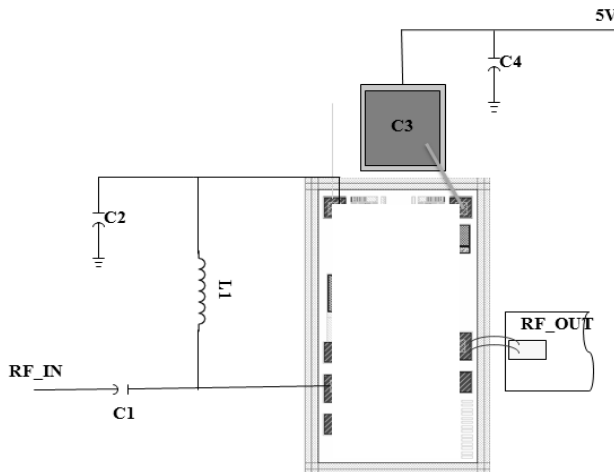

Components List

Reference Des.	Value	Part Number	Manuf.	Size
C1	22pF	GRM1555C1H220JA01D	MURATA	0402
C2	33pF	GRM1555C1H330JA01D	MURATA	0402
C3	100pF	—	RADVISTA	Chip
C4	10nF	GRM1857U1A103JA44	MURATA	0402
L1	27nH	0402CS-27NXGE	COILCRAFT	0402

Attention:

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.