

Features

- Frequency: 33.5GHz~36.5GHz
- Gain: 25dB
- Output P_{1dB}: 35dBm
- Supply Voltage: +6V
- Power-Added Efficiency: 20%
- Die Size: 3.55mm×3.85mm×0.1mm
- Packaged: Bare Die

Typical Applications


- Microwave radio including point to point communication
- Telecommunication
- Weather radar
- Optical communication
- Test instrumentation
- SatCom
- VSAT
- Military and Aerospace

General Description

SAC3124 is a Ka-band GaAs MMIC power amplifier. SAC3124 provides 25 dB of gain, and 35dBm of output power for 1 dB compression and 20%PAE from a +6V supply.

The chip has surface passivation for protection and backside via holes and gold metallization to allow a conductive epoxy die attach process. This device is well suited for communications, Point to Point radio and radar applications.

Functional Diagram



Electrical Performance

T_A=25°C, V_D=+6V, I_D=2.5A, Z₀=50Ω, CW

Parameter	Min.	Typ.	Max.	Units
Frequency Range	33.5~36.5			GHz
Small Signal Gain	21	25	—	dB
Small Signal Gain Flatness	—	±1.5	—	dB
Reverse Isolation	—	-50	—	dB
Input Return Loss	—	-10	—	dB
Power-Added Efficiency	—	20	—	%
Output Power for 1 dB Compression (OP _{1dB})	34	35	—	dBm
Drain Voltage (V _D)	—	6	6.3	V
Gate Current (I _G)	—	4	25	mA
Supply Current (I _D)	—	3.0	3.5	A
Thermal Resistance	—	4.15	—	°C/W


Absolute Maximum Ratings

Maximum Input Power	+15dBm	Operating Temperature	-40°C~+70°C
Channel Temperature	+150°C	Storage Temperature	-65°C~+150°C
Maximum V _D	+6.5V	Maximum V _G	-1.2V

Typical Small Signal Performance Curve

On Carrier measurements with 50 Ohms probes.
The results captured in the test-jig environment within connector plan.


$V_D = +6V$ $I_D = 2.5A$ CW

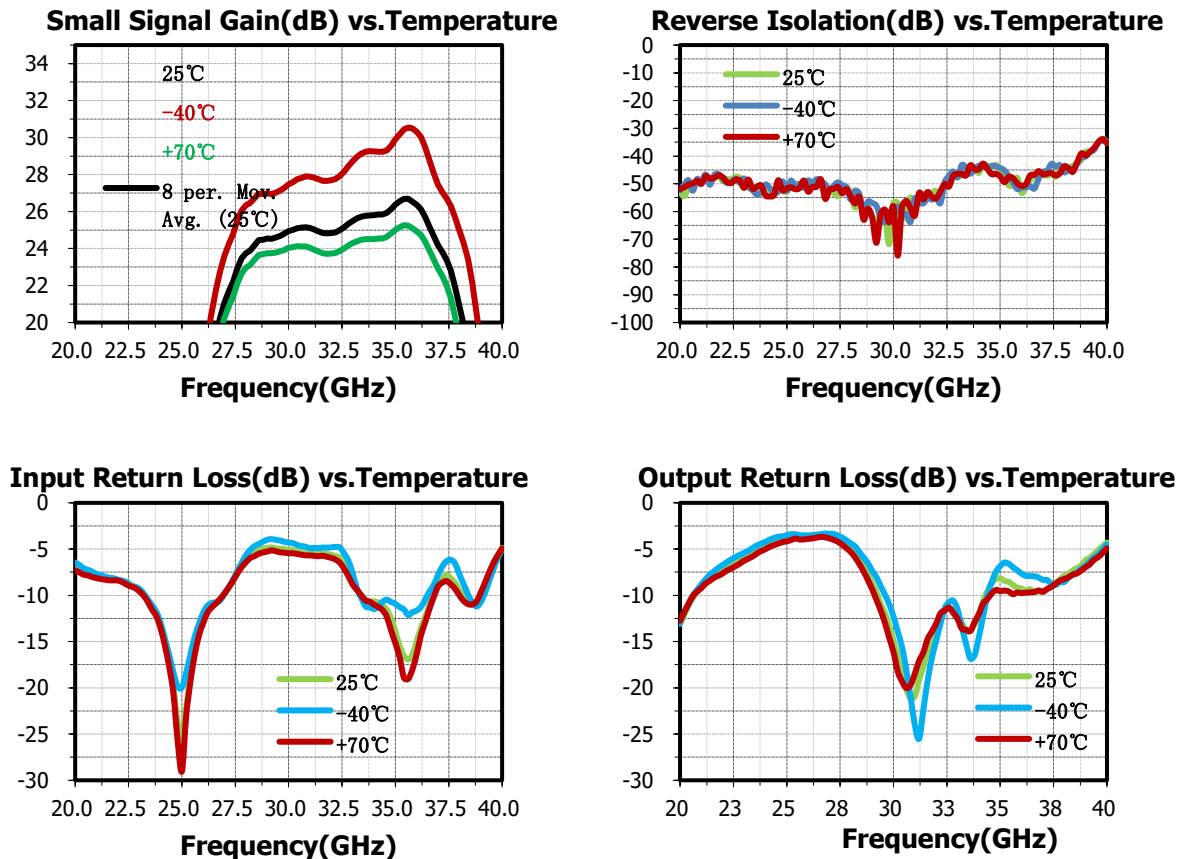

Power and PAE Performance Curve

The results captured in the test-jig environment within connector plan, then de-embedded the housing and come back in the die plan


$V_D = +6V$ $I_D = 2.5A$ CW

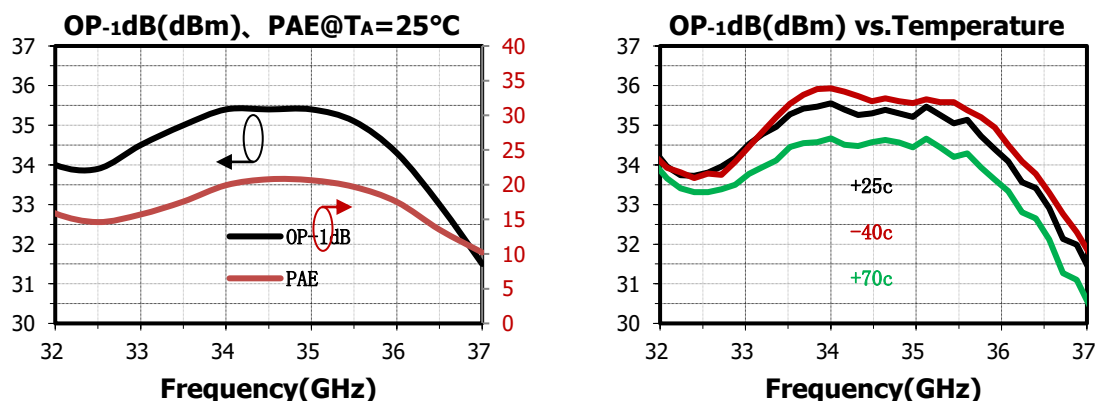

SAC3124


GaAs MMIC Power Amplifier
33.5GHz~36.5GHz 35dBm

Rev2.1

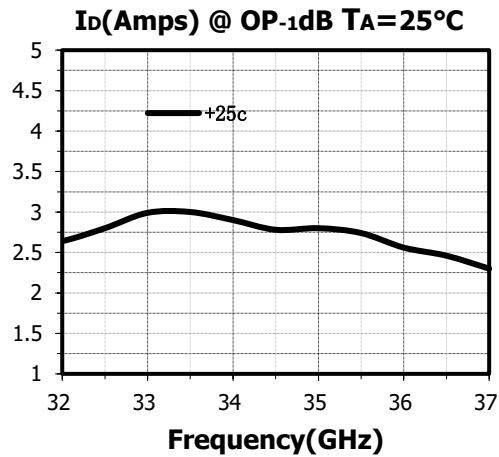

Die Outline

All dimensions in μm

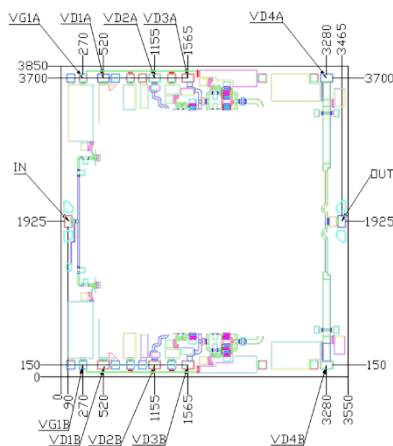


Bonding pad size:

150x100 μm VD1A ~ VD4A, VD1B ~ VD4B, RF IN, RFOUT pads

100x100 μm VG1A, VG1B pads

Assembly Diagram

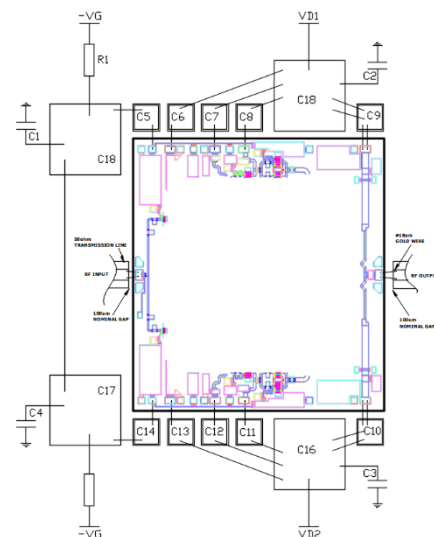

Components List

Reference Des.	Value	Part Number	Manuf.	Size
C1~4	2.2 μF	GRM155R61A225KE15D	Murata	0402
C5~C14	300pF	—	ANY	SLC
C15~C18	1000pF	—	ANY	SLC
R1*	2.2 Ω	—	ANY	0603

* The value of R1 varies with the internal resistance of the gate bias circuit. When the internal resistance value of the gate bias circuit is less than 2 Ω , R1=1 to 6.2 ohm is suitable.

SAC3124



GaAs MMIC Power Amplifier
33.5GHz~36.5GHz 35dBm

Rev2.1

Notes

1. SAC3124 is biased with a positive drain supply and negative gate supply. The recommended gate voltage is set to -0.7~-0.8V.
2. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 0.8 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized. The RF input and output require a double bond wire as shown.
3. The backside of SAC3124 is RF ground. Eutectic mounting is preferred, if using conductive epoxy, recommended epoxies is UNIMEC H9890-6A cured per the manufacturer's cure schedule. Epoxy should be applied in accordance with the manufacturers specifications and should avoid contact with the top surface of the die. An epoxy fillet should be visible around the total die periphery.
4. Bypass caps C1~C4 should be placed no farther than 1.5mm from the amplifier.

Revision History

Revision	Date	Comment
1.0	Mar 10, 2018	First Release
2.1	Jan 31, 2024	Revise Die Outline and Assembly Diagram

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com