

# SAC3118Q6

GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm

Rev 2.2

## Features

- Frequency: 27GHz~30GHz
- Gain: 26dB
- Output P<sub>-1dB</sub>: 35.5dBm
- Supply Voltage: +6V
- Power-Added Efficiency: 20%
- Package Size: 6mm×6mm×1.2mm

## Typical Applications


- Microwave radio
- Telecommunication
- Test instrumentation
- SATCOM
- VSAT

## General Description

SAC3118Q6 is a KA band GaAs MMIC power amplifier. SAC3118Q6 provides 26dB of gain, and 35.5dBm of output power for 1 dB compression and 20% PAE from a +6V supply.

SAC3118Q6 is a GaAs MMIC power amplifier housed in a 6x6 mm surface mount package. SAC3118Q6 is ideal for SATCOM, test equipment applications, Point to Point radio and radar applications.

## Image

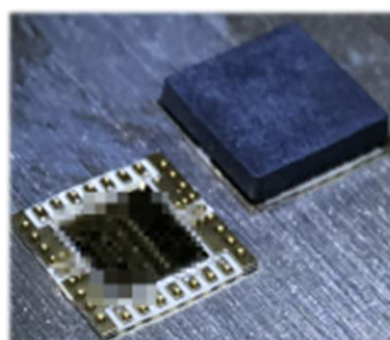

## Electrical Performance

**T<sub>A</sub>=25°C, V<sub>D</sub>=+6V, I<sub>DQ</sub>=2A, Z<sub>0</sub>=50Ω, CW Fixture Test**

Parameter	Min.	Typ.	Max.	Units
Frequency Range	27~30			GHz
Small Signal Gain	23	26	—	dB
Small Signal Gain Flatness	—	±2	—	dB
Reverse Isolation	—	-40	—	dB
Input Return Loss	—	-10	—	dB
Power-Added Efficiency	—	20	—	%
Output Power for 1 dB Compression (OP <sub>-1dB</sub> )	35	35.5	—	dBm
Output Third Order Intercept (OIP <sub>3</sub> ) *	—	39	—	dBm
IM <sub>3</sub> ***	—	-24	—	dBc
Drain Voltage (V <sub>D</sub> )	—	6	6.3	V
Gate Current (I <sub>G</sub> )	—	5	28	mA
Supply Current (I <sub>b</sub> )	—	3.5	4.2	A
Thermal Resistance **	—	4.1	—	°C/W

\*Pout / Tone = 22dBm, fc= 29GHz, Δf=1MHz

\*\*The device is soldered on Ro4350b t=0.168mm, with 81 filled metal vias for grounding.

\*\*\* Pout / Tone = 27dBm, fc= 29GHz, Δf=1MHz

## SuperApex, LLC

1580 S. Milwaukee Ave., Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3118Q6



GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm

Rev 2.2

## Absolute Maximum Ratings


Maximum Input Power	+14dBm	Operating Temperature	-40°C~+70°C
Channel Temperature	165°C	Storage Temperature	-65°C~+150°C
Maximum $V_D$	+6.5V	Maximum $V_G$	-1.2V

## Typical Performance Curve


The results captured in the test-jig environment within connector plane

$V_D=+6v$   $I_D=2A$  CW


Small Signal Gain(dB) vs.Temperature

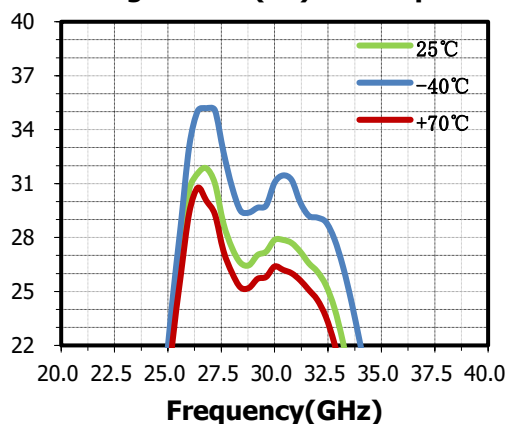


Reverse Isolation(dB) vs.Temperature

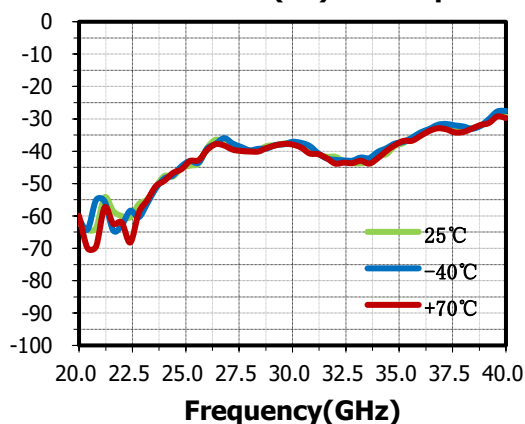

Input Return Loss(dB) vs.Temperature

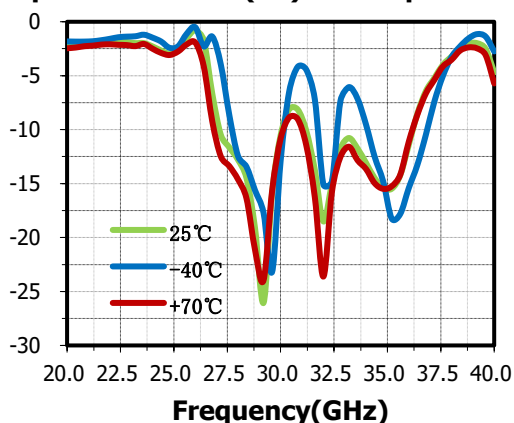

Output Return Loss(dB) vs.Temperature

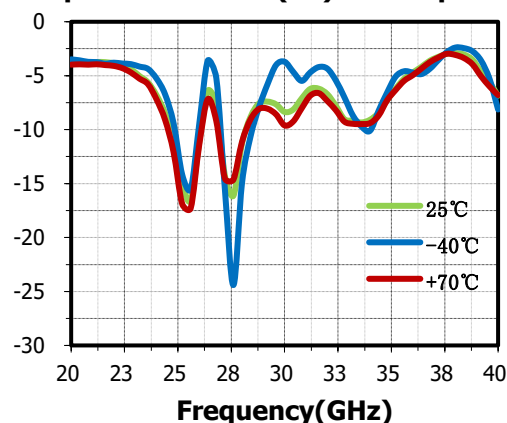

### SuperApex, LLC

1580 S. Milwaukee Ave., Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3118Q6






GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm

Rev 2.2

## Power and PAE Performance Curve

The results captured in the test-jig environment within connector plane, then de-embedded the housing and come back in the die plane

**$V_D = +6v$   $I_D = 2A$  CW**

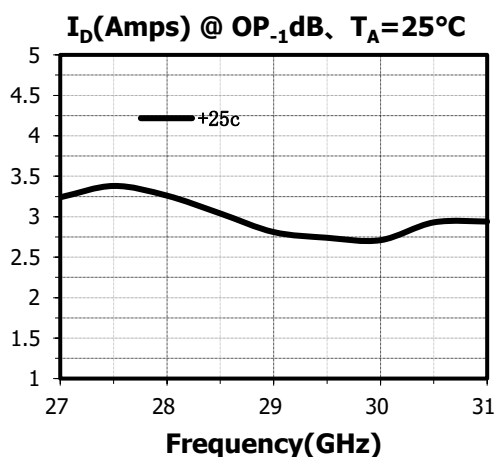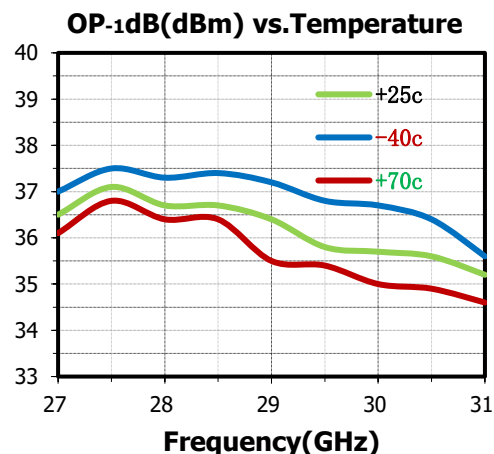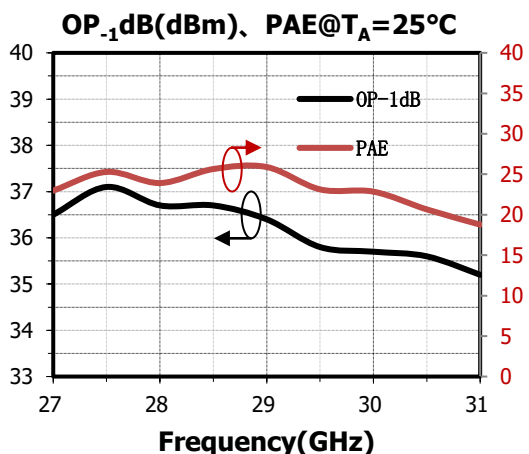





# SAC3118Q6

GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm

Rev 2.2

## OIP<sub>3</sub> , IM<sub>3</sub> Performance Curve

The results captured in the test-jig environment within connector plane, then de-embedded the housing and come back in the die plane

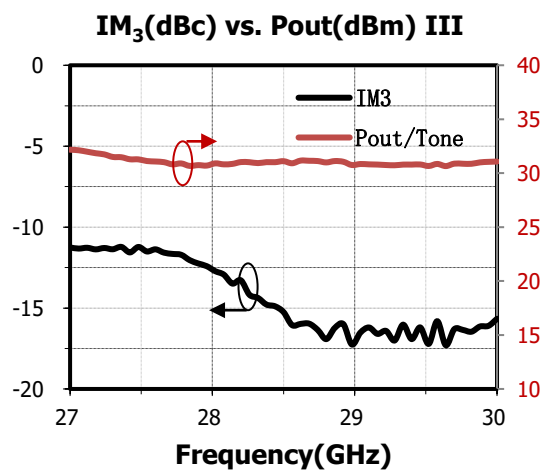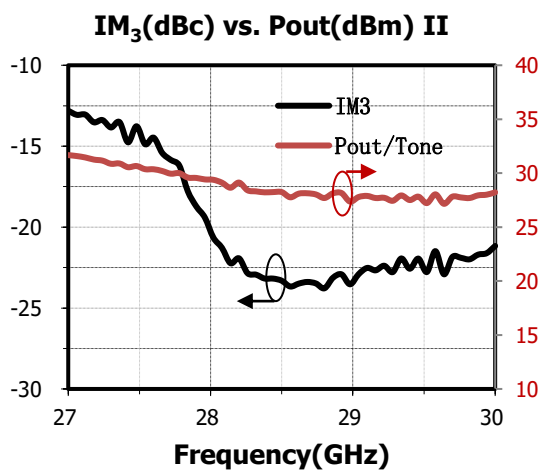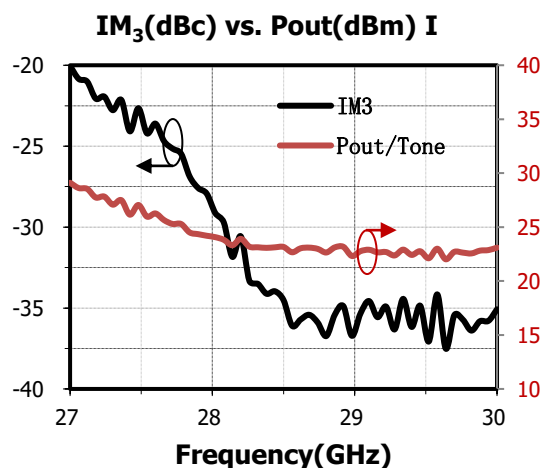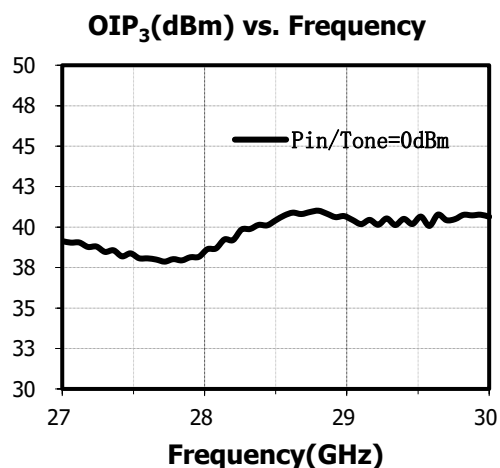


# SAC3118Q6

GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm

Rev 2.2


## Outline Drawing(mm)

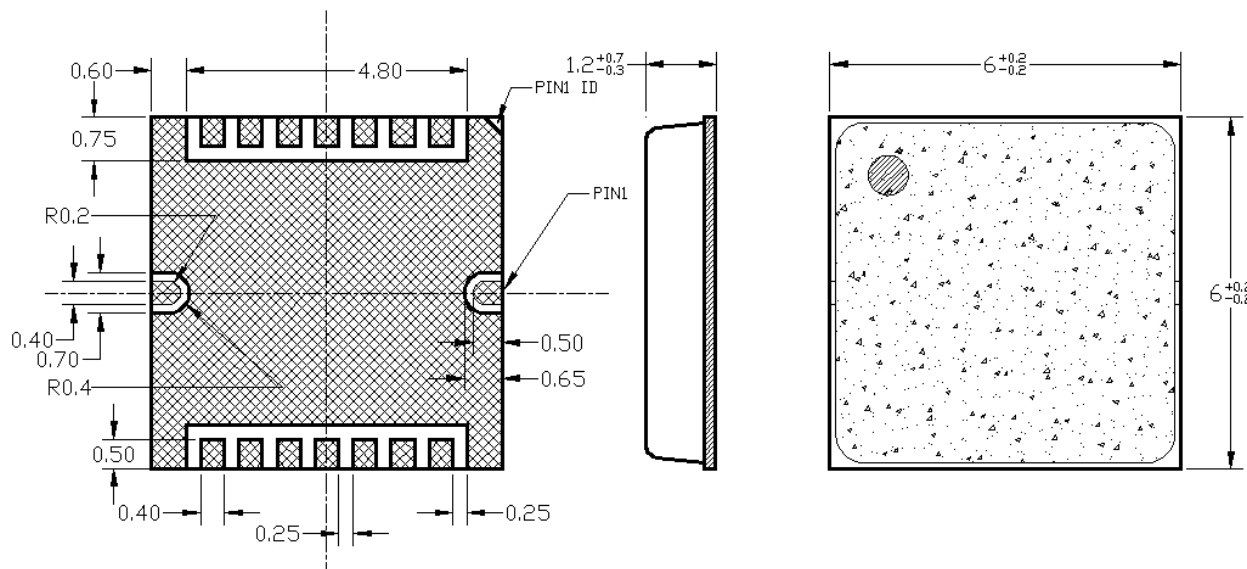

## Pin Descriptions

Pin No.	Function	Pin No.	Function
1	RF Input, Internal grounding	9	RF Output, AC coupled
2	Gate1 A	10	Drain 4B
3	Drain A	11	NC
4	Drain 2 A	12	Drain 3B
5	NC	13	NC
6	Drain 3 A	14	Drain 2B
7	NC	15	Drain 1B
8	Drain 4A	16	Gate 1 B

## Application Circuit

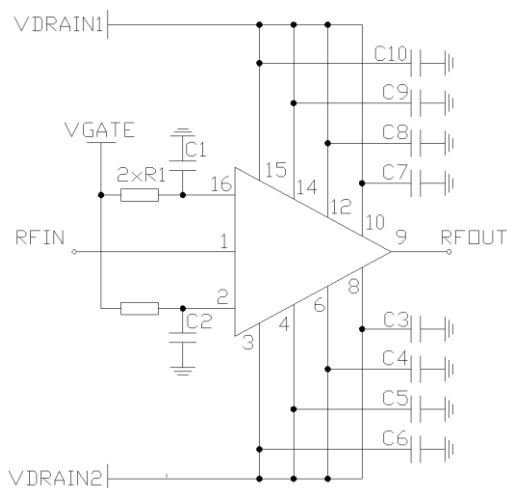

## SuperApex, LLC

1580 S. Milwaukee Ave., Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3118Q6

GaAs MMIC Power Amplifier  
27GHz~30GHz 35.5dBm


Rev 2.2

## List of Material

Reference Des.	Value	Part Number	Manuf.	Size
C1~C2	2.2uF	GRM033R61A225KE47D	Murata	0201
C3~C10	0.047uF	GRM033R61A473KE47D	Murata	0201
R1*	20Ω	—	ANY	0603

\*The value of R1 is related the internal resistance of gate bias circuit, when the internal resistance of the gate bias circuit is less than 2 Ohms, set the R1 to 15~30 Ohms.

## SAC3118Q6 test fixture

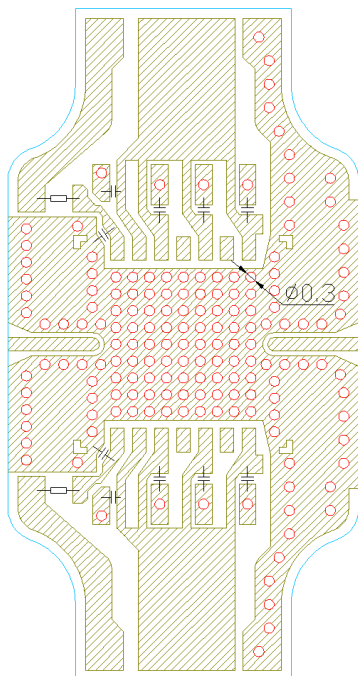


- PCB substrate: RO4350B, Thickness of substrate: 0.254mm
- electronic copy of board design documents is available for reference.

### Attention:


- The moisture resistant grade of products is 2A, the storage environment  $\leq 30^{\circ}\text{C}/60\% \text{RH}$ , the surrounding workshop Life is 4 weeks.
- After un-packing, it is necessary to bake the parts for 6 hours in  $125\pm 5$ -degree environment before soldering.

## Recommended use of this chip with special attention


- It is highly recommended to reserve a micro-strip line at the output of device, it will be used for fine tune of output power. etc.

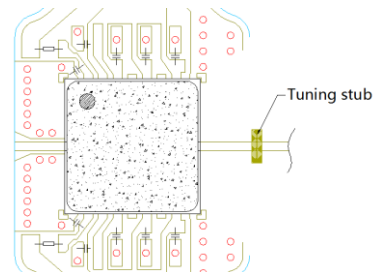

- If there is resonance, try to put some absorbing material at the top of the device.



- Put all de-coupling capacitors as closer as possible to the device.
- In order to prevent the device being destroyed by bad heat dissipation, make sure most of the ground via be filled with solder paste once device soldering work has been done.



- Use thin PCB board to short the thermal dissipation path.

## SuperApex, LLC

1580 S. Milwaukee Ave., Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com