

SAC3311A



GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
1.2~1.8GHz

Rev 1.0

Features

- Frequency: 1.2~1.8GHz
- RMS of Phase Accuracy: 1°
- Low Insertion Loss: 4.7dB
- Positive Voltage Control
- Die Size: 3.74mm×1.25mm×0.1mm

Typical Applications


- EW
- Military Radar and Weather Radar
- SATCOM
- Beamforming Modules
- Phase Cancellation

General Description

SAC3311A is a 6-bit digital phase shifter which works from 1.2 to 1.8GHz, providing 360 degrees of phase coverage with a LSB of 5.625 degrees.

SAC3311A features very low RMS phase error of 1 degrees and extremely low insertion loss variation of ±0.3dB across all phase states. This high accuracy phase shifter is controlled with positive control voltage of 0/+5V.

Functional Diagram

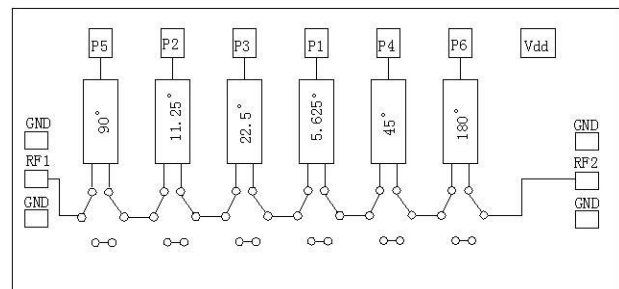

Electrical Performance

$T_A = +25^\circ\text{C}$, $V_{DD} = -5\text{V}$, Control Voltage = 0/+5V, $Z_0 = 50\Omega$

Parameter	Min.	Typ.	Max.	Units
Frequency	1.2~1.8			GHz
Input VSWR	—	1.4	—	:1
Output VSWR	—	1.4	—	:1
Insertion Loss	—	-4.7	—	dB
IL Variation	—	±0.3	—	dB
Phase Accuracy	—	±2	—	°
RMS of Phase Accuracy	—	1	—	°

Truth Table (0: 0V, 1: +5V)

Phase	P1	P2	P3	P4	P5	P6
REF	0	0	0	0	0	0
-5.625°	1	0	0	0	0	0
-11.25°	0	1	0	0	0	0
-22.5°	0	0	1	0	0	0
-45°	0	0	0	1	0	0
-90°	0	0	0	0	1	0
-180°	0	0	0	0	0	1
-354.375°	1	1	1	1	1	1

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3311A



GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
1.2~1.8GHz

Rev 1.0

Absolute Maximum Ratings

Maximum Input Power	+23dBm	Operating Temperature	-55°C~+85°C
Maximum Input Voltage	-5.5V	Storage Temperature	-65°C~+150°C





Control Voltage

State	Bias
Low	0~0.2V
High	3.0~5.5V

Power Supply

V _D	I _D
-5V	8mA

Typical Performance Curve

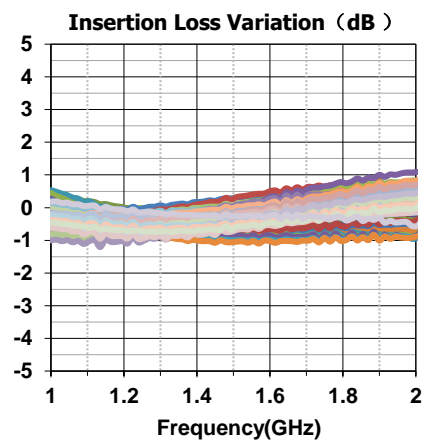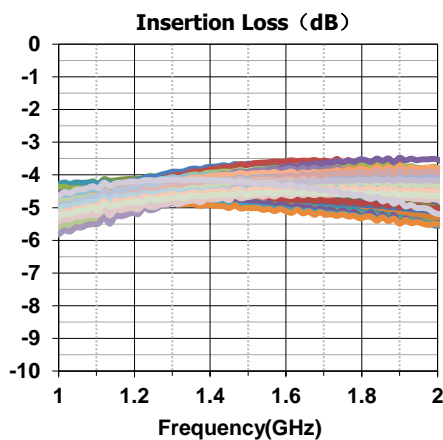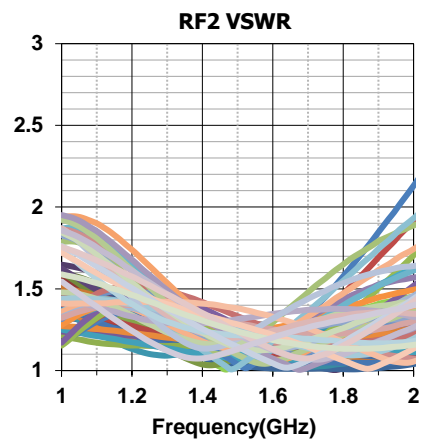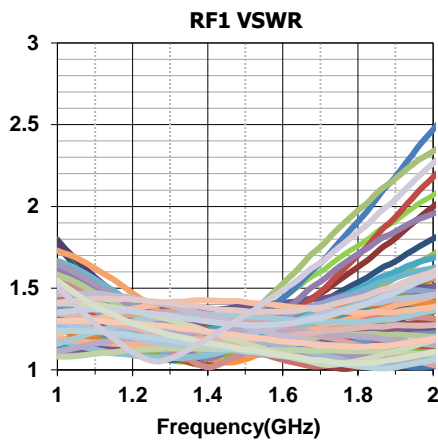



SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3311A


GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
1.2~1.8GHz

Rev 1.0

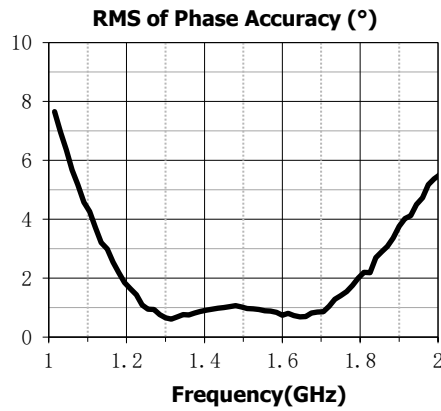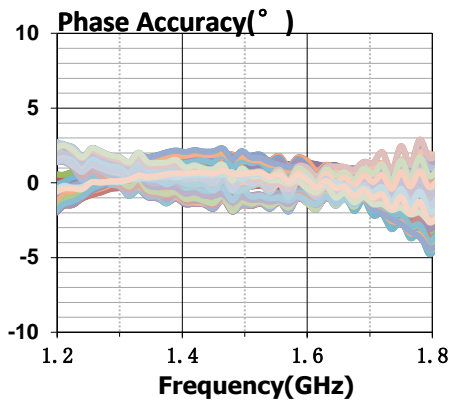


Die Outline

All dimensions in um

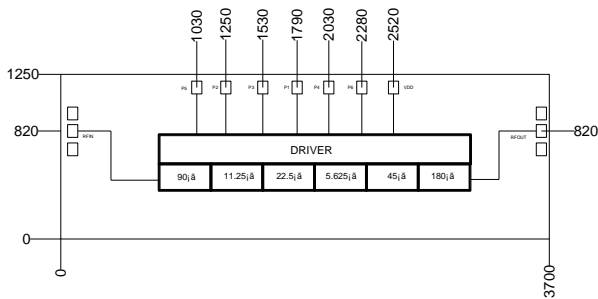

Assembly Diagram

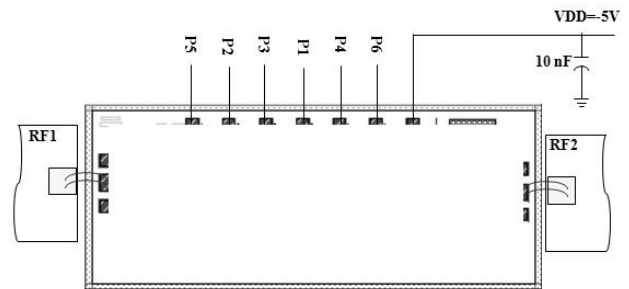

Attention:

GaAs MMIC devices are susceptible to damage from electrostatic discharge. Proper precautions should be observed during handling, assembly and test.