

SAC3306A



GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
5~6GHz

Rev 2.2

Features

- Frequency: 5~6GHz
- RMS of Phase Accuracy: 2°
- Low Insertion Loss: 5.5dB
- Positive Voltage Control
- Die Size: 3.1mm×1.25mm×0.1mm

Typical Applications


- EW
- Military Radar and Weather Radar
- SATCOM
- Beamforming Modules
- Phase Cancellation

General Description

SAC3306A is a 6-bit digital phase shifter which works from 5 to 6GHz, providing 360 degrees of phase coverage with a LSB of 5.625 degrees.

SAC3306A features very low RMS phase error of 2 degrees and extremely low insertion loss variation of ±0.5dB across all phase states. This high accuracy phase shifter is controlled with positive control voltage of 0/+5V.

Functional Diagram

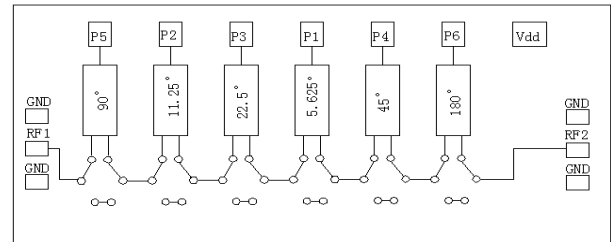

Electrical Performance (T_A=+25°C, V_D=-5V, Control Voltage=0/+5V, Z₀=50Ω)

Parameter	Min.	Typ.	Max.	Units
Frequency		5~6		GHz
Input VSWR	—	1.4	—	:1
Output VSWR	—	1.4	—	:1
Insertion Loss	—	-5.5	—	dB
IL Variation	-0.7	—	0.7	dB
Phase Accuracy	-6	—	3	°
RMS of Phase Accuracy	—	2.0	—	°

Truth Table (0: 0V, 1: +5V)

Phase	P1	P2	P3	P4	P5	P6
REF	0	0	0	0	1	0
-5.625°	1	0	0	0	1	0
-11.25°	0	1	0	0	1	0
-22.5°	0	0	1	0	1	0
-45°	0	0	0	1	1	0
-90°	0	0	0	0	0	0
-180°	0	0	0	0	1	1
-354.375°	1	1	1	1	0	1

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3306A



GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
5~6GHz

Rev 2.2

Absolute Maximum Ratings

Maximum Input Power	+23dBm	Operating Temperature	-55°C~+85°C
Maximum Input Voltage	-8V	Storage Temperature	-65°C~+150°C







Control Voltage

State	Bias
Low	0~0.2V
High	3.3~5.5V

Power Supply

V _D	I _D
-5V	8mA

Typical Performance Curve

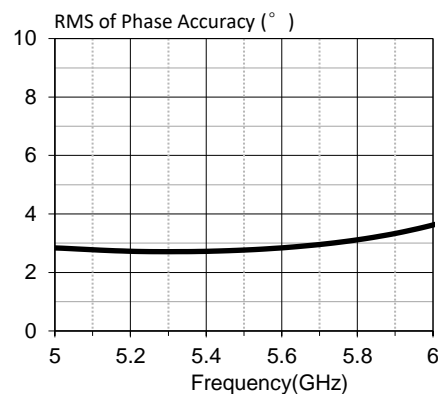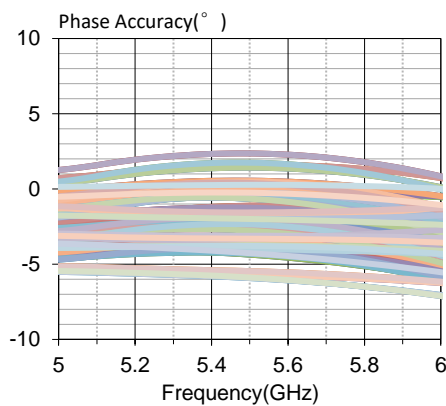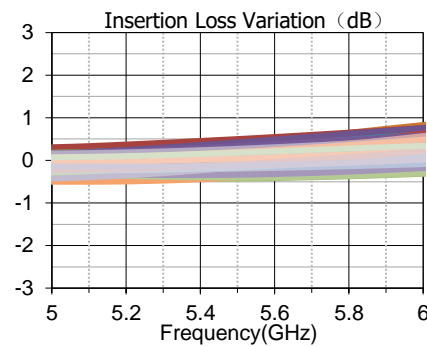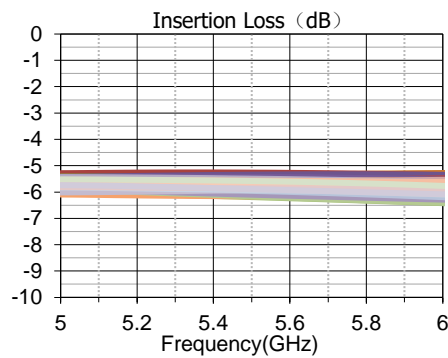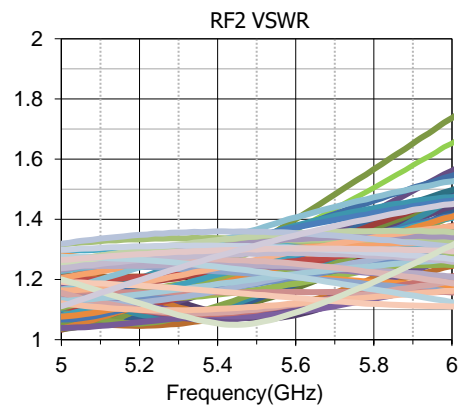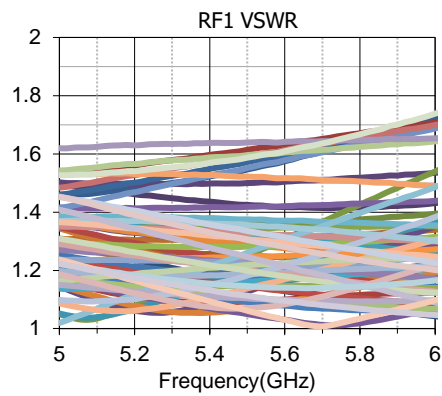

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3306A




GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
5~6GHz

Rev 2.2

Die Outline
(All dimensions in mm)

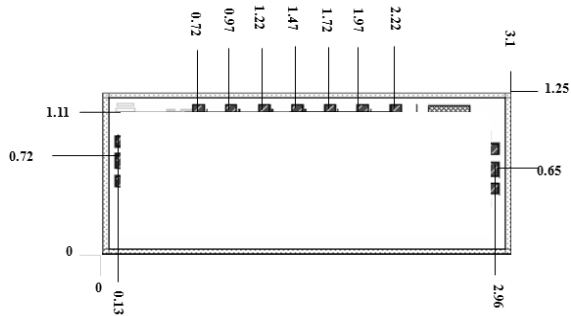

Assembly Diagram

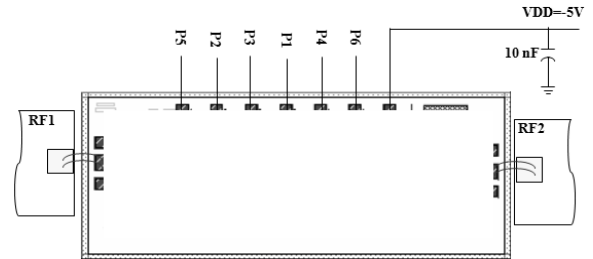

Attention:

GaAs MMIC devices are susceptible to damage from electrostatic discharge. Proper precautions should be observed during handling, assembly and test.

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com