

SAC3941A

GaAs MMIC Power Amplifier
18GHz~41GHz 21dBm

Rev 1.0

Features

- Frequency: 18GHz~41GHz
- Small Signal Gain: 19dB
- Output P_{-1dB}: 21dBm
- Supply Voltage: +5V/-0.7Vg
- Die Size: 1.84mm×0.85mm×0.1mm
- Packaged: Bare Die

Typical Applications


- Microwave radio
- Telecommunication
- Test instrumentation
- SatCom
- VSAT

General Description

SAC3941A is a wideband GaAs MMIC power amplifier. SAC3941A provides 19 dB of gain, and 21dBm of OutputP_{-1dB} power from a +5V supply voltage.

The chip has surface passivation for protection and backside via holes and gold metallization to allow a conductive epoxy die attach process.

Functional Diagram

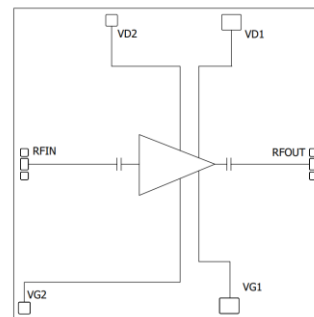

Electrical Performance

T_A=25°C, V_D=+5V, I_{DQ}=180mA, Z₀=50Ω

Parameter	Min.	Typ.	Max.	Units
Frequency Range	18	—	41	GHz
Small Signal Gain	17	19	23	dB
Small Signal Gain Flatness	—	±3	—	dB
Reverse Isolation	—	-55	-40	dB
Input VSWR	—	1.5	2.2	dB
Output VSWR	—	1.5	4.5	dB
Output Power for 1 dB Compression (OP _{-1dB})	19	22	—	dBm
Drain Voltage (V _D)	4.5	—	6.5	V
Gate Current (V _G)	—	-0.7	—	V
Supply Current (I _D)	—	180	250	mA

Absolute Maximum Ratings

Maximum Input Power	+20dBm	Operating Temperature (Chip back temperature)	-55°C~+85°C
Channel Temperature	165°C	Storage Temperature	-55°C~+150°C
Maximum V _D	+7V	V _G Voltage Range	-1.5V~-0.55V

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3941A









GaAs MMIC Power Amplifier
18GHz~41GHz 21dBm

Rev 1.0

Typical Performance Curve

VD=+5V, IDQ=-0.7V, IDQ=180mA, TA=+25°C The following curves are taken from SAC3941A bare die.

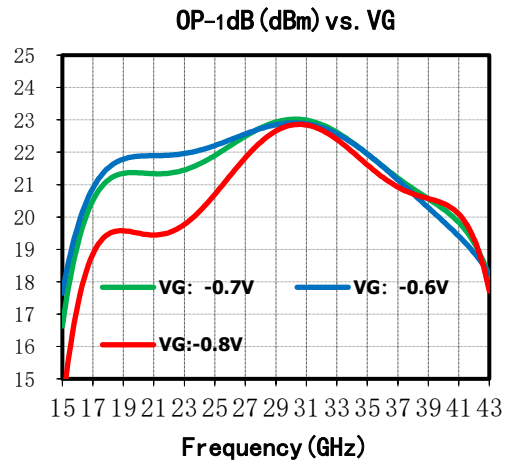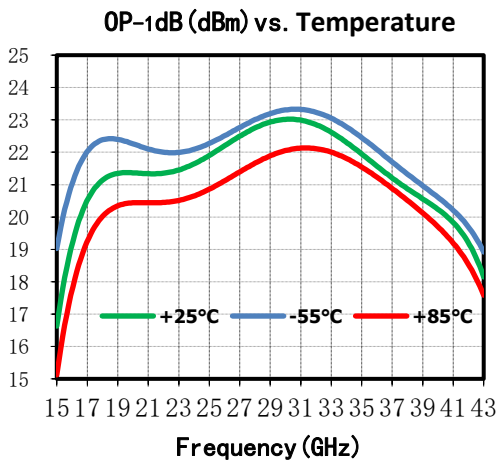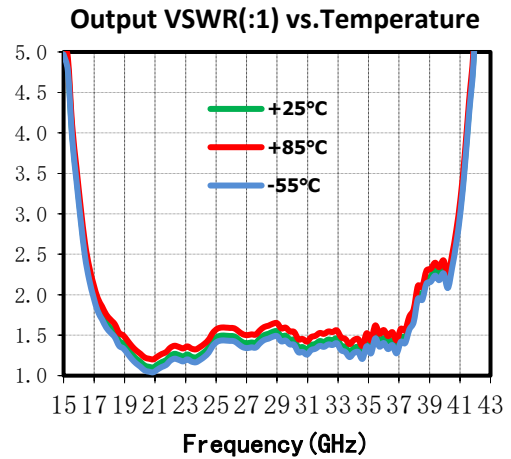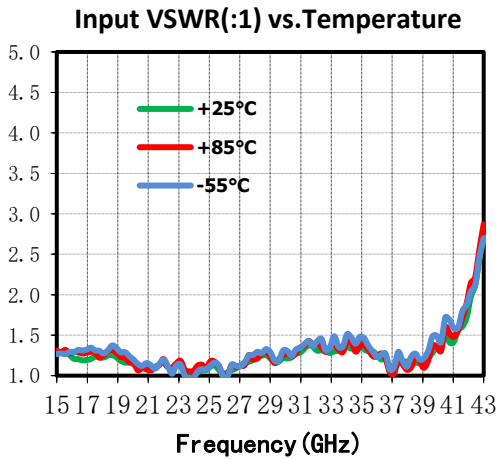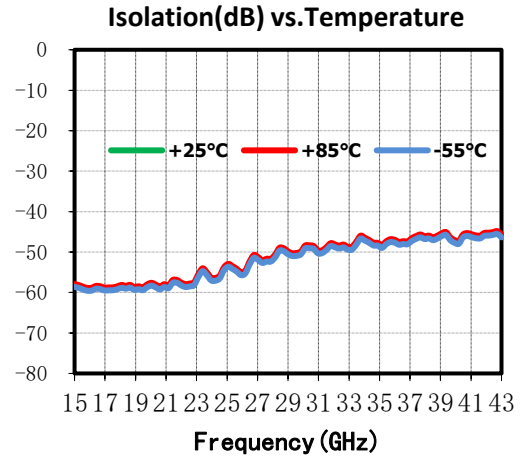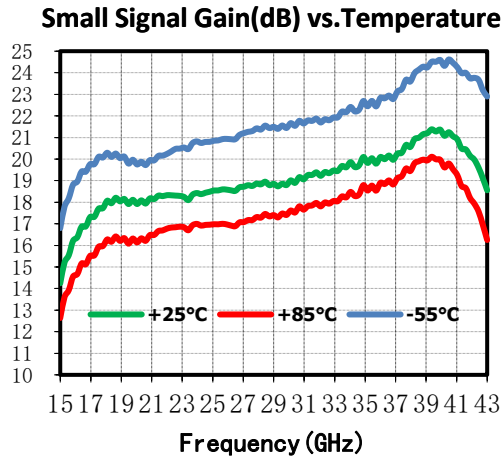

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3941A




GaAs MMIC Power Amplifier
18GHz~41GHz 21dBm

Rev 1.0


OP-3dB (dBm) vs. Temperature

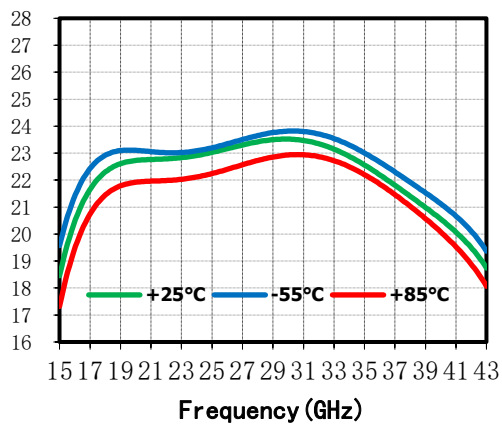


Noise Figure (dB) vs. Frequency

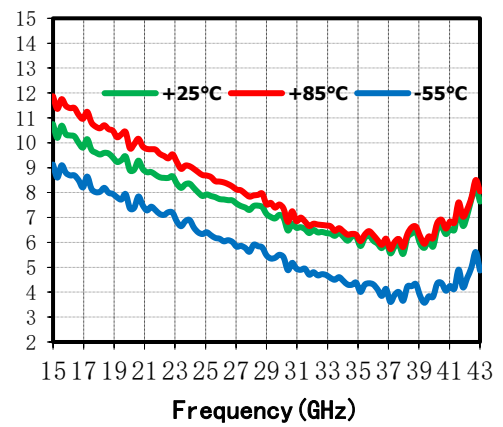

IM3 (dBC) vs. Pout/Tone

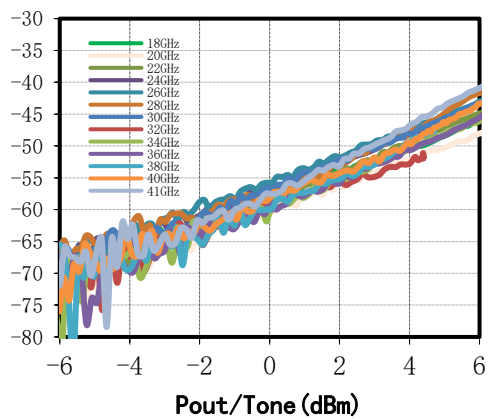

OIP3 (dBm) vs. Frequency

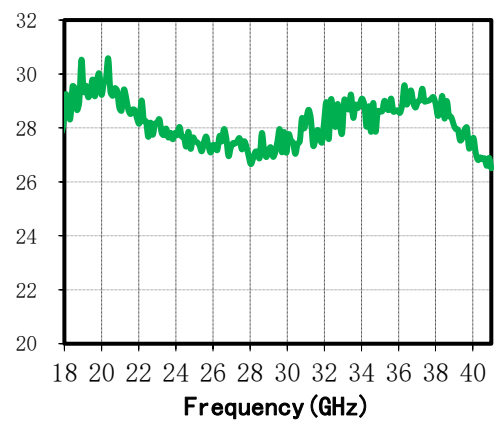

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3941A




GaAs MMIC Power Amplifier
18GHz~41GHz 21dBm

Rev 1.0

Die Outline(μm)

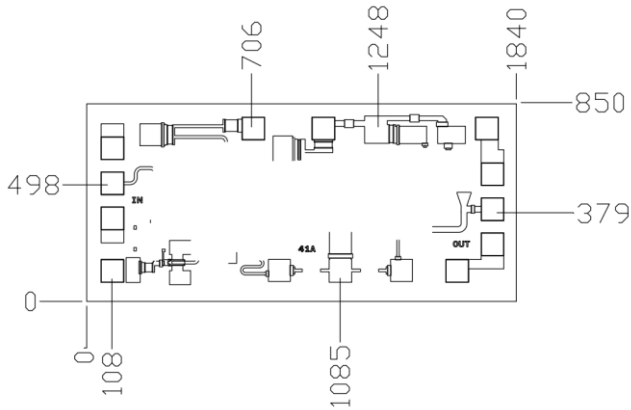

Assembly Diagram

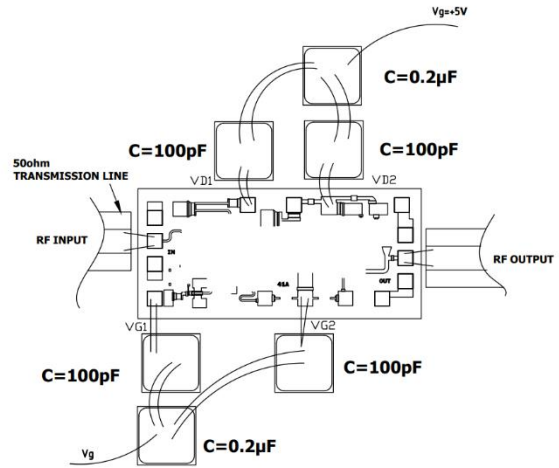

Notes

1. SAC3941A is biased with a positive drain supply (VDx) and negative gate supply (VGx). Before applying the drain positive voltage, it is necessary to ensure that the gate negative voltage has been applied;
2. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 25 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized. The RF input require a single bond wire output require a double bond wire as shown;
3. The backside of SAC3941A is RF ground. Eutectic mounting is preferred, if using conductive epoxy, recommended epoxies are CT2700R7S or EK2000 cured per the manufacturer's cure schedule. Epoxy should be applied in accordance with the manufacturers specifications and should avoid contact with the top surface of the die. An epoxy fillet should be visible around the total die periphery.

Revision History

Revision	Date	Comment
1.0	Sep 03, 2024	First Release

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com