


| Revisions | | | |
|-----------|-------------|------|----------|
| Rev | Description | Date | Approved |
| | | | |
| | | | |

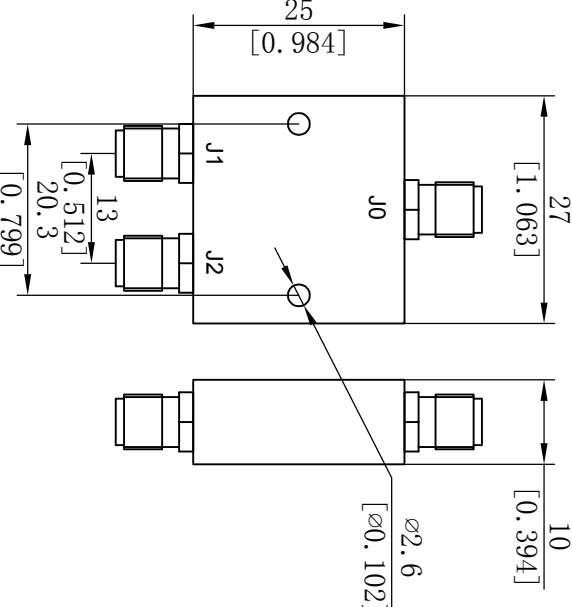

| | | | | | | |
|---------------|---------------|---|-------------|--------------|----------|------|
| Drawn | Date | UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ON DECIMALS | | ON ANGLES | Scale | |
| Engineering | JUL. 30, 2021 | ± .5° | | Drawing Size | | |
| QA | Date | Material | Drawing No. | | Revision | Qty. |
| Manufacturing | Date | Alumina | | Used On | | |
| Released | Date | Finish | | | | |

| Parameter | Min. | Typ. | Max. | Units |
|-------------------|-------------|------|------|---------|
| Frequency | 2 | | 4 | GHz |
| Insertion Loss | | | 0.5 | dB |
| Isolation | 20 | | | dB |
| VSWR | | | 1.3 | -1 |
| Input Power | | | 10 | W |
| Amplitude Balance | | | 0.2 | dB |
| Phase Balance | | | 4 | Degrees |
| Operation Temp. | -20 | | +60 | °C |
| Storage Temp. | -40 | | +85 | °C |
| Package | Coaxial | | | |
| Connector | SMA(F) | | | |
| Weight | 50gram Max. | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

2-Way Divider Module

| | |
|--------------|----------|
| Drawing No. | Revision |
| Used On | Qty. |
| Sheet 1 of 1 | |