

SAC3085QP3

GaAs MMIC Low Noise Amplifier
0.02~8GHz

Rev 1.1

Features

- Frequency: 0.02~8GHz
- Gain: 18dB
- Noise Figure: 1.3dB Typ. 1.8dB Max
- Output P_{1dB}: 17dBm
- Power Supply: +5V@80mA
- Package Size: 3mmx3mmx1.1mm

Typical Applications

- SDR
- Test and Measurement


General Description

SAC3085QP3 is a GaAs MMIC Low Noise Amplifier in QFN surface mount package, which operates between in 0.02~8GHz.

The amplifier can provide 18dB of gain, 17dBm of Output P_{1dB} and 1.3dB noise figure and from a 80mA supply current.

SAC3085QP3 is assembled in a 3mm x 3mm QFN plastic package.

Picture

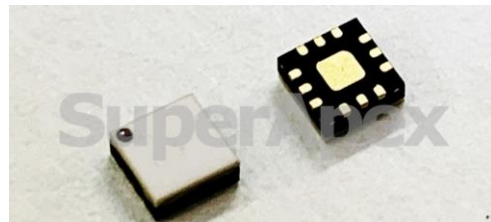

Electrical Performance (T_A=25°C, V_D=+5V, I_D=80mA, Z₀=50Ω)

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.02~8			GHz
Gain	15	18	24	dB
Gain Flatness	—	±1.5	±2.5	dB
Input VSWR/ Output VSWR	—	1.5	2.5	:1
Noise Figure	—	1.3	1.8	dB
Reverse Isolation	—	-22	—	dB
Output P _{1dB}	15	17	—	dBm
Output IP ₃	—	33	—	dBm
Supply Current(I _D)	—	80	100	mA

Absolute Maximum Ratings

Maximum Input Power	+14dBm,CW 30s	Operating Temperature	-55°C~+85°C
Channel Temperature	+150°C	Storage Temperature	-55°C~+150°C
Supply Voltage	+6V		

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3085QP3




GaAs MMIC Low Noise Amplifier
0.02~8GHz

Rev 1.1


Typical Performance Curve

$V_D=+5V, I_{DQ}=80mA$, The following curves are taken from SAC3085QP3 evaluation board. No De-embedding operation has been Implemented.


Small Signal Gain(dB) vs.Temperature

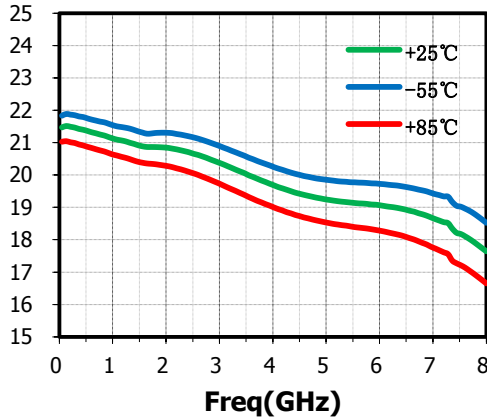


Reverse Isolation(dB) vs.Temperature

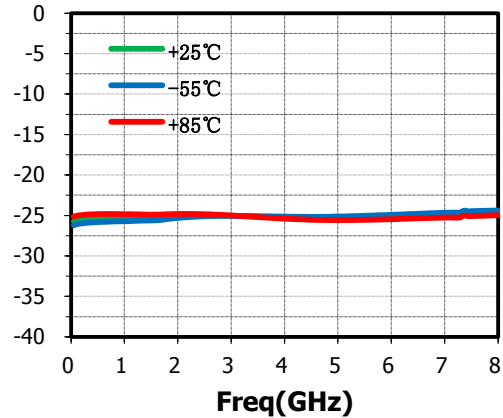


Input VSWR(:1) vs.Temperature

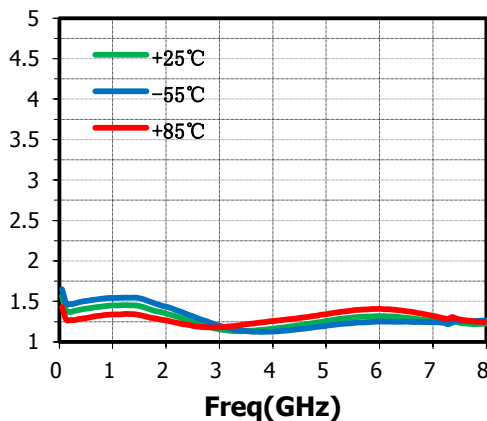


Output VSWR(:1) vs.Temperature

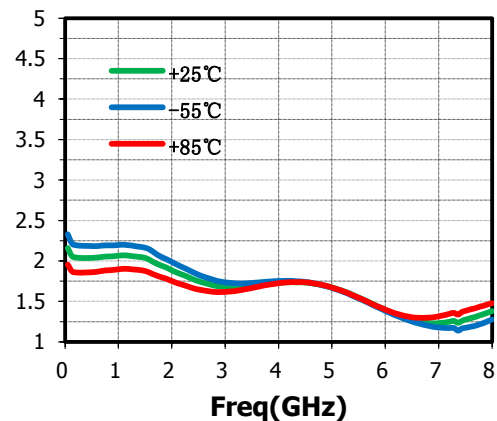

Output P-1dB(dBm) vs.Temperature

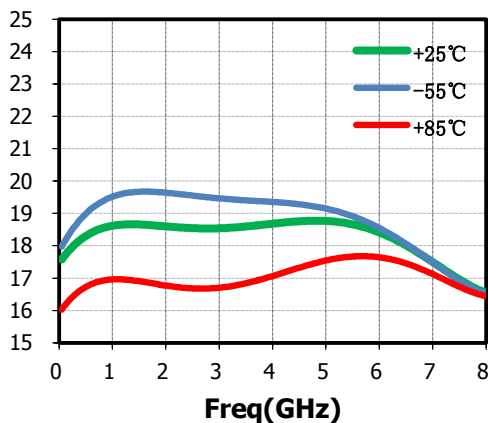

Output IP₃(dBm) vs. Temperature

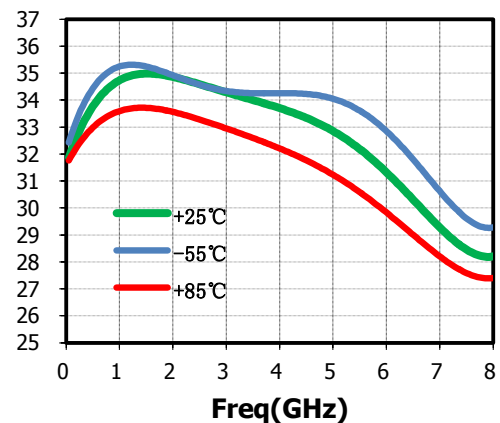


SAC3085QP3




GaAs MMIC Low Noise Amplifier
0.02~8GHz

Rev 1.1


Noise Figure(dB) vs.Temperature

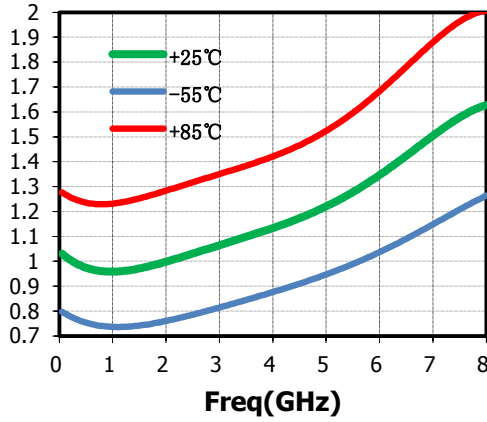


Noise Figure(dB) vs.Temperature

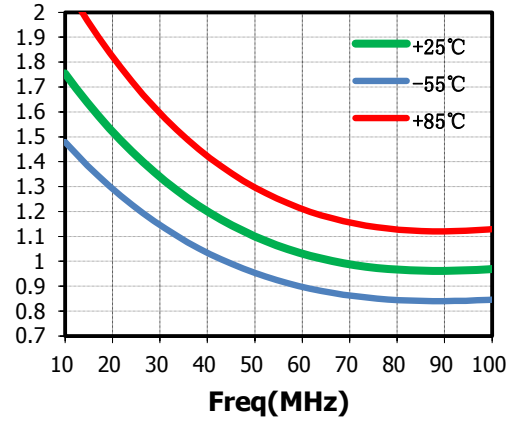


K factor vs.Temperature

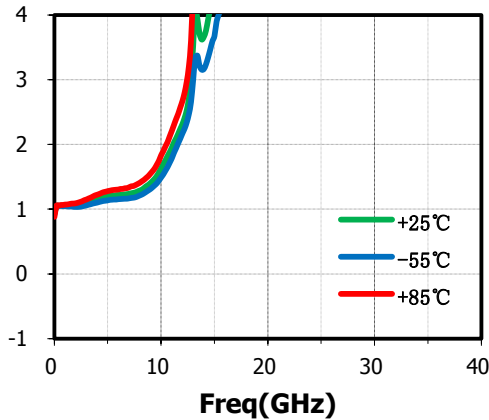

Outline Drawing
(All dimensions in mm)

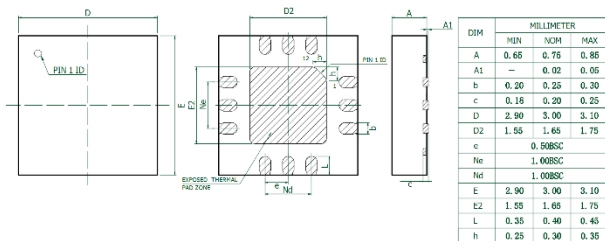

Application Circuit

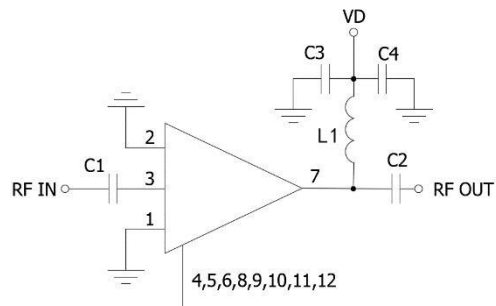

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA

Tel: 1-847-505-8319, 1-847-573-9866


E-mail: sales@superapexco.com

Website: www.superapexco.com

Pin Function

Pin No.	Description	Pin No.	Description
1	Connect to ground	7	RF output, DC Coupled
2	Connect to ground	8	Connect to ground
3	RF input, DC Coupled	9	Connect to ground
4	Connect to ground	10	NC or Connect to ground
5	Connect to ground	11	NC or Connect to ground
6	Connect to ground	12	NC or Connect to ground

SAC3085QP3 Evaluation Board

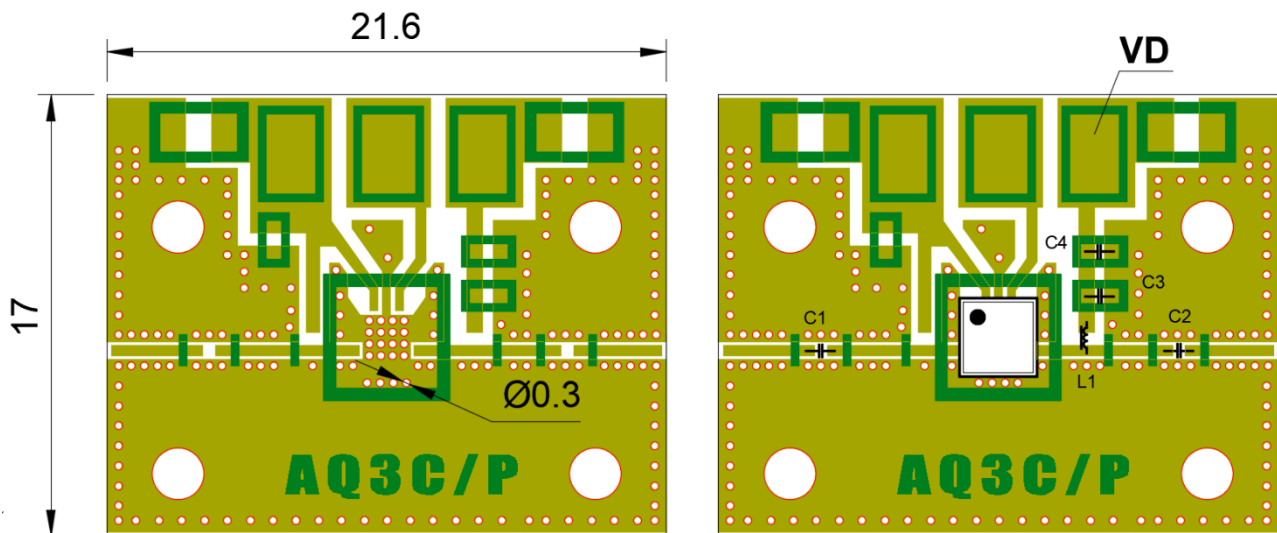

Evaluation board is a 2-layer board fabricated using Rogers 4350 t=0.254 and using best practices for high frequency RF design. The RF input and RF output traces have a 50 Ω characteristic impedance.

Components List

Reference Des.	Value	Part Number	Manuf.
C1、 C2、 C3	300pF	GRM1555C1H301JA	Murata
C4	1uF	GRM0336R61A105KE	Murata
L1	-	MMZ1005A222	TDK

Attention:

1. The moisture resistant grade of products is 2a, the storage environment $\leq 30^{\circ}$ C/60% RH, The surrounding workshop life is 4 weeks.
2. After un-packing, It is necessary to bake the parts for 6 hours in 125+/-5 degree environment before soldering.
3. There is an additional resistor, inductor, and capacitor (RLC) shunt network that aids unconditional stability.

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com