

# SAC3937AQP4

GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0

## Features

- Frequency:0.03~3GHz
- SS Gain:16dB
- OP<sub>-1dB</sub>:30dBm typ. ,29dBm min.
- Power supply:+12V
- Package:4mm×4mm×0.75(Typ.) mm
- Bare die:1.25 mm x1.55 mm x0.1mm

## General Description

SAC3937AQP4 is a GaAs MMIC self-biased Driver Amplifier in QFN surface mount package, which operates between in 0.1~3GHz.


SAC3937AQP4 can provide 16dB of gain, 30dBm of output P<sub>-1dB</sub> while requiring 360mA from a single +12V supply voltage.

SAC3937AQP4 is assembled in a 4mm x 4mm RoHS-compliant low stress injection molded plastic QFN package

## Typical Applications

- IF Amplifier
- Driver Amplifier

## Functional Diagram

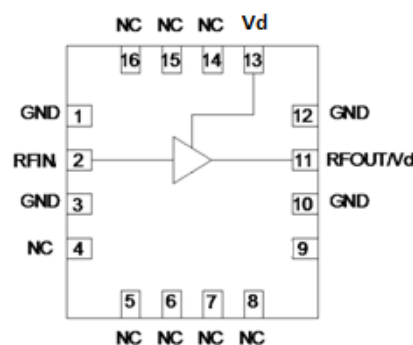

## Electrical Performance

T<sub>A</sub>=25°C, V<sub>D</sub>=+12V, I<sub>DQ</sub>=0.36A, Z<sub>0</sub>=50Ω, CW

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.03	—	3	GHz
Small Signal Gain	14	16	—	dB
Gain Flatness	—	±0.5	±1	dB
Reverse Isolation	—	-24	—	dB
RF Input VSWR	—	1.5	2.5	:1
Output P <sub>-1dB</sub>	f=0.1GHz	—	29	dBm
	f=1.5GHz	—	30	
	f=3GHz	—	29	
Supply Current (ID)	—	—	0.45	A
Thermal Resistance		16.9		°C/W

## Absolute Maximum Ratings

Maximum Input Power	+20dBm	Operating Temperature	-55°C~+85°C
Channel Temperature	+165°C	Storage Temperature	-55°C~+150°C
Maximum VD	+13.5V		

## SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3937AQP4


GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0


## Typical Performance Curve

$V_D=+12V$ ,  $T_A=+25^\circ C$ , The following curves are taken from SAC3937AQP4 evaluation board


### Small Signal Gain(dB) vs.Temperature

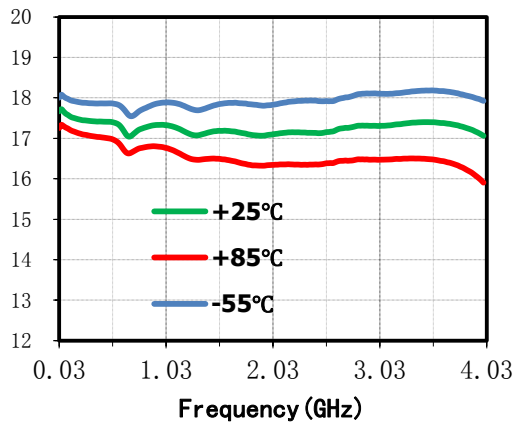


### Isolation(dB) vs.Temperature

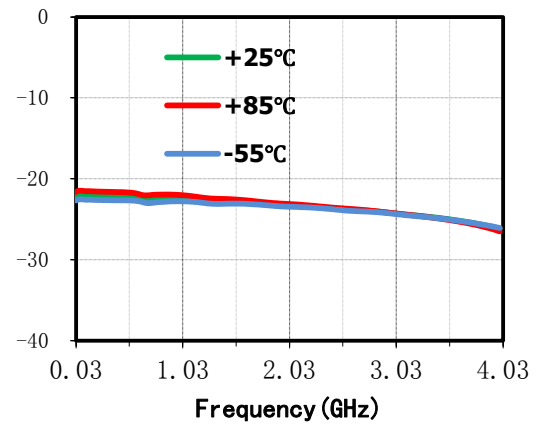


### Input VSWR(:1) vs.Temperature

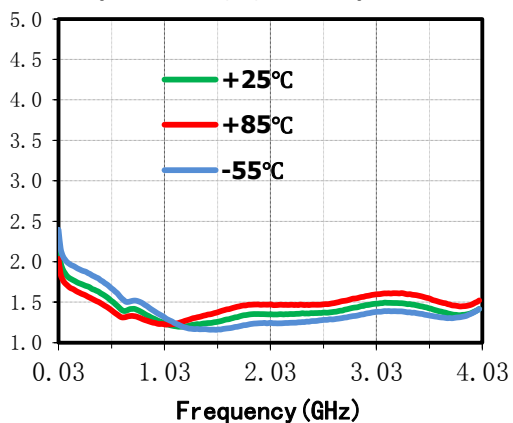


### Output VSWR(:1) vs.Temperature

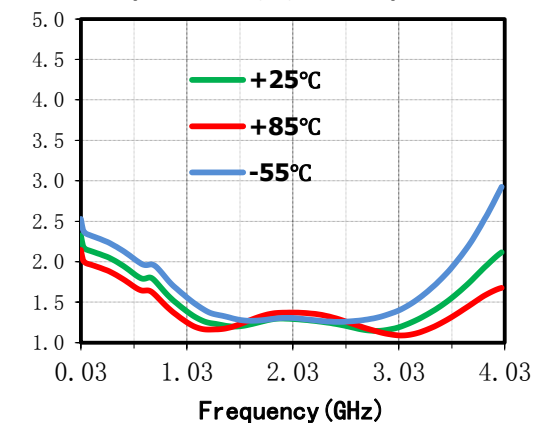

### Output P<sub>1</sub> dB(dBm) vs.Temperature

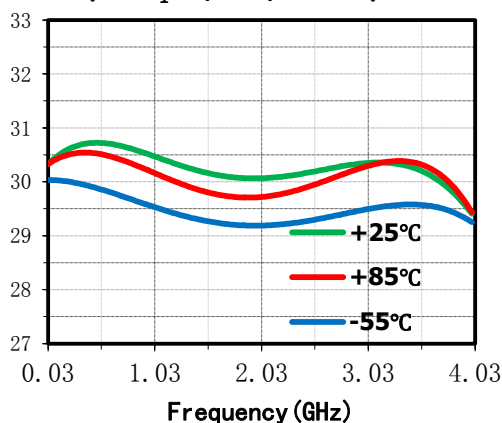

### Output IP<sub>3</sub> (dBm) vs. Frequency

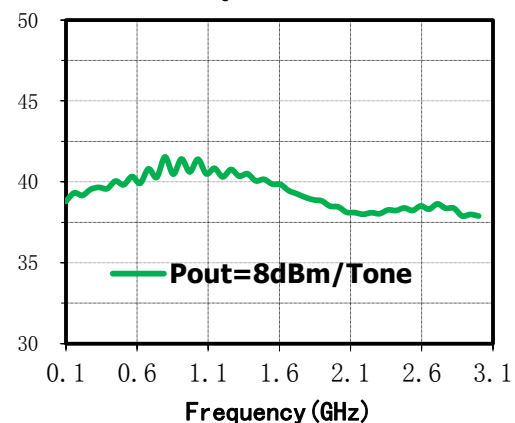

## SuperApex Corporation


Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3937AQP4


GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0


Output  $IP_2$  (dBm) vs. Frequency

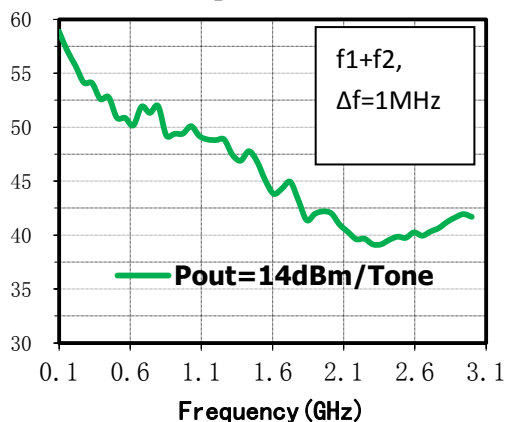


IM3 (dBc) vs. Pout/Tone

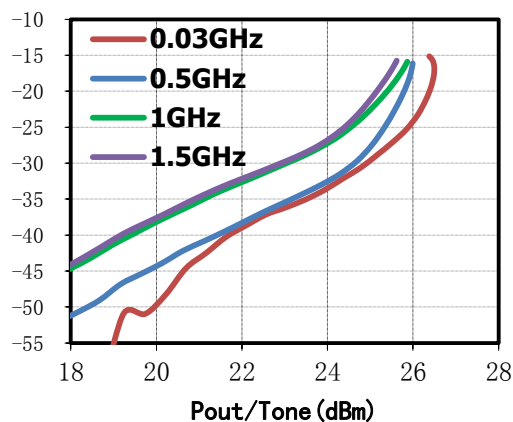


IM3 (dBc) vs. Pout/Tone

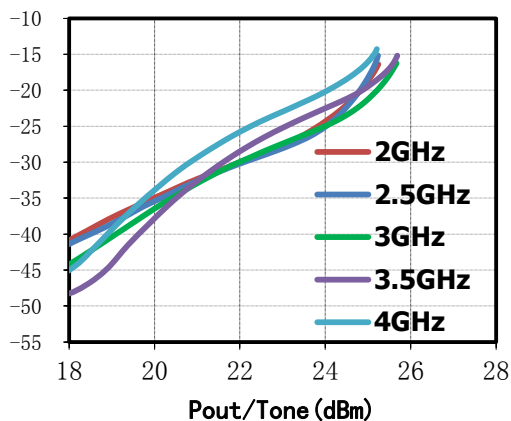


IM5 (dBc) vs. Pout/Tone

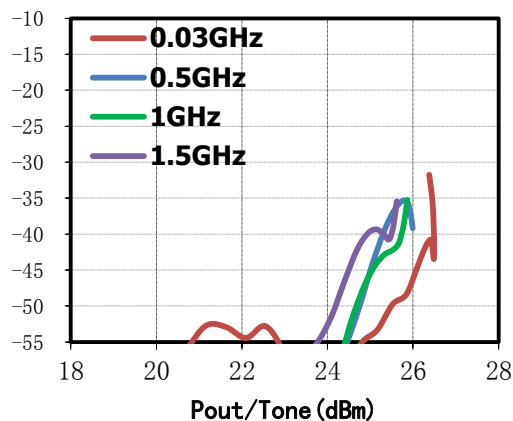

IM5 (dBc) vs. Pout/Tone

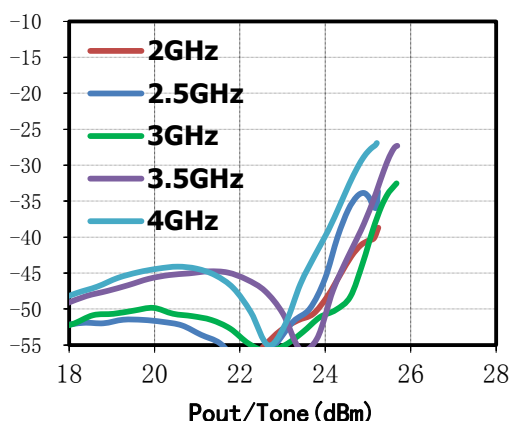

2<sup>nd</sup>Harmonic(dBc) vs. Pin

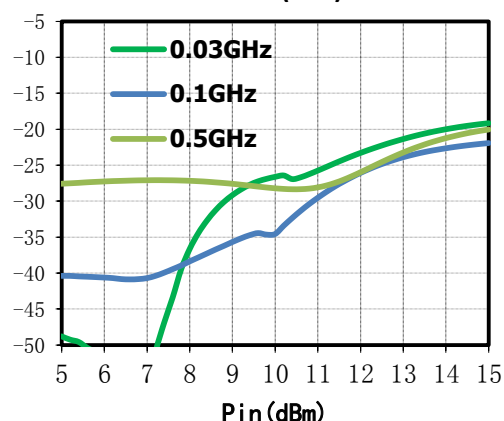

## SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com


# SAC3937AQP4




GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0


2<sup>nd</sup>Harmonic(dBc) vs.Pin

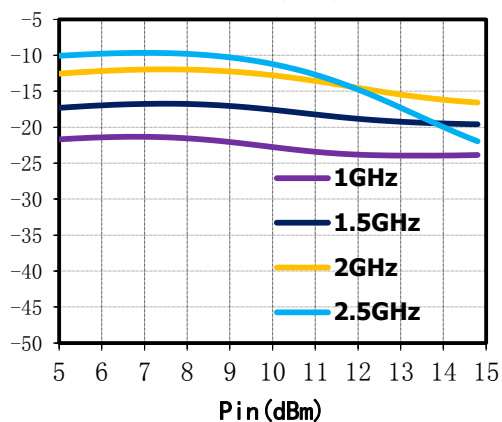


2<sup>nd</sup>Harmonic(dBc) vs.Pin

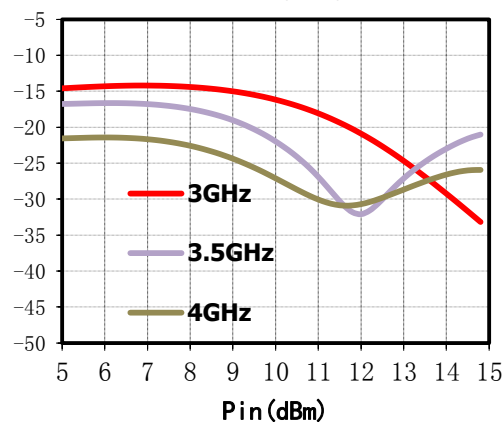


3<sup>rd</sup>Harmonic(dBc) vs.Pin

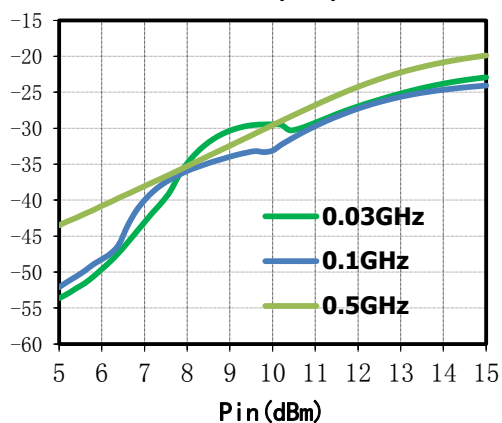


3<sup>rd</sup>Harmonic(dBc) vs.Pin

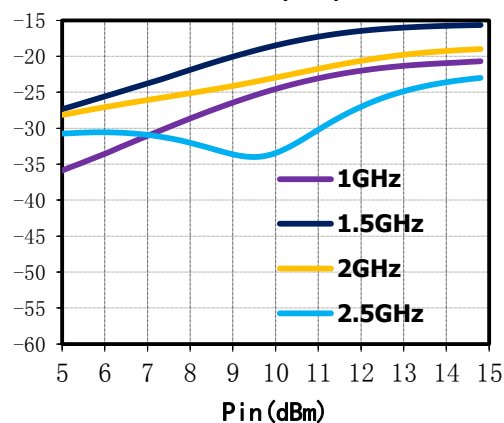

3<sup>rd</sup>Harmonic(dBc) vs.Pin

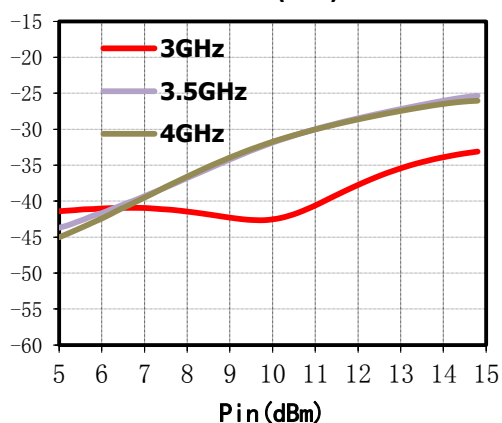

I<sub>D</sub> (A) 、 PAE (%) vs. P<sub>out</sub>, f=0.02GHz

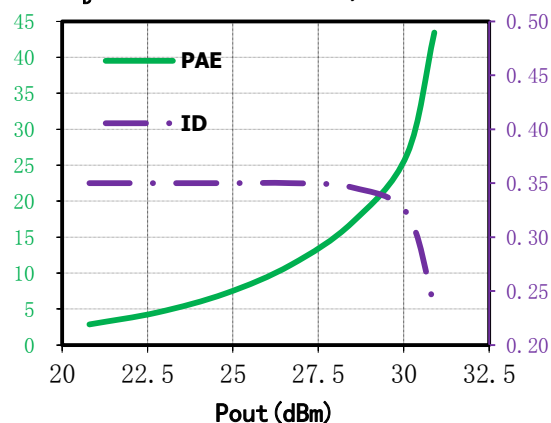

## SuperApex Corporation







Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC3937AQP4



GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0

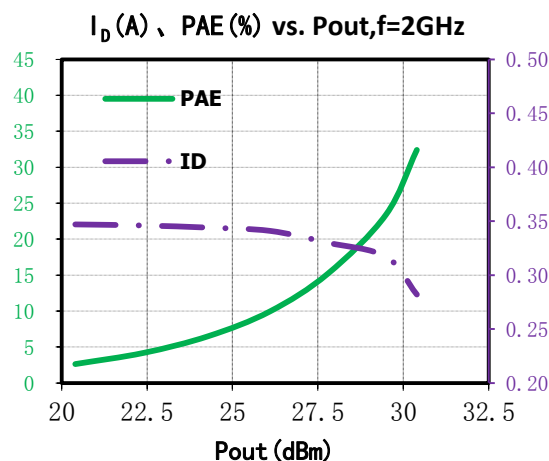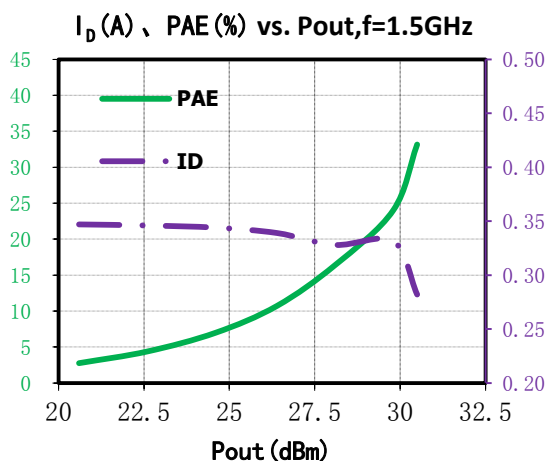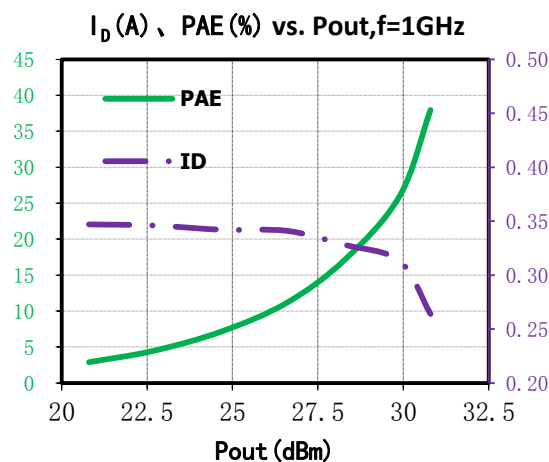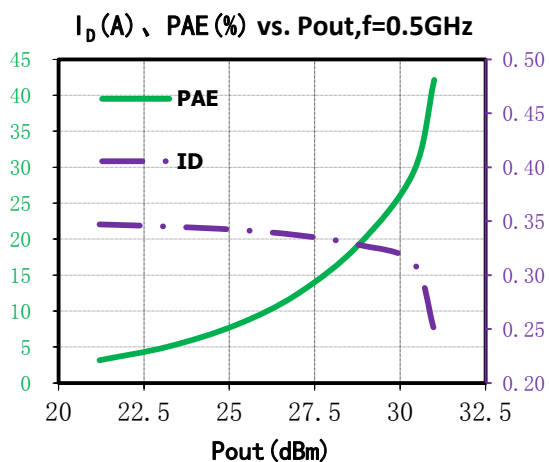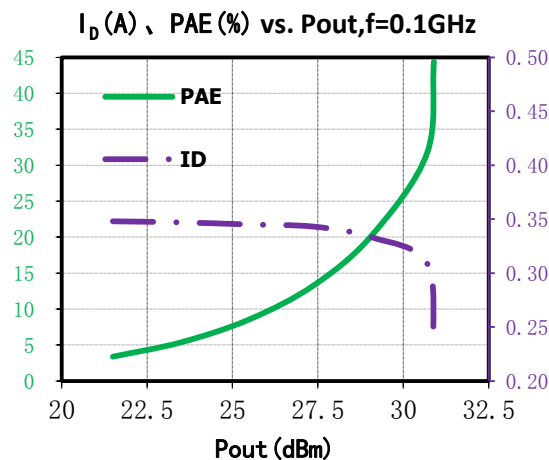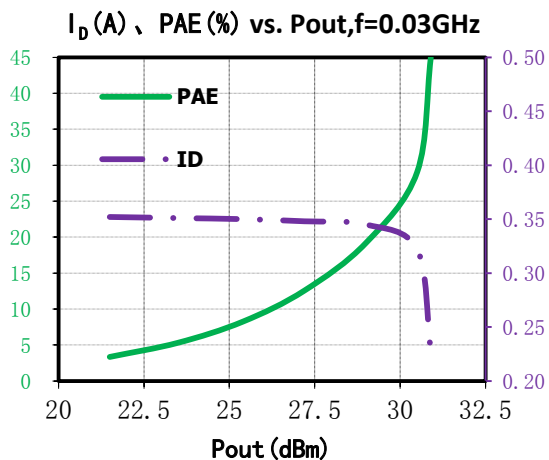

**SuperApex Corporation**







Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
 Tel: 1-847-573-9866, 1-847-505-8319  
 E-mail: sales@superapexco.com  
 Website: www.superapexco.com

# SAC3937AQP4



GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0

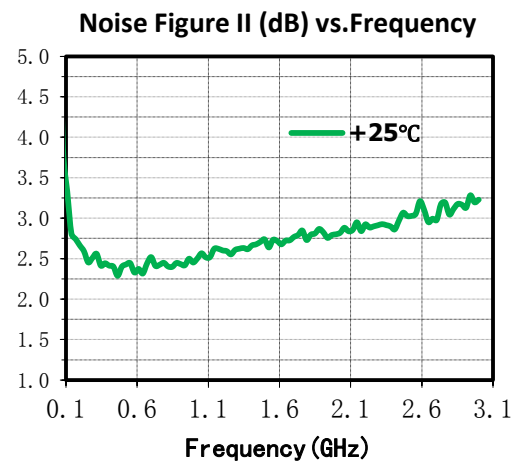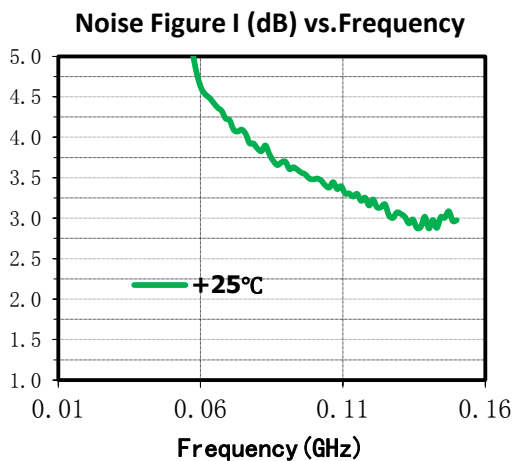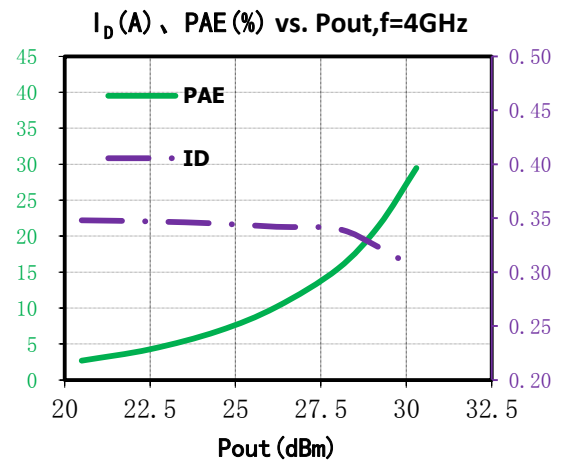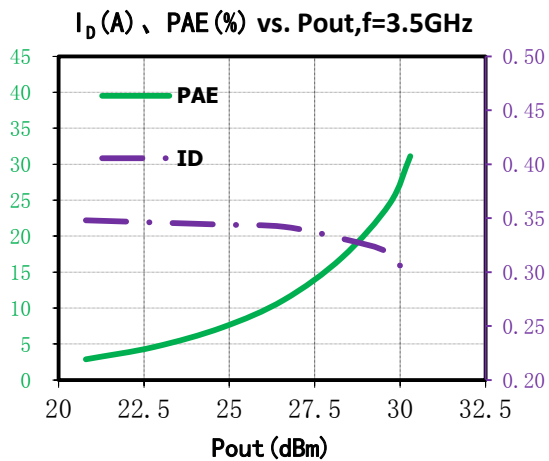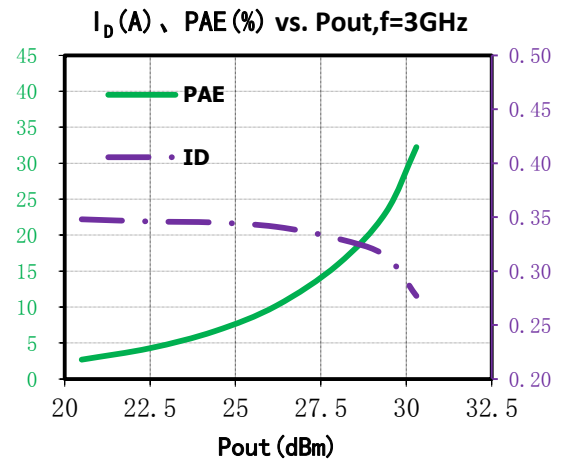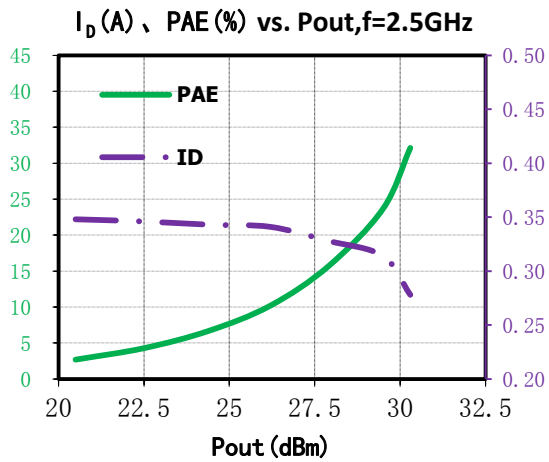

**SuperApex Corporation**


Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
 Tel: 1-847-573-9866, 1-847-505-8319  
 E-mail: sales@superapexco.com  
 Website: www.superapexco.com

# SAC3937AQP4


GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0


K factor(U) vs.Frequency

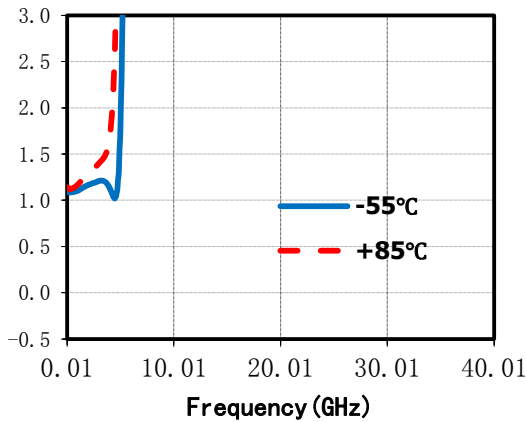

Outline Drawing

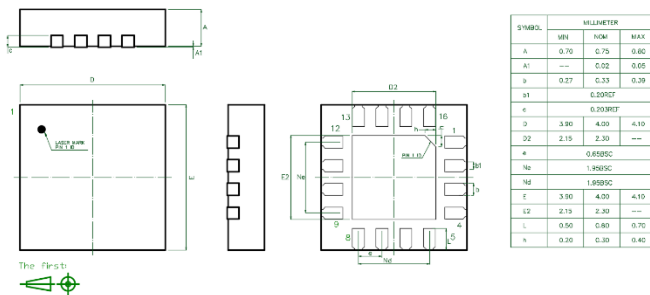

Application Circuit

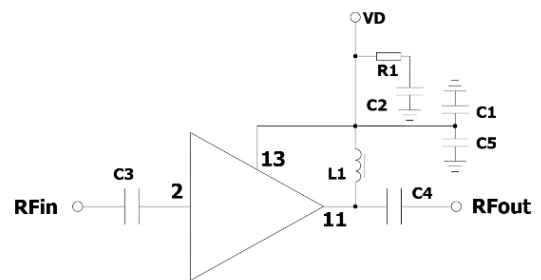

BOM


Reference Des.	Value	Part Number	Manuf.	Size
C5	22 $\mu$ F	---	---	1210
C3、C4、C1	430pF	---	---	0402
L1	1.3 $\mu$ H	4310LC-132	Coilcraft	-
R1	2.2 $\Omega$	---	---	0402
C2	0.1 $\mu$ F	---	---	0402

# SAC3937AQP4

GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0

## SAC3937AQP4 Evaluation Board

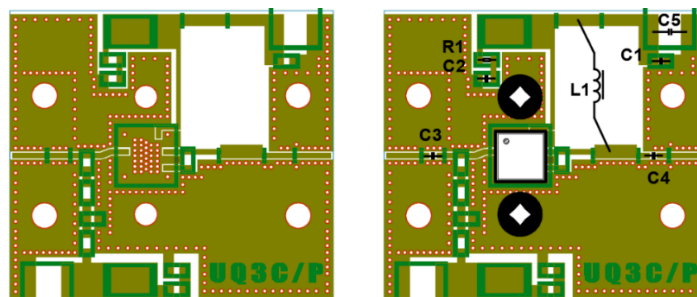


The evaluation board is a 2-layer board fabricated using Rogers 4350b  $t=0.254$  and using best practices for high frequency RF design. The RF input and RF output traces have a  $50\ \Omega$  characteristic impedance.

The bottom center pad of SAC3937AQP4 is used for RF grounding and heat dissipation. For best heat dissipation, copper-filled vias are highly recommended, SAC3937AQP4 is high power dissipation surface mount components and require a well-designed thermal mount. All the heat generated by the device is expected to be removed through the bottom heat slug with a low thermal resistance path to the chassis.


The use of multiple copper-filled vias or solder-filled vias under the package's heat slug while using a indium foil between the PCB and chassis provides a low thermal resistance mount, Insufficient number of vias or insufficient solder filling will significantly affect the heat dissipation process of the device, and then reduce the performance or even damage the device.

### Bare Die Outline ( $\mu\text{m}$ )



Pad size  $150 \times 100 \mu\text{m}^2$ ,  $t=100 \mu\text{m}$

### Assembly Diagram

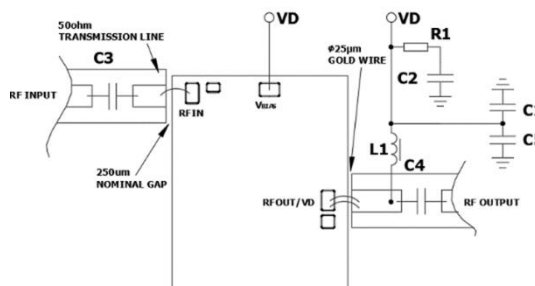

### SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com



# SAC3937AQP4



GaAs MMIC Driver Amplifier  
0.03GHz~3GHz 30dBm

Rev 1.0

## Attention:

1. The moisture resistant grade of SAC3937AQP4 is 2a, the storage environment  $\leq 30^{\circ}$  C/60% RH, the surrounding workshop life is 4 weeks;
2. After un-packing, it is necessary to bake the parts for 6 hours in  $125 \pm 5$  degree environment before soldering;
3. GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test;
4. The back of bare chip is RF and DC ground;
5. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 1 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized.

## Revision History

Revision	Date	Comment
1.0	Nov 2, 2021	First Release

---

### SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-573-9866, 1-847-505-8319  
E-mail: sales@superapexco.com  
Website: www.superapexco.com