

Features

- Frequency: 2GHz ~ 4GHz
- Gain: 27dB
- Noise Figure: 0.6dB
- Output P_{1dB}: 8dBm
- Power Supply: +5V@30mA
- Package Size : QFN3x3mm

Typical Applications


- Microwave radio
- Telecommunication
- Test instrumentation

General Description

SAC3056Q3 is a GaAs MMIC Low Noise Amplifier in leadless 3x3mm surface mount package, which operates between 2GHz ~ 4GHz. The amplifier can provide 27dB gain, 8dBm Output P_{1dB}, 0.6dB noise figure from a +5V supply voltage.

The amplifier I/O's are internally matched to 50 Ohms.

Functional Diagram

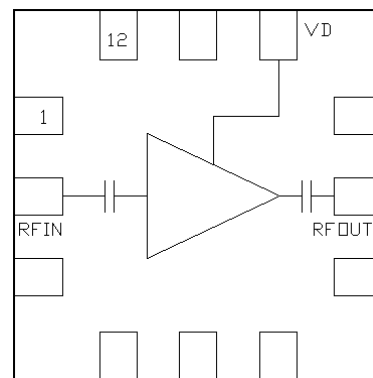

Electrical Performance (T_A=25°C, V_D= +5V, I_D=30mA, Z₀=50Ω)

Parameter	Min	Typ.	Max	Units
Frequency Range	2 ~ 4			GHz
Gain	23	27	—	dB
Gain Flatness	—	±1.5	—	dB
Reverse Isolation	-30	-45	—	dB
Input/Output Return Loss	—	-13	-9	dB
Noise Figure	—	0.6	0.8	dB
Output Power for 1 dB Compression (OP _{1dB})	5	8	—	dBm
Output IP ₃ *	—	19	—	dBm
Supply Voltage (V _D)	4.85	5	5.5	V
Supply Current(I _D)	—	30	—	mA

*Pout / Tone = 0dBm, fc= 3GHz, Δf=5MHz

Absolute Maximum Ratings

Maximum Input Power	+12dBm	Operating Temperature	-40°C ~ +85°C
Channel Temperature	150°C	Storage Temperature	-65°C ~ +150°C
Maximum V _D	+5.7V		

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3056Q3




GaAs MMIC Low Noise Amplifier
2GHz~4GHz NF 0.6dB

Rev 1.2


Typical Performance Curve

The results captured in the test-jig environment within connector plan, then de-embedded the housing and come back in the package plan


Small Signal Gain(dB) vs.Temperature

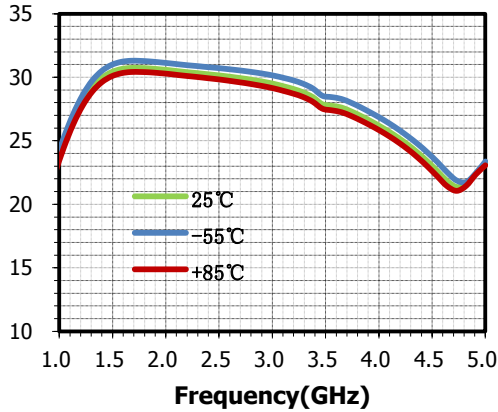


Reverse Isolation(dB) vs.Temperature

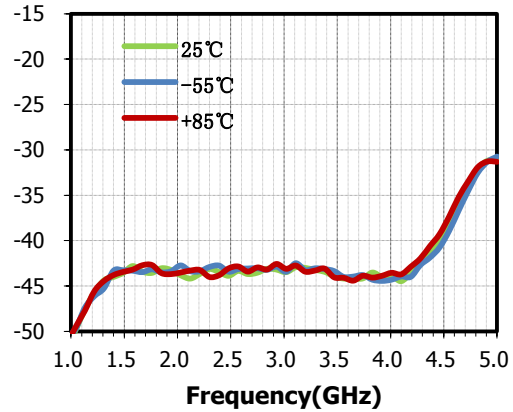


Input Return Loss(dB) vs.Temperature

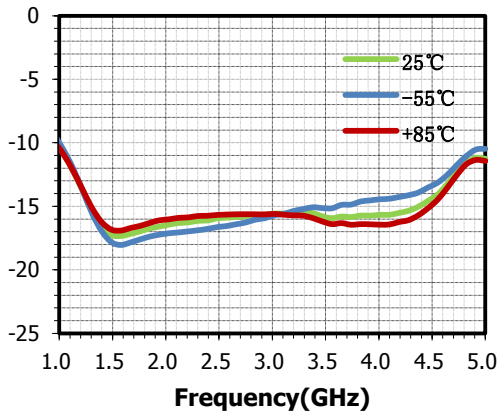


Output Return Loss(dB) vs.Temperature

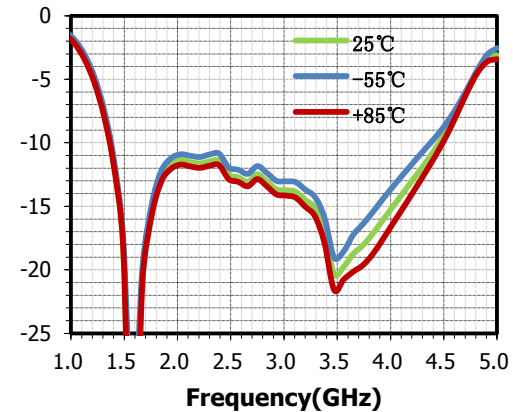

OP₁dB(dBm) vs.Temperature

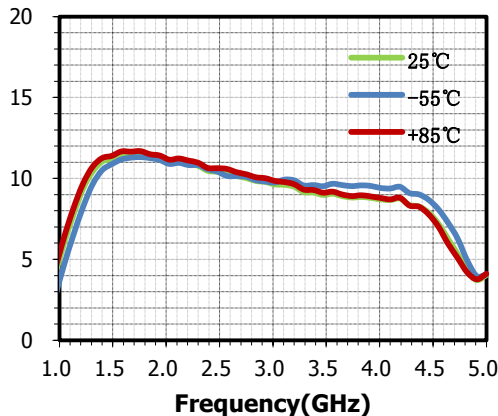

Noise Figure(dB) vs.Temperature

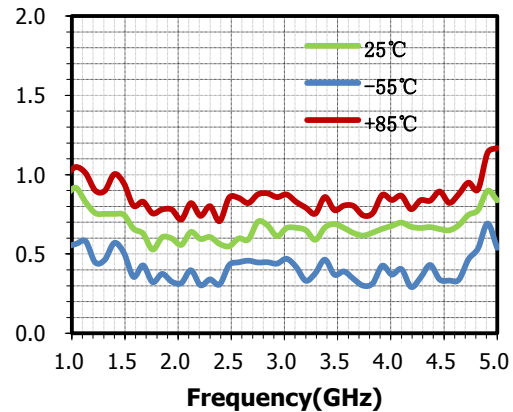


SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3056Q3

GaAs MMIC Low Noise Amplifier
2GHz~4GHz NF 0.6dB

Rev 1.2

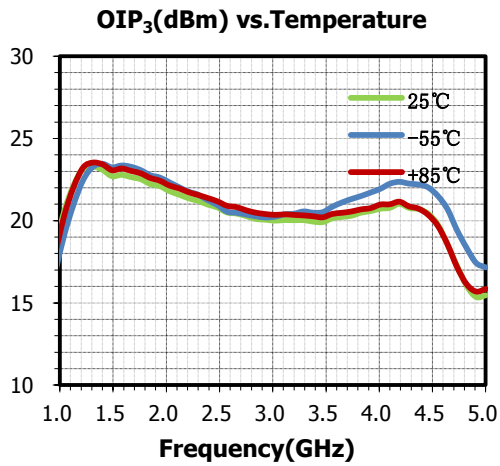


Outline Drawing (All dimensions in mm)

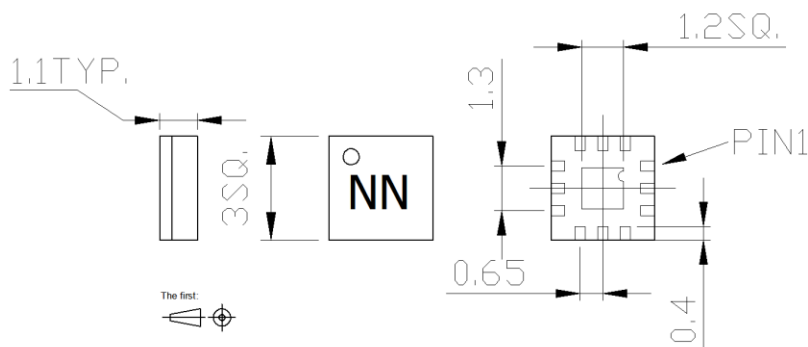

Pin Function

Pin No.	Func.	Pin No.	Func.	Pin No.	Func.
1	Connect to GND	10	VD Supply		
2	RF IN	11	Connect to GND		
3	Connect to GND	12	Connect to GND		
4	Connect to GND				
5	Connect to GND				
6	Connect to GND				
7	Connect to GND				
8	RF OUT				
9	Connect to GND				

Application Circuit

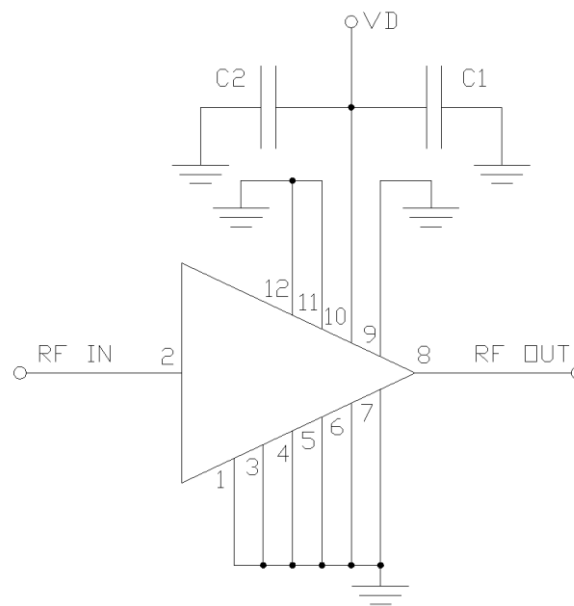

Component list

Reference Des.	Value	Part Number	Manuf.	Size
C1	0.01uF	GRM15R71H103K	MURATA	0402
C2	4700pF	GRM1555C1H472J	MURATA	0402

Attention:

1. The moisture resistant grade of products is 2A, the storage environment $\leq 30^{\circ}$ C/60% RH, The surrounding workshop Life is 4 weeks.
2. After un-packing, It is necessary to bake the parts for 6 hours in 125+/-5 degree environment before soldering.