

# SAC4000Q3

GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0

## Features

- Frequency: 0.7~3.5GHz
- Gain: 22dB
- Noise Figure: 0.7dB Typ. 1dB Max
- Output P<sub>1dB</sub>: 19dBm@+5V
- Power Supply: +3~+5V/30~80mA
- Package Size: 3mmx3mmx1.1mm
- Bare die size: 1.1mmx1.3mmx0.1mm

## Typical Applications

- Wideband Communication Systems


## General Description

SAC4000Q3 is a GaAs MMIC Low Noise Amplifier in QFN air cavity surface mount package, which operates between in 0.7~3.5GHz.

The amplifier can provide 22dB of gain, 19dBm of output P<sub>1dB</sub> and 0.7dB noise figure and from an 80mA supply current.

SAC4000Q3 is assembled in a 3mm x 3mm x 1.1mm QFN plastic package

## Functional Diagram



## Electrical Performance (T<sub>A</sub>=25°C, V<sub>D</sub>=+5V, I<sub>D</sub>=80mA, Z<sub>0</sub>=50Ω)

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.7~3.5			GHz
Gain	19	21	—	dB
Gain Flatness	—	±1	±1.5	dB
Input VSWR/ Output VSWR	—	1.5	2.2	:1
Noise Figure	—	0.5	1	dB
Reverse Isolation	—	-28	—	dB
Output P <sub>1dB</sub>	17	19	—	dBm
Output IP <sub>3</sub>	—	30	—	dBm
Supply Current (I <sub>D</sub> )	—	80	100	mA

## Absolute Maximum Ratings

Maximum Input Power	+16dBm, CW 30s	Operating Temperature	-55°C~+85°C
Channel Temperature	+150°C	Storage Temperature	-55°C~+150°C
Supply Voltage	+5.5V		

## SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA

Tel: 1-847-505-8319, 1-847-573-9866

E-mail: sales@superapexco.com

Website: www.superapexco.com

# SAC4000Q3




GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0


## Typical Performance Curve

$V_D=+5V, I_{DQ}=80mA$ , The following curves are taken from SAC34000Q3 evaluation board.


**Small Signal Gain(dB) vs. Temperature**

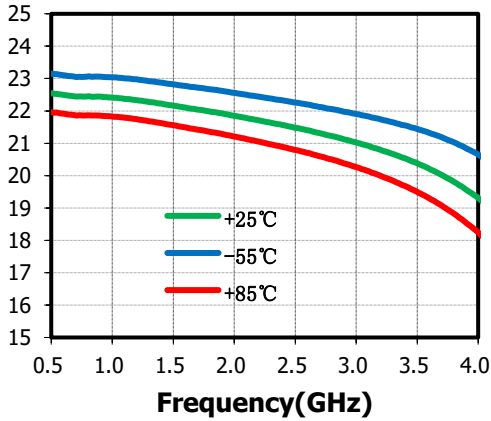


**Reverse Isolation(dB) vs. Temperature**

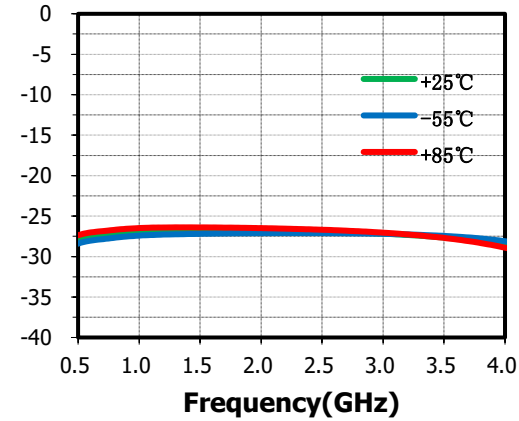


**Input VSWR(:1) vs. Temperature**

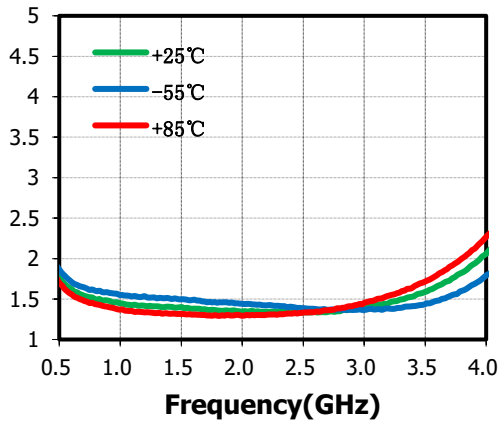


**Output VSWR(:1) vs. Temperature**

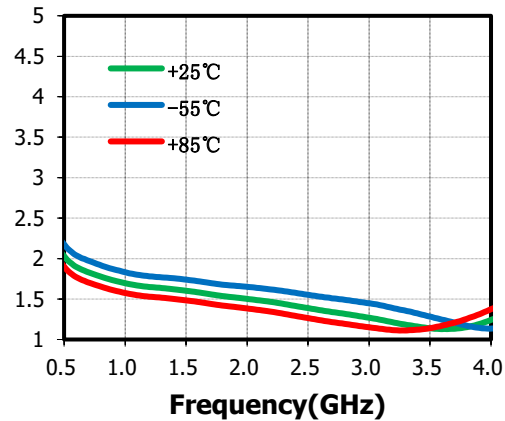

**Small Signal Gain(dB) vs.  $V_D, T_A=+25^\circ C$**

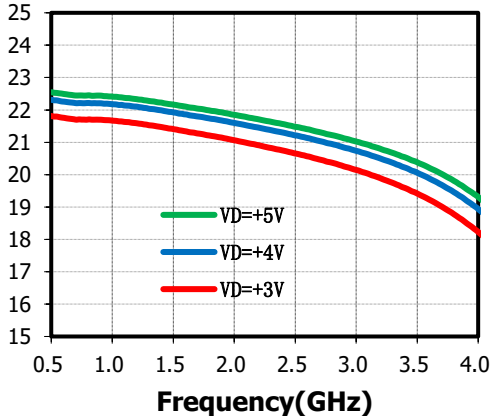

**Reverse Isolation(dB) vs.  $V_D, T_A=+25^\circ C$**

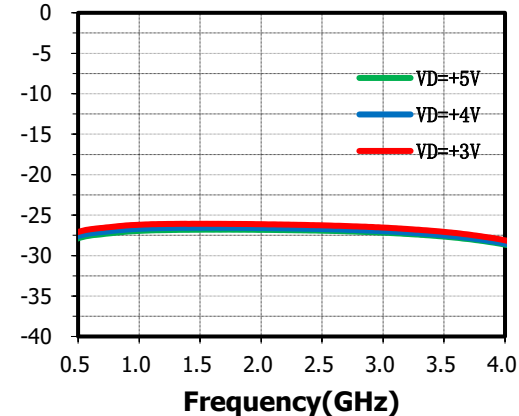

### SuperApex, LLC







1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC4000Q3



GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0

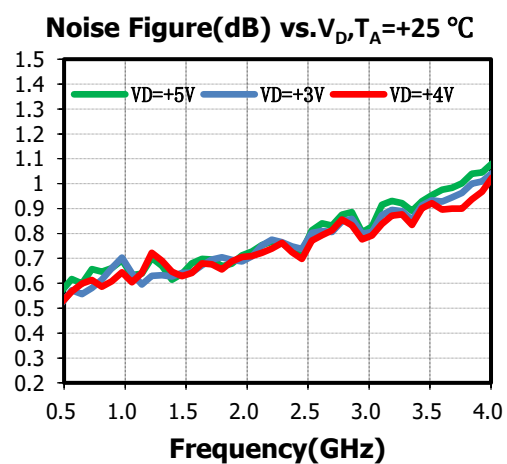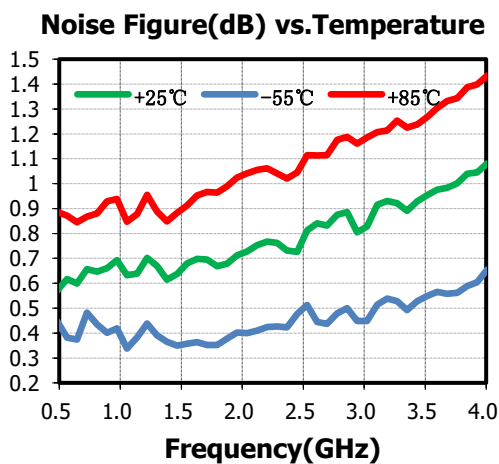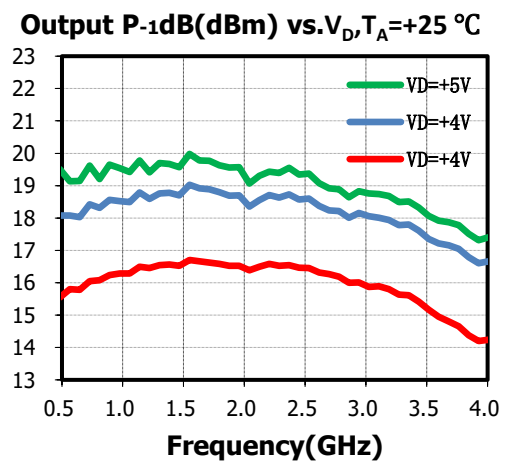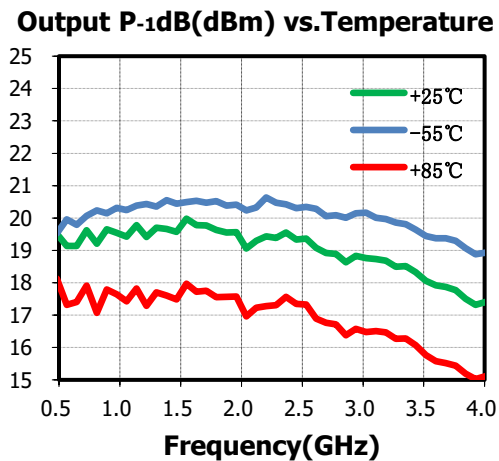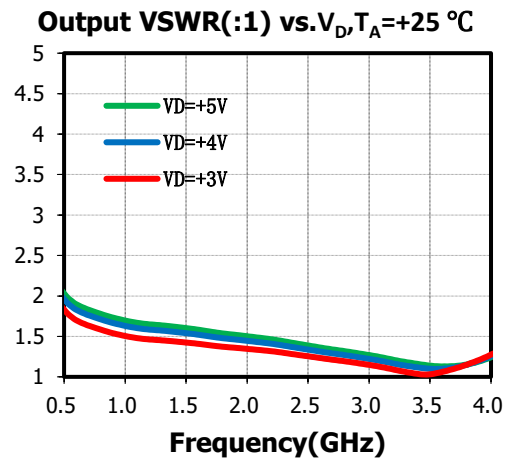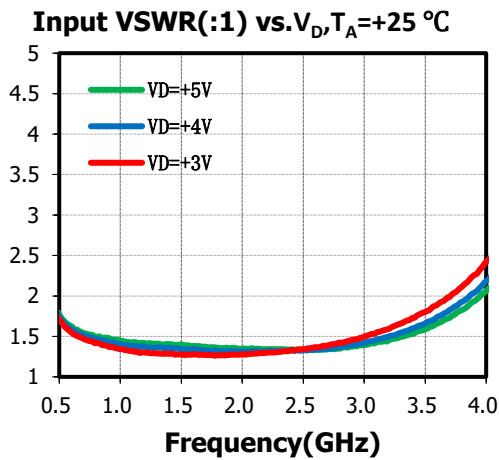

**SuperApex, LLC**







1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
 Tel: 1-847-505-8319, 1-847-573-9866  
 E-mail: sales@superapexco.com  
 Website: www.superapexco.com

# SAC4000Q3



GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0

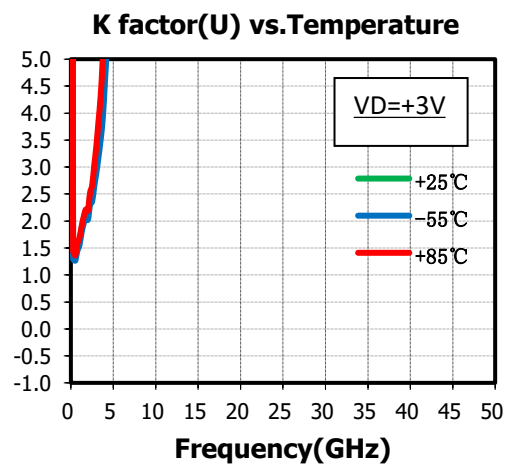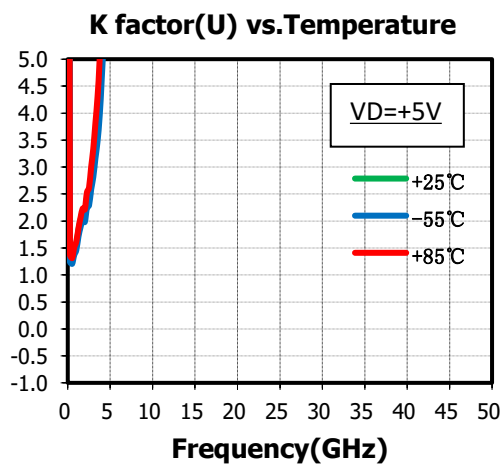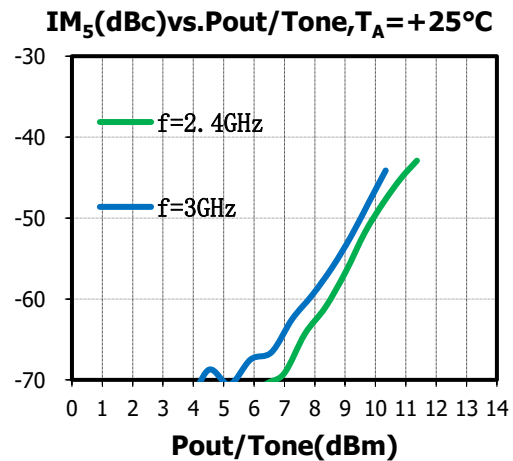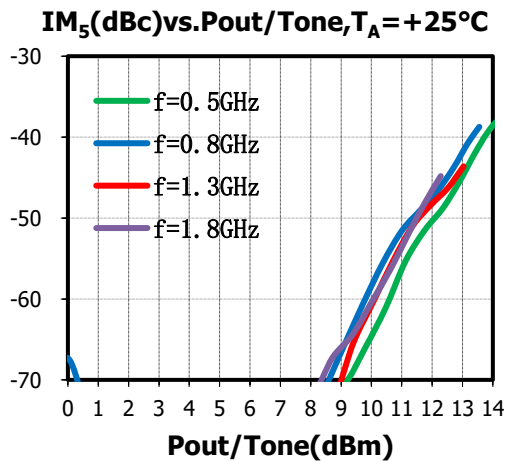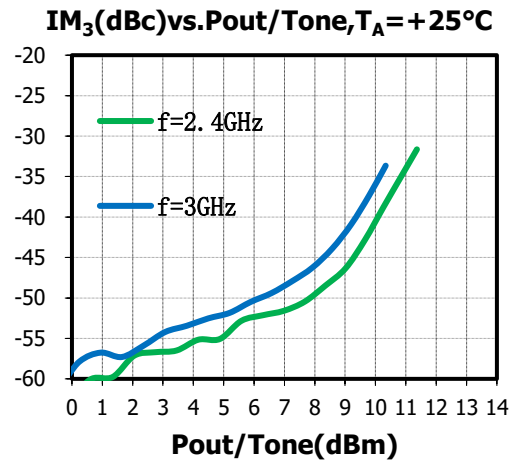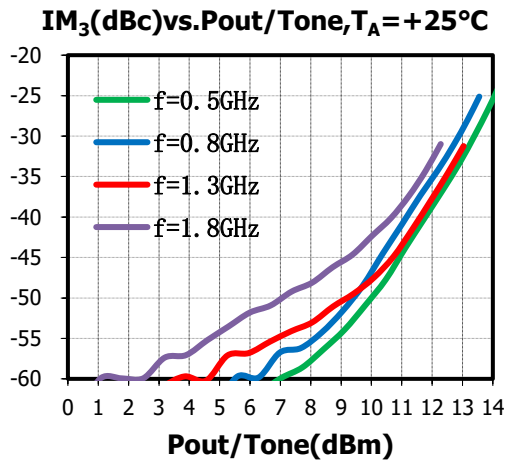


**SuperApex, LLC**

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
 Tel: 1-847-505-8319, 1-847-573-9866  
 E-mail: sales@superapexco.com  
 Website: www.superapexco.com


# SAC4000Q3

GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz


Rev 1.0

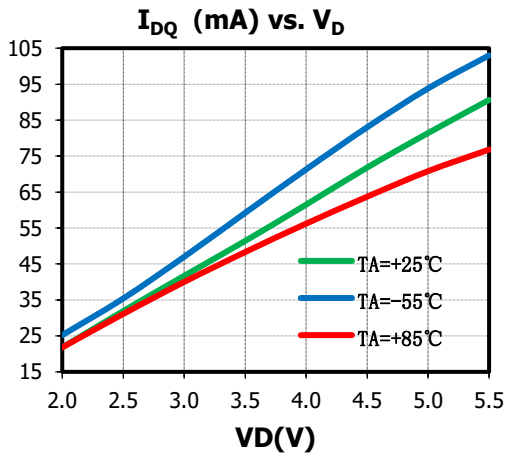

## Outline Drawing (All dimensions in mm)

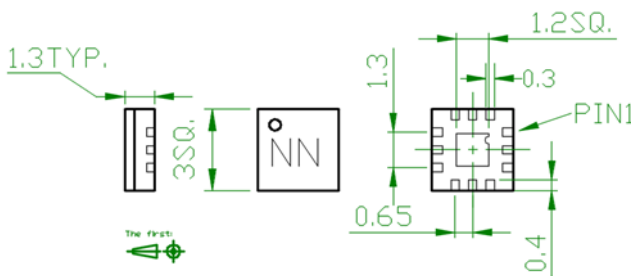

## Application Circuit

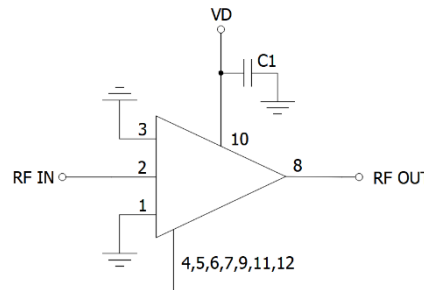

## Pin Function


Pin No.	Description	Pin No.	Description
1	Connect to ground	7	Connect to ground
2	RF input, AC Coupled	8	RF output, AC Coupled
3	Connect to ground	9	Connect to ground
4	Connect to ground	10	VD
5	Connect to ground	11	NC or connect to ground
6	Connect to ground	12	NC or connect to ground

# SAC4000Q3

GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0

## SAC4000Q3 Evaluation Board

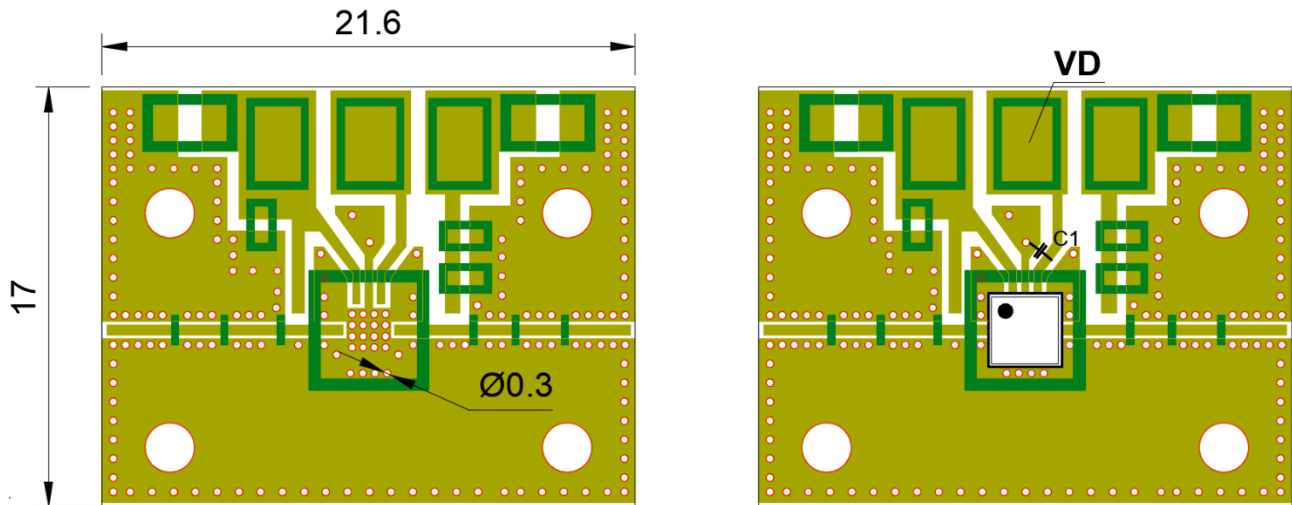


The Evaluation board is a 2-layer board fabricated using Rogers 4350  $t=0.254$  and using best practices for high frequency RF design. The RF input and RF output traces have a  $50\ \Omega$  characteristic impedance.


## Components List

Reference Des.	Value	Part Number	Manuf.
C1	0.01 $\mu$ F	GRM0336R61A103KE	Murata

## Bare Die Outline ( $\mu$ m)

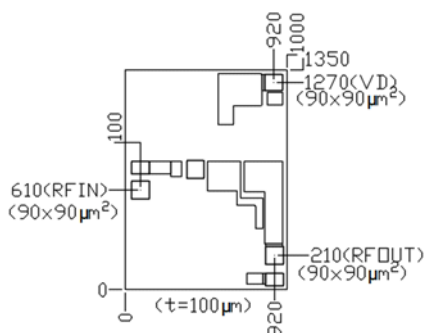

## Assembly Diagram

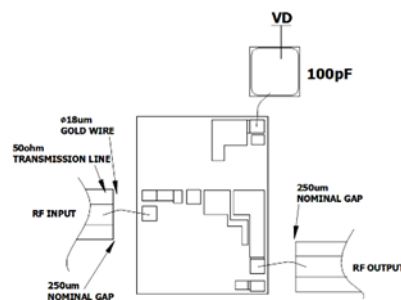

## SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com

# SAC4000Q3



GaAs MMIC Low Noise Amplifier  
0.7~3.5GHz

Rev 1.0

## Attention:

1. The moisture resistant grade of SAC4000Q3 is 2a, the storage environment  $\leq 30^{\circ}$  C/60% RH, the surrounding workshop life is 4 weeks.
2. After un-packing, it is necessary to bake the parts for 6 hours in  $125\pm 5$  degree environment before soldering.
3. GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.
4. The back of bare chip is RF and DC ground.
5. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 1 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized.

## Revision History

Revision	Date	Comment
1.0	Mar 30, 2022	First Release

---

### SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com