

SAC3063QP3



GaAs MMIC Low Noise Amplifier
0.8GHz~1.6GHz NF 0.4dB

Rev 1.4

Features

- Frequency: 0.8GHz ~ 1.6GHz
- Gain: 30dB
- Noise Figure: 0.4dB
- OutputP_{-1dB}:12dBm
- Power Supply: +5V@50mA
- Package Size : QFN3x3 mm

Typical Applications


- Microwave radio
- Telecommunication
- Test instrumentation

General Description

SAC3063QP3 is a GaAs MMIC Low Noise Amplifier in leadless 3x3mm surface mount package, which operates between 0.8GHz ~ 1.6GHz. The amplifier can provide 30dB gain, 12dBm OutputP_{-1dB}, 0.4dB noise figure from a +5V supply voltage.

The amplifier I/O's are internally matched to 50 Ohms.

Functional Diagram

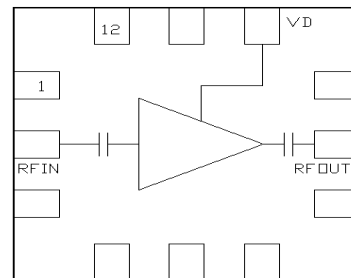

Electrical Performance (T_A=25°C, V_D= +5V, I_D=50mA, Z₀=50Ω)

Parameter	Min	Typ.	Max	Units
Frequency Range	0.8 ~ 1.6			GHz
Gain	25	30	—	dB
Gain Flatness	—	±1.5	—	dB
Reverse Isolation	-35	-45	—	dB
Input/Output Return Loss	-10	-13	—	dB
Noise Figure	—	0.4	0.65	dB
Output Power for 1 dB Compression (OP _{-1dB})	11	12	—	dBm
Output IP ₃ *	—	24	—	dBm
Supply Voltage (V _D)	4.85	5	5.3	V
Supply Current(I _D)	—	50	—	mA

*Pout / Tone = 0dBm, fc= 1GHz, Δf=5MHz

Absolute Maximum Ratings

Maximum Input Power	+12dBm	Operating Temperature	-40°C ~ +70°C
Channel Temperature	150°C	Storage Temperature	-65°C ~ +150°C
Maximum V _D	+5.5V		

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3063QP3









GaAs MMIC Low Noise Amplifier
0.8GHz~1.6GHz NF 0.4dB

Rev 1.4

Typical Performance Curve

The results captured in the test-jig environment within connector plan, then de-embedded the housing an come back in the package plan

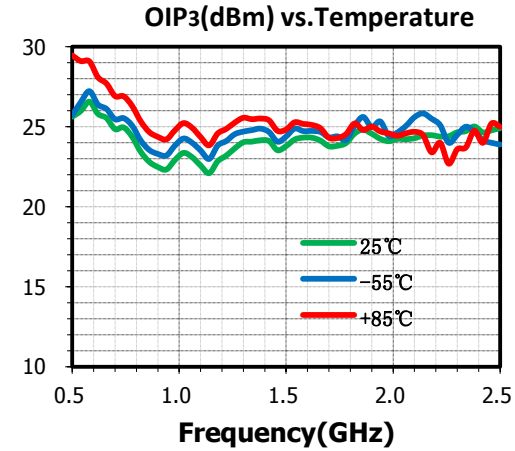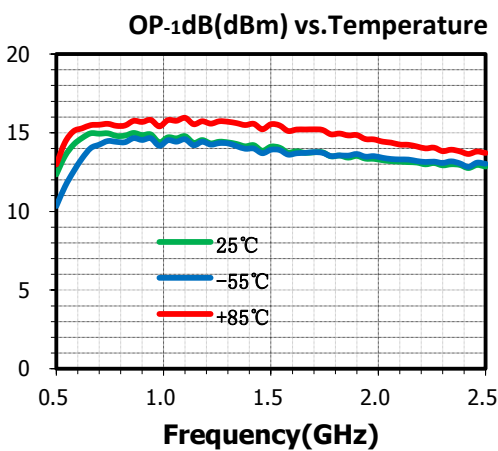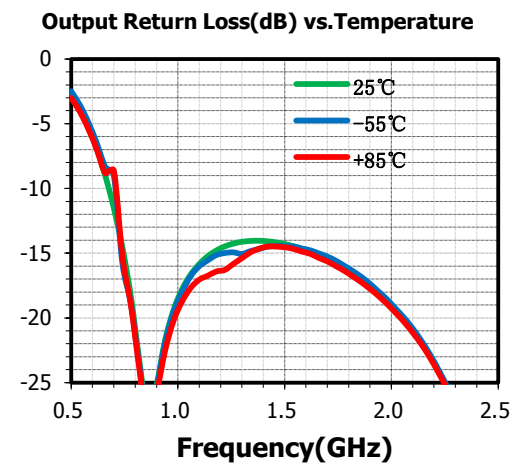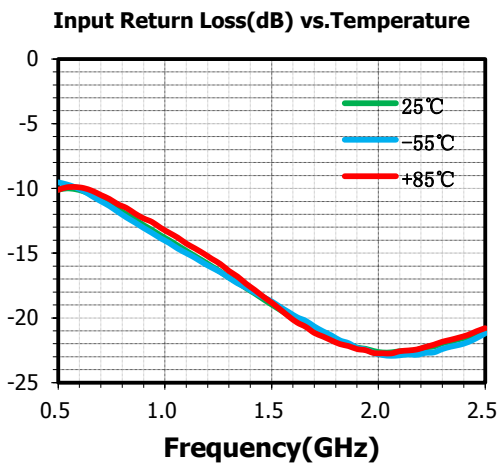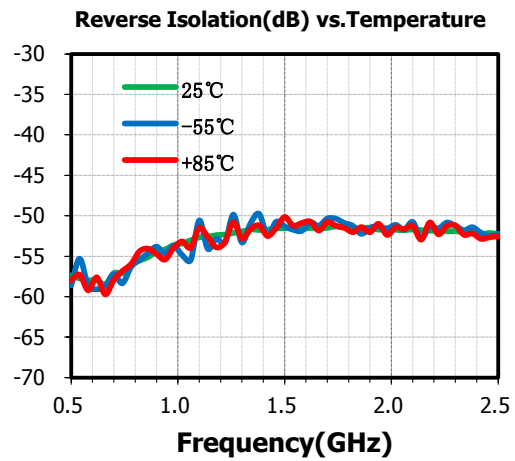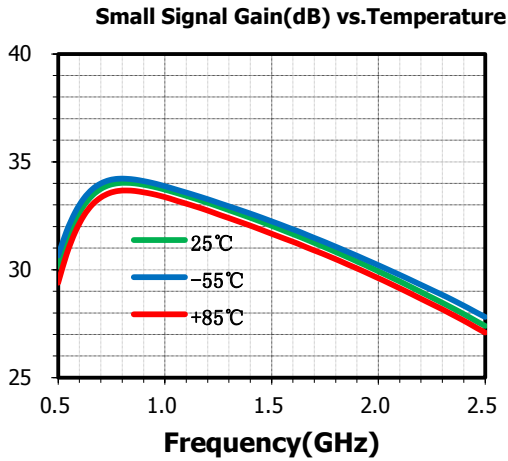


SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3063QP3

GaAs MMIC Low Noise Amplifier
0.8GHz~1.6GHz NF 0.4dB

Rev 1.4

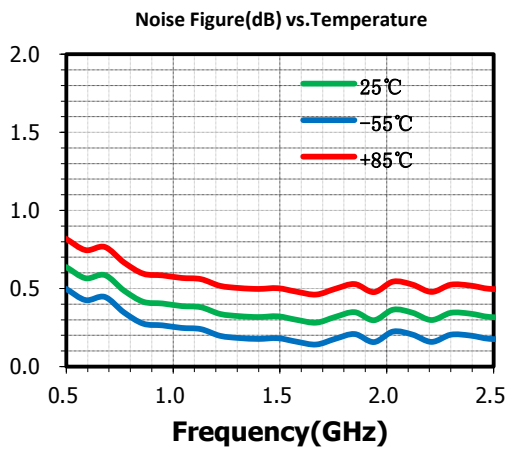

Outline Drawing (All dimensions in mm)

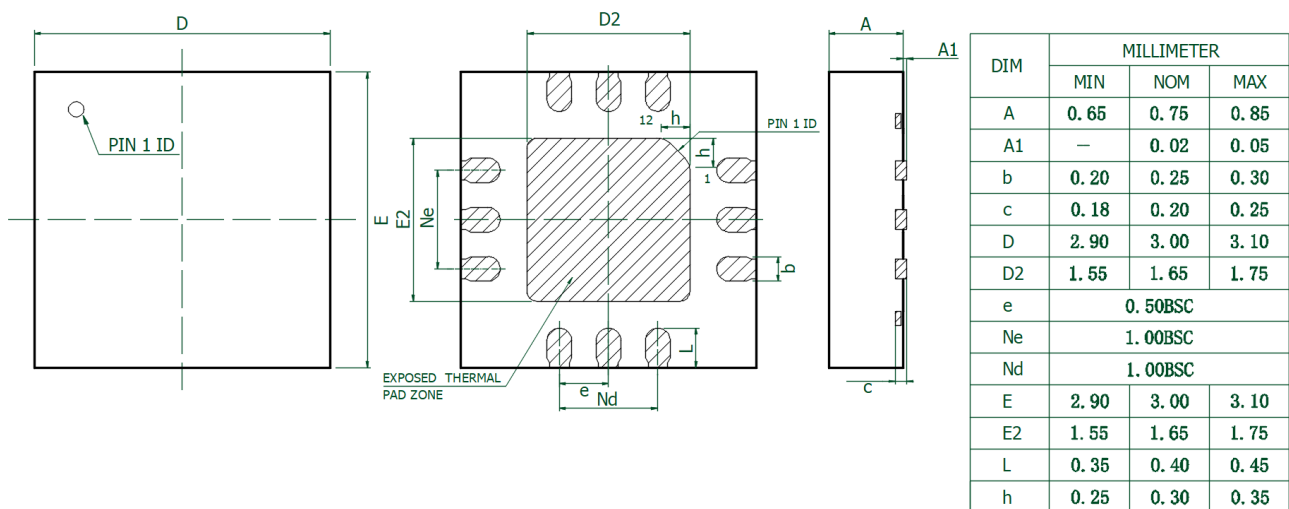

Pin Function


Pin No.	Func.	Pin No.	Func.	Pin No.	Func.
1	Connect to GND	10	VD Supply		
2	RF IN	11	Connect to GND		
3	Connect to GND	12	Connect to GND		
4	Connect to GND				
5	Connect to GND				
6	Connect to GND				
7	Connect to GND				
8	RF OUT				
9	Connect to GND				

SAC3063QP3

GaAs MMIC Low Noise Amplifier
0.8GHz~1.6GHz NF 0.4dB

Rev 1.4

Application Circuit

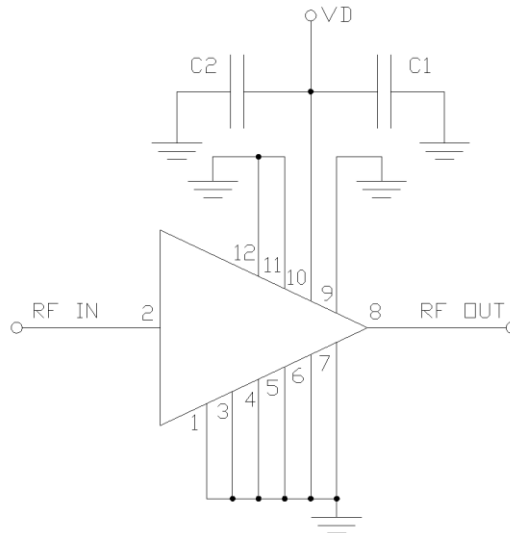

Component list

Reference Des.	Value	Part Number	Manuf.	Size
C1	0.01uF	GRM15R71H103K	MURATA	0402
C2	4700pF	GRM1555C1H472J	MURATA	0402

Attention:

1. The moisture resistant grade of products is 2A, the storage environment $\leq 30^{\circ}$ C/60% RH, The surrounding workshop Life is 4 weeks.
2. After un-packing, It is necessary to bake the parts for 6 hours in 125+/-5 degree environment before soldering.

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com