

SAC1232

Wide-Band Low Noise Amplifier Module 18~26GHz

Rev1.0

Features

- Frequency: 18~26 GHz
- Gain: 35dB
- Noise Figure: 2.5dB Max
- Supply Voltage: +12V~+15V
- Supply Current: 180mA

Typical Applications

- Radar and ECM
- RF/ Microwave Radio
- Military and Space
- Test and Measurement
- Fiber Optics

General Description


SAC1232 is a low noise amplifier manufactured using microwave hybrid integration technology. The operating frequency from 18 to 26 GHz with 35 dB of gain and 10dBm Output P_{-1dB}.

Electrical Performance

Parameter	Min.	Typ.	Max.	Units
Frequency Range	18~26			GHz
Gain	30	—	35	dB
Input VSWR	—	—	2	:1
Output VSWR	—	—	2	:1
Noise Figure	—	—	2.5	dB
Output Power for 1 dB Compression (OP _{-1dB})	10	—	—	dBm
Supply Voltage	12	—	15	V
Supply Current (I _b)	—	180	—	mA

Mechanical Outline

All dimensions are in millimeters

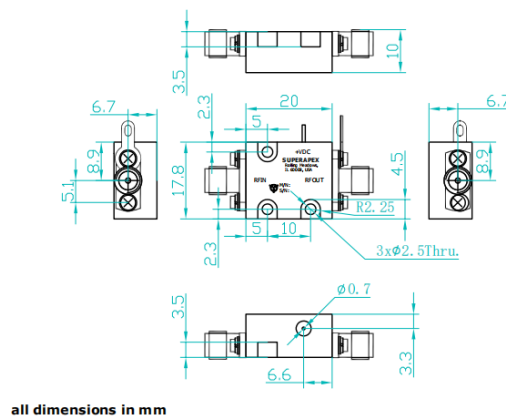

SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com