

# SAC1340

## Wide-band Amplifier Module 6~20GHz

Rev1.0

### Features

- Frequency: 6~20 GHz
- Gain: 20dB
- Noise Figure: 3 dB Typ.
- Supply Voltage: +14V~+17V
- Supply Current: 450 mA

### Typical Applications

- Radar and ECM
- RF/ Microwave Radio
- Military and Space
- Test and Measurement
- Fiber Optics

### General Description


SAC1340 is a Wide-band amplifier manufactured using microwave hybrid integration technology. The operating frequency from 6 to 20 GHz with 20 dB of gain and 28 dBm Output P<sub>-1dB</sub>.

### Electrical Performance

Parameter	Min.	Typ.	Max.	Units
Frequency Range	6~20			GHz
Gain	20	—	—	dB
Gain Flatness	—	±2.0	—	dB
Input VSWR	—	1.7	2.0	:1
Output VSWR	—	1.7	2.0	:1
Noise Figure	—	3	5	dB
Output Power for 1 dB Compression (OP <sub>-1dB</sub> )	28	—	—	dBm
Supply Voltage	14	—	17	V
Supply Current (I <sub>b</sub> )	—	450	650	mA

### Mechanical Outline

All dimensions are in millimeters

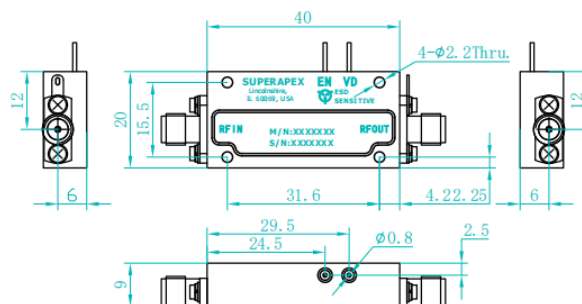

all dimensions in mm

### SuperApex Corporation

Address: 1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com