


## Features

- Frequency: 4~15GHz
- Insertion Loss: 0.8dB@10GHz
- Isolation: 40dB@10GHz
- Reflective switch

## Description

SAC3232 is a wideband reflective SP2T switch, The device is fully passivated and has a layer of PBO for scratch protection. Each RF port contains DC blocking capacitors and a DC bias circuit consisting of high impedance lines and decoupling capacitor.

## Functional Diagram

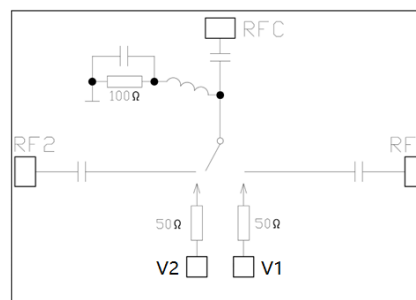

## Electrical Performance

$T_{BASE}=25^{\circ}C, Z_0=50\Omega, +15mA/-5V, CW$

Parameter	Min.	Typ.	Max.	Units
Frequency	4	—	15	GHz
Insertion Loss	—	1	1.5	dB
RFC Return Loss	—	13	—	dB
RF <sub>x</sub> Return Loss	—	12	—	dB
Isolation	30	40	—	dB
Forward Bias Current	10	15	35	mA
Switching Speed	—	25	—	nS
Forward Bias Voltage	—	1	—	V

## Absolute Maximum Ratings


Input Power	+31dBm (-V: -15V)	Operating Temperature ( $T_{BASE}$ )	-55°C~+85°C
Junction Temperature	150°C	Storage Temperature	-55°C~+150°C
Forward Bias Current	40mA	Reverse Bias Voltage (-V)	-30V

## Typical Performance Curve


The following curves are taken from SAC3232 evaluation board. De-embedding operation has been Implemented.

+15mA/-5V, CW,  $T_{BASE}=+25^{\circ}C$


Insertion Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

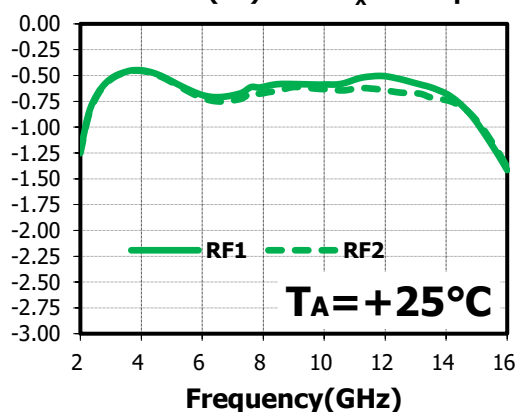


Insertion Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

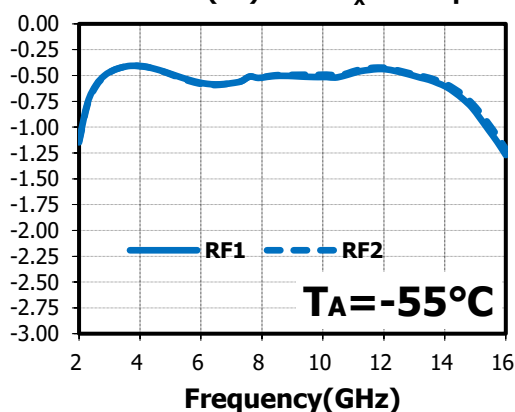


Insertion Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

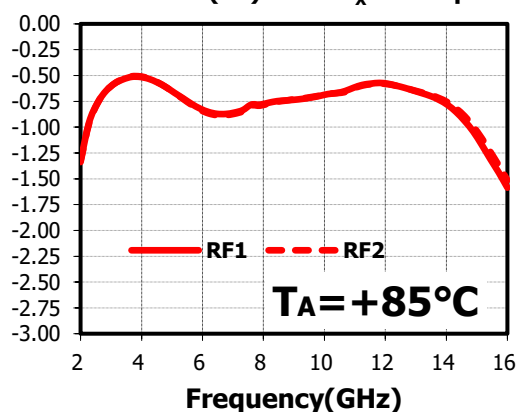


Return Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

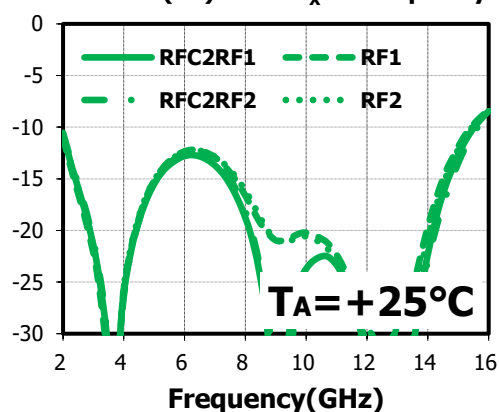


Isolation(dB) RF1 ON vs.Frequency

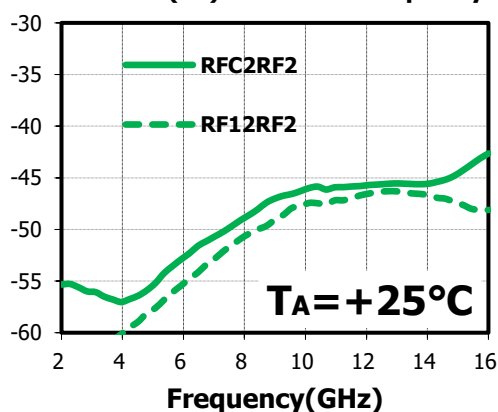


Return Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

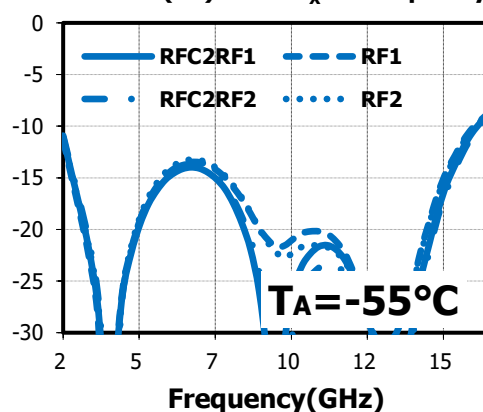

Return Loss(dB)RFC2RF<sub>x</sub> vs.Frequency

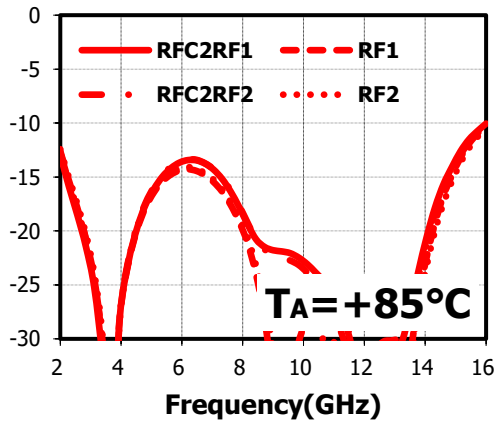


Isolation(dB) RF2 ON vs.Frequency

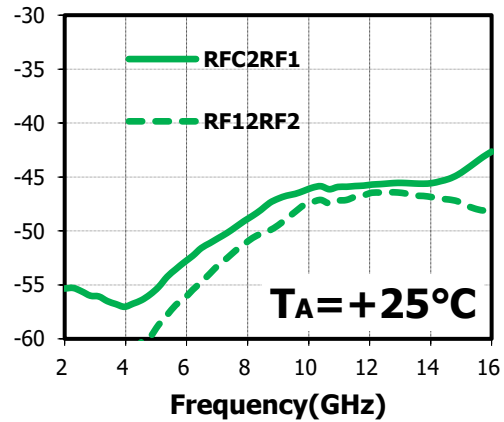

## Die Outline Drawing

(All dimensions in  $\mu\text{m}$ )

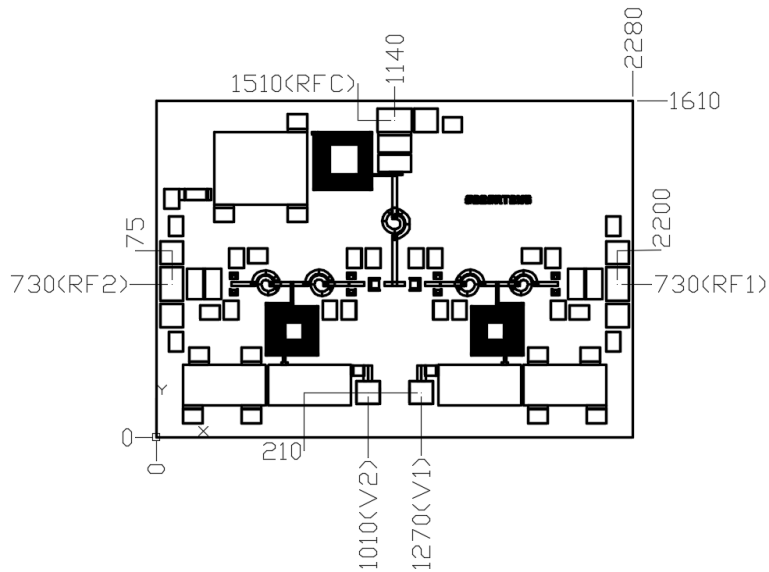

## Truth Table

Inputs		RF Path	
V1	V2	RFC-RF1	RFC-RF2
-V	+V	ON	OFF
+V	-V	OFF	ON

1. -V is reverse bias voltage, A -5V voltage can be used to reverse bias the PIN diode of the chip, for high power applications, a higher negative voltage can be used,

2. +V is forward bias voltage, A voltage of 3~5 V can be used to forward bias the PIN diode, forward bias current is set using external bias resistors placed at pads V1 and V2.

# SAC3232



GaAs MMIC PIN Switch  
4GHz~15GHz SP2T

Rev 1.0

## Attention:

1. The back of bare chip is RF and DC ground.
2. The RFC and RFx ports are AC coupled, the withstand voltage is 30V.

## Revision History

Revision	Date	Comment
1.0	2024-05-31	First Release

---

### SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA  
Tel: 1-847-505-8319, 1-847-573-9866  
E-mail: sales@superapexco.com  
Website: www.superapexco.com