

SAC3232Q4

GaAs MMIC PIN Switch
2GHz~18GHz SP2T

Rev 1.0


Features

- Frequency: 2~18GHz
- Insertion Loss: 1.1dB@18GHz
- Isolation: 45dB@18GHz
- Reflective switch
- Packaged: QFN4x4

Description

SAC3232Q4 is a wideband reflective SP2T switch housed in a QFN surface mount package, Each RF port contains DC blocking capacitors and a DC bias circuit consisting of high impedance lines and decoupling capacitor.

Functional Diagram

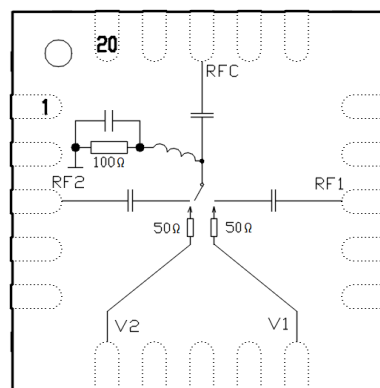

Electrical Performance

$T_{BASE}=25^{\circ}C$, $Z_0=50\Omega$, +22mA/-5V, CW

| Parameter | Min. | Typ. | Max. | Units |
|----------------------|------|------|------|-------|
| Frequency | 2 | — | 18 | GHz |
| Insertion Loss | — | 1 | 1.5 | dB |
| $VSWR_{RFC}$ | — | 1.3 | 2 | : 1 |
| $VSWR_{RFX}$ | — | 1.3 | 2 | : 1 |
| Isolation | 40 | 45 | — | dB |
| Forward Bias Current | — | 22 | 35 | mA |
| Switching Speed | — | 25 | — | nS |
| Forward Bias Voltage | — | 1 | — | V |

Absolute Maximum Ratings

| | | | |
|----------------------|----------------------|-----------------------------------------|--------------|
| Input Power | +31dBm (-V: -15V) | Operating Temperature (T_{BASE}) | -55°C~+85°C |
| Junction Temperature | 150°C | Storage Temperature | -55°C~+150°C |
| Forward Bias Current | 40mA | Reverse Bias Voltage (-V) | -30V |

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3232Q4









GaAs MMIC PIN Switch
2GHz~18GHz SP2T

Rev 1.0

Typical Performance Curve

The following curves are taken from SAC3232Q4 evaluation board. De-embedding operation has been implemented.

+22mA/-5V, CW, $T_{BASE}=+25^{\circ}\text{C}$

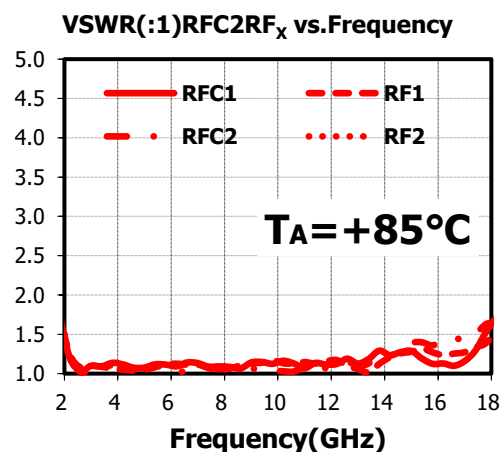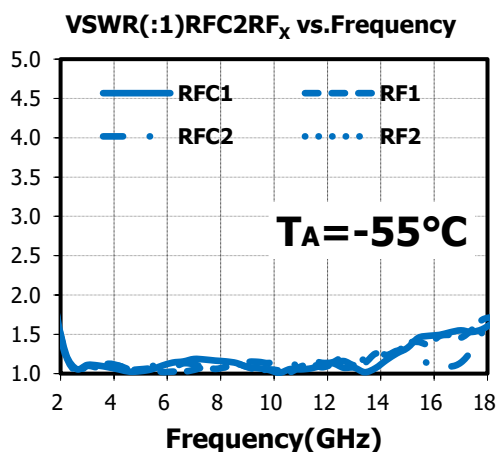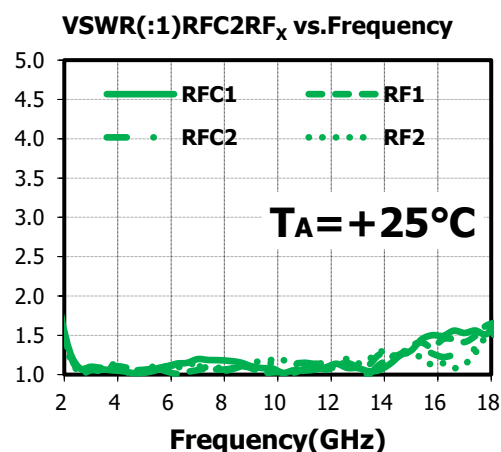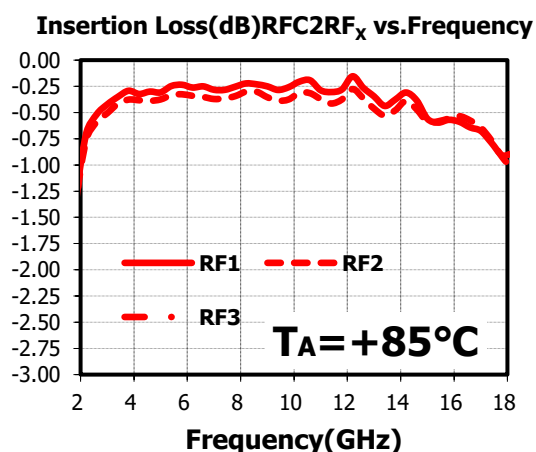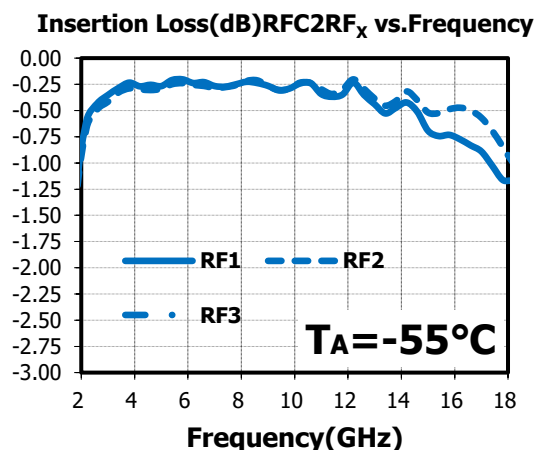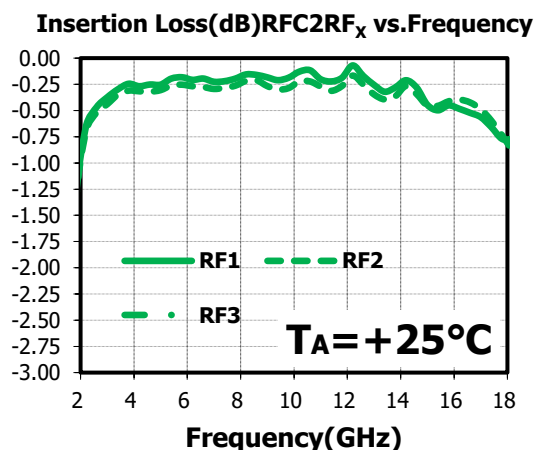



SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3232Q4


GaAs MMIC PIN Switch
2GHz~18GHz SP2T

Rev 1.0

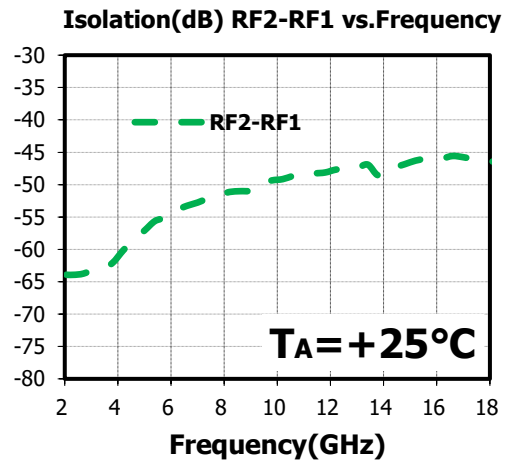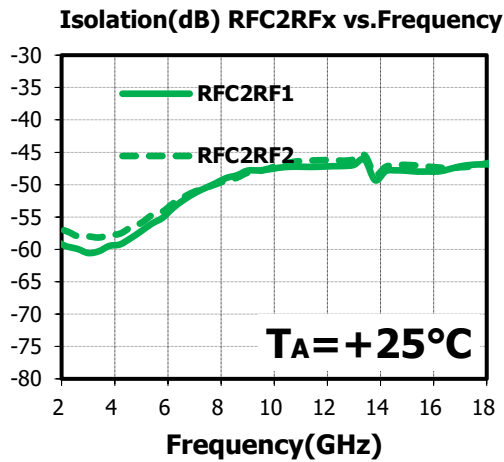

Outline Drawing

(All dimensions in mm)

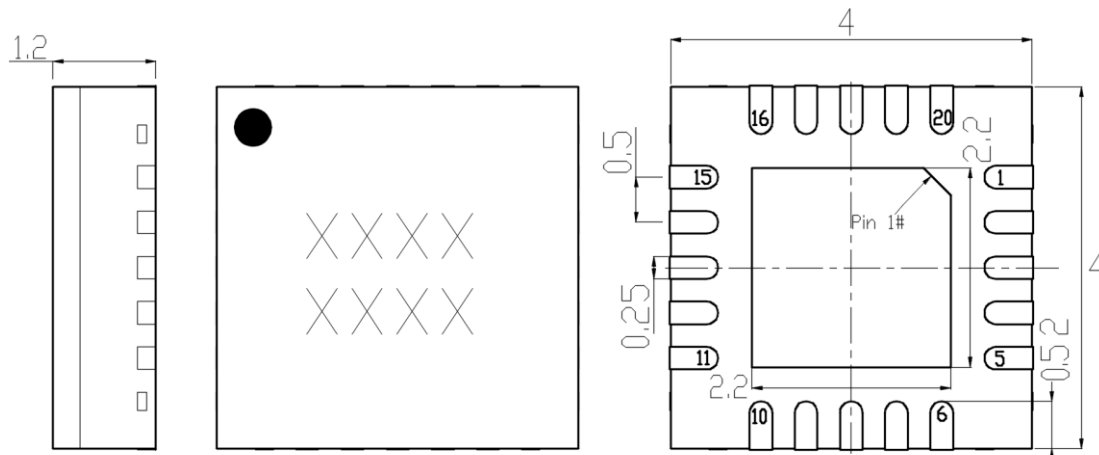

Truth Table

| Inputs | | RF Path | |
|--------|----|---------|---------|
| V1 | V2 | RFC-RF1 | RFC-RF2 |
| -V | +V | ON | OFF |
| +V | -V | OFF | ON |


1. -V is reverse bias voltage, A -5V voltage can be used to reverse bias the PIN diode of the chip, for high power applications, a higher negative voltage can be used,

2. +V is forward bias voltage, A voltage of 3~5 V can be used to forward bias the PIN diode, forward bias current is set using external bias resistors placed at pads V1 and V2.

Pin Function

| Pin No. | Description | Pin No. | Description |
|---------|----------------|---------|----------------|
| 1 | Connect to GND | 11 | Connect to GND |
| 2 | Connect to GND | 12 | Connect to GND |
| 3 | RF2 | 13 | RF1 |
| 4 | Connect to GND | 14 | Connect to GND |
| 5 | Connect to GND | 15 | Connect to GND |
| 6 | V2 | 16 | Connect to GND |
| 7 | Connect to GND | 17 | Connect to GND |
| 8 | Connect to GND | 18 | RFC |
| 9 | Connect to GND | 19 | Connect to GND |
| 10 | V1 | 20 | Connect to GND |

Evaluation Board

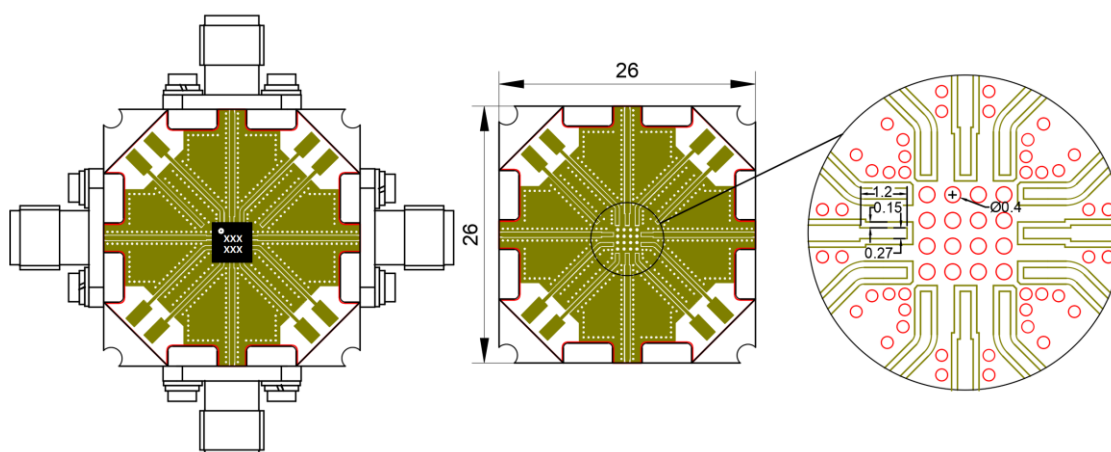

The Evaluation board is a 2-layer board fabricated using Rogers 4350b $t=0.254$ and using best practices for high frequency RF design. The RF input and RF output traces have a $50\ \Omega$ characteristic impedance.

Attention:

1. The RF input and output ports have integrated DC blocking capacitors with a voltage resistance of 30V;
2. The ESD tolerance level is HBM Class 1A;
3. The moisture resistance level of the packaged product is 2a, the storage environment is less than or equal to $30\ ^\circ\text{C}/60\% \text{RH}$, and the lifespan of the surrounding workshop;
4. When using packaged products, try to use thin RF boards and increase the number of groundings vias at the bottom of the device to reduce grounding inductance;
5. Remove the vacuum packaging and bake in a $125\pm 5\ ^\circ\text{C}$ environment for 6 hours before soldering.

Revision History

| Revision | Date | Comment |
|----------|---------------|---------------|
| 1.0 | July 19, 2024 | First Release |