

SAC3086QP3



GaAs MMIC Low Noise Amplifier
10~13GHz

Rev 1.1

Features

- Frequency: 10~13GHz
- Gain: 18dB
- Noise Figure: 1.1dB Typ. 1.5dB Max
- Output P_{-1dB}: 5dBm
- Power Supply: +3~4V, 8~11mA
- Package Size: 3mm×3mm×0.75mm

Typical Applications

- Point-to-Point Radios
- Phased Arrays

General Description

SAC3086QP3 is a GaAs MMIC Low Noise Amplifier in QFN surface mount package, which operates between in 10~13GHz.

The amplifier can provide 18dB of gain, 5dBm of output P_{-1dB} and 1.1dB noise figure and from a 8mA supply current.

Picture



Electrical Performance 1

T_A=25°C, V_D=+3V, I_D=8mA, Z₀=50Ω

Parameter	Min.	Typ.	Max.	Units
Frequency Range		10~13		GHz
Gain	16	18	22	dB
Gain Flatness	—	±1	±1.5	dB
Input / Output port return loss	-8	-12	—	dB
Noise Figure	—	1.1	1.5	dB
Reverse Isolation	—	-35	—	dB
Output P _{-1dB}	-2	1	—	dBm
Output IP ₃	—	12	—	dBm
Supply Current (I _D)	—	8	13	mA

Electrical Performance 2

T_A=25°C, V_D=+4V, I_D=11mA, Z₀=50Ω

Parameter	Min.	Typ.	Max.	Units
Frequency Range		10~13		GHz
Gain	16	19	23	dB
Gain Flatness	—	±1	±1.5	dB
Input / Output port return loss	-8	-12	—	dB
Noise Figure	—	1.1	1.5	dB
Reverse Isolation	—	-35	—	dB
Output P _{-1dB}	3	5	—	dBm
Output IP ₃	—	17	—	dBm
Supply Current (I _D)	—	11	18	mA

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3086QP3



GaAs MMIC Low Noise Amplifier
10~13GHz

Rev 1.1

Absolute Maximum Ratings


Maximum Input Power	+20dBm, CW 30s	Operating Temperature	-55°C~+85°C
Channel Temperature	+150°C	Storage Temperature	-55°C~+150°C
Supply Voltage	+6V		

Typical Performance Curve


$V_D=+3V, I_{DQ}=8mA,$

The following curves are taken from SAC3086QP3 evaluation board. De-embedding operation has been Implemented.


Small Signal Gain(dB) vs.Temperature

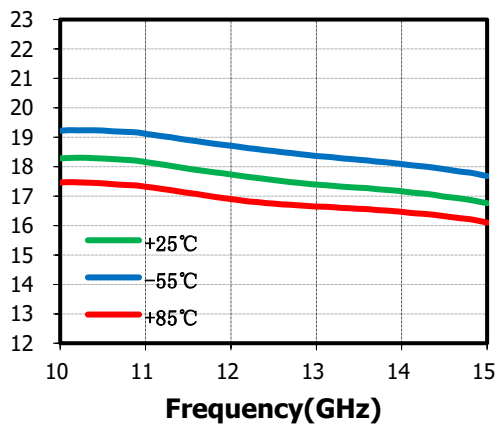


Reverse Isolation(dB) vs.Temperature

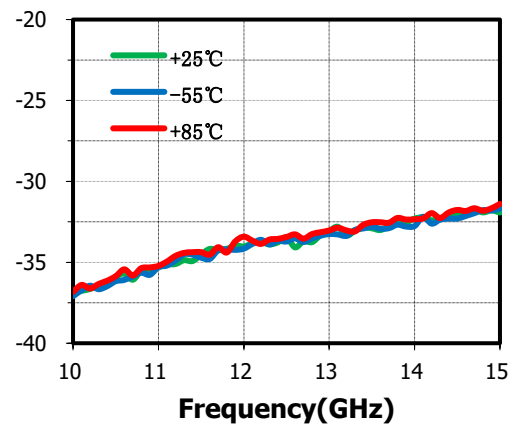

Input RL(dB) vs.Temperature

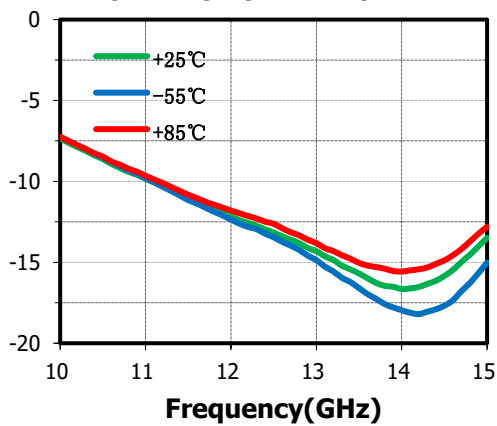

Output RL(dB) vs.Temperature

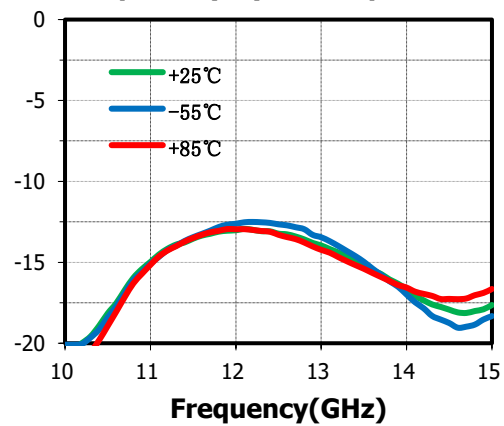

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com


SAC3086QP3




GaAs MMIC Low Noise Amplifier
10~13GHz

Rev 1.1


Output P-1dB(dBm) vs.Temperature

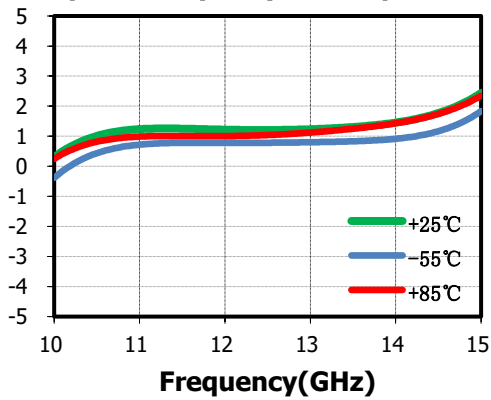


Output IP₃(dBm) vs.Temperature

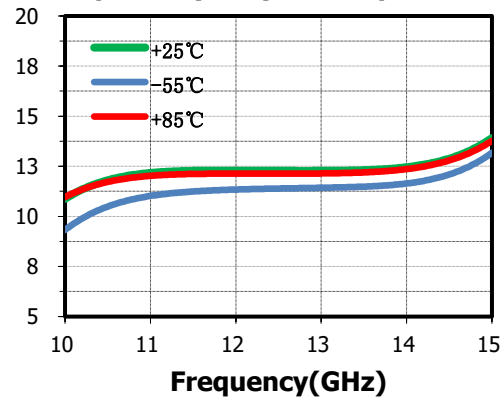

Noise Figure(dB) vs.Temperature

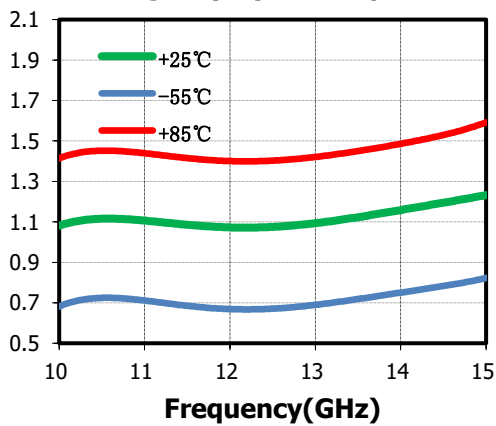


IM₃(dBc) vs.Temperature, f=12GHz

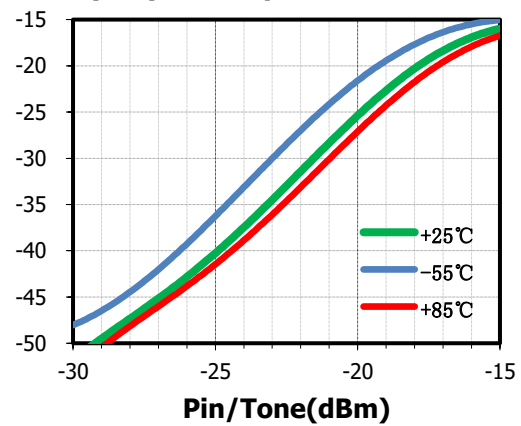


$V_D=+4V, I_{DQ}=11mA,$

The following curves are taken from SAC3086QP3 evaluation board. De-embedding operation has been Implemented.

Small Signal Gain(dB) vs.Temperature

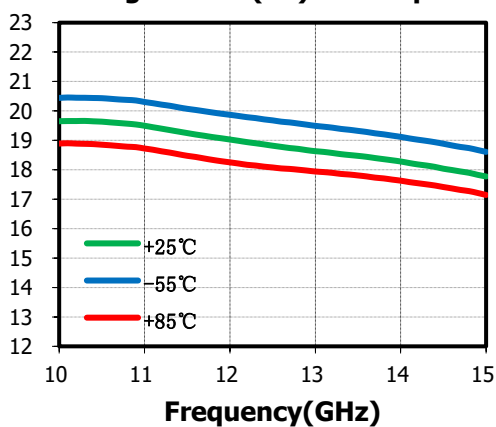

Reverse Isolation(dB) vs.Temperature

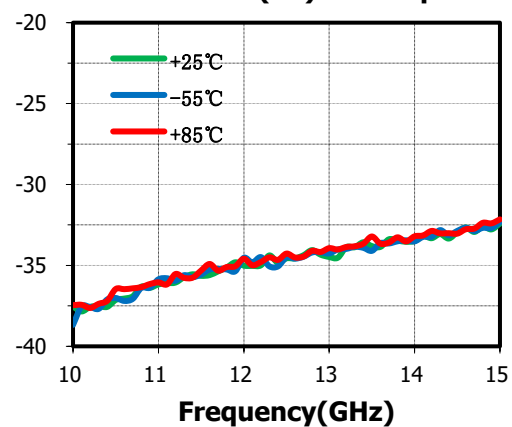

SuperApex, LLC







1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3086QP3



GaAs MMIC Low Noise Amplifier
10~13GHz

Rev 1.1

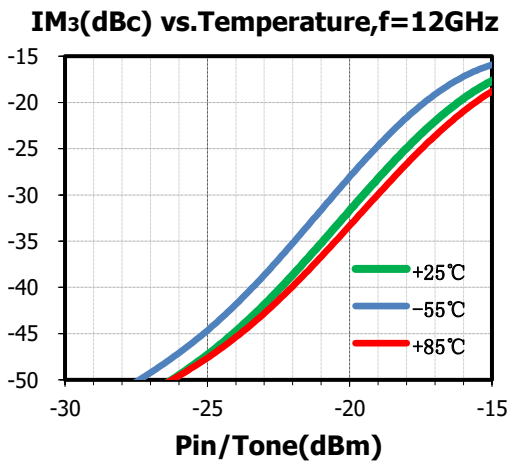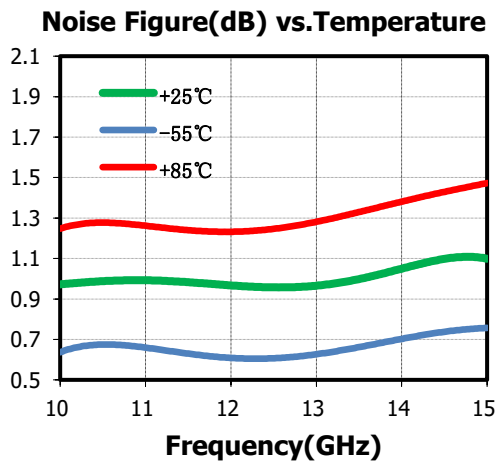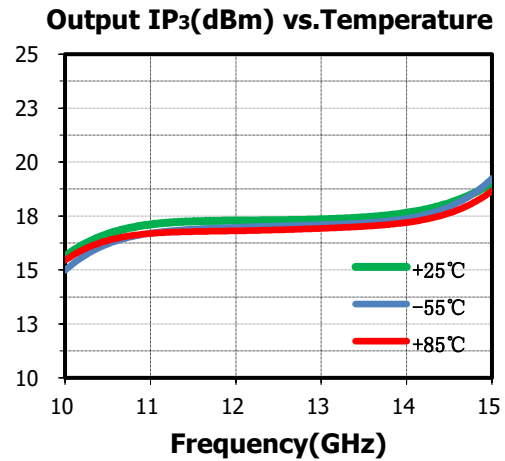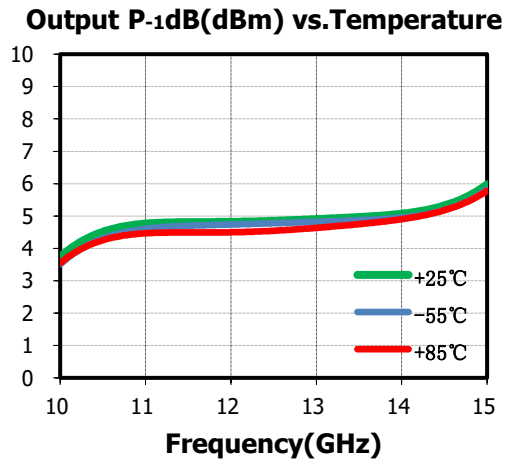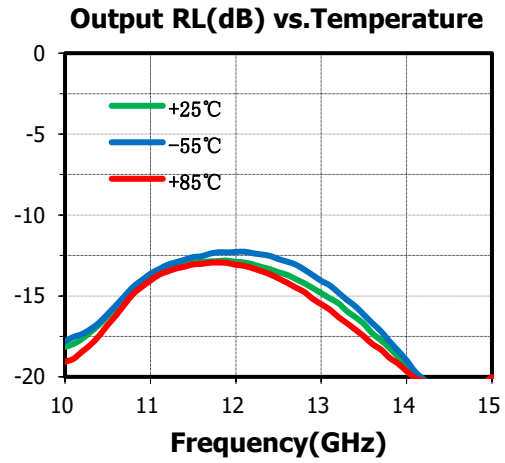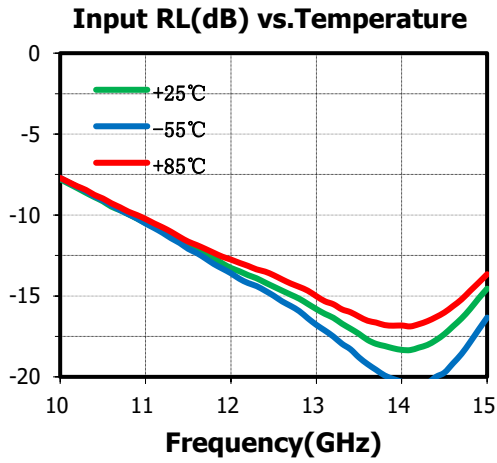

SAC3086QP3




GaAs MMIC Low Noise Amplifier
10~13GHz


Rev 1.1

Outline Drawing

(All dimensions in mm)

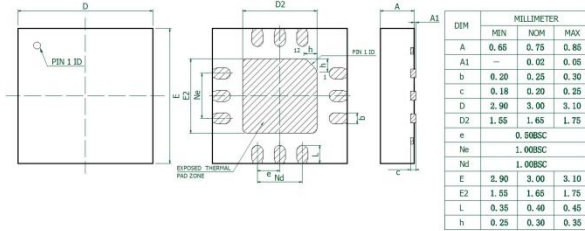


Application Circuit

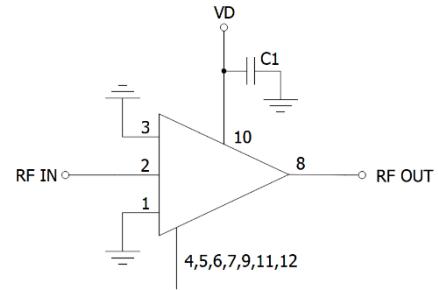

Pin Function

Pin No.	Description	Pin No.	Description
1	Connect to ground	7	Connect to ground
2	RF input, AC Coupled	8	RF output, AC Coupled
3	Connect to ground	9	Connect to ground
4	Connect to ground	10	Drain (VD)
5	Connect to ground	11	NC or connect to ground
6	Connect to ground	12	NC or connect to ground

SAC3086QP3 Evaluation Board

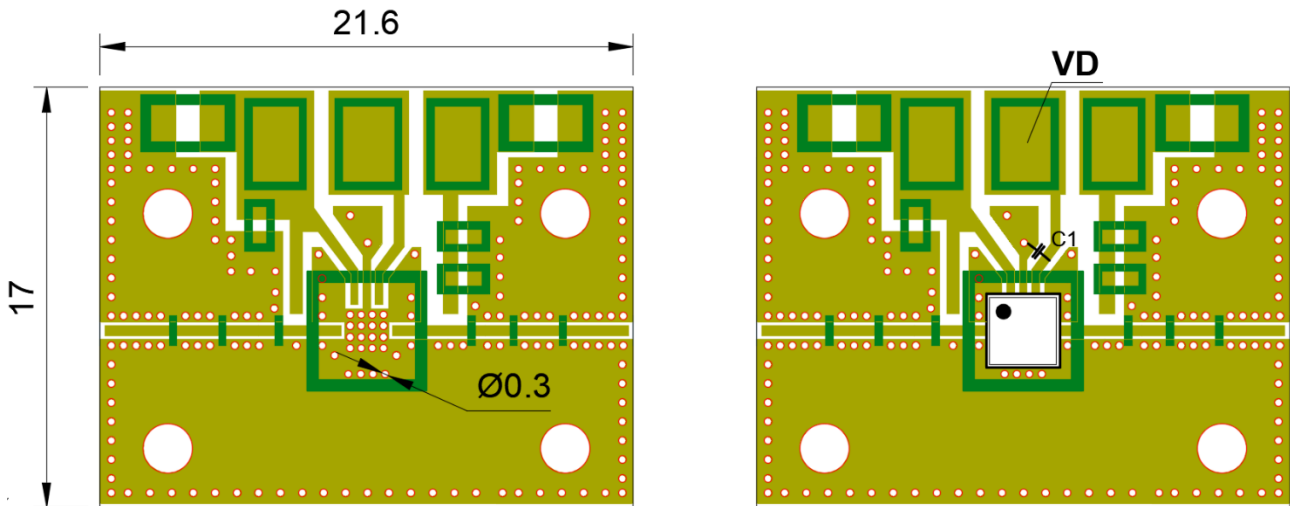

The Evaluation board is a 2-layer board fabricated using Rogers 4350 $t=0.254$ and using best practices for high frequency RF design. The RF input and RF output traces have a 50Ω characteristic impedance.

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com

SAC3086QP3



GaAs MMIC Low Noise Amplifier
10~13GHz

Rev 1.1

Components List

Reference Des.	Value	Part Number	Manuf.
C1	1 μ F	GRM0336R61A105KE	Murata

Attention:

1. The moisture resistant grade of products is 2a, the storage environment $\leq 30^{\circ}\text{C}/60\% \text{RH}$, the surrounding workshop life is 4 weeks.
2. After un-packing, it is necessary to bake the parts for 6 hours in $125\pm 5^{\circ}$ degree environment before soldering.

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com