

Features

- Frequency: 23~43GHz
- Gain: 20dB
- Output P_{-1dB}: 8dBm@28GHz
- Supply Voltage: +5V@33mA
- Die Size: 1.1mmx1.7mmx0.1mm

Typical Applications


- Microwave radio including point to point communication
- Telecommunication
- Test instrumentation
- SatCom

General Description

SAC4018 is a GaAs MMIC Low Noise Amplifier die which operates between 23GHz~43GHz. The amplifier can provide 22dB gain, 8dBm Output P_{-1dB}, 1.8dB noise figure from a 33mA supply current.

The chip offers full passivation for increased reliability and moisture protection. This amplifier is the perfect alternative to higher cost hybrid amplifiers.

Functional Diagram

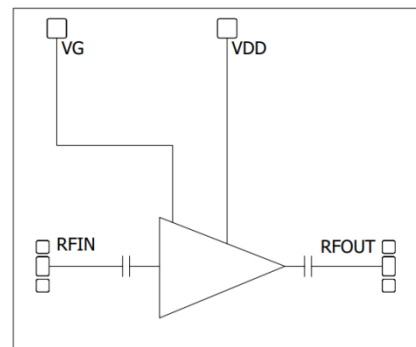

Electrical Performance







T_A=25°C, V_D=+5V, I_D=33mA, Z₀=50Ω

Parameter	Min.	Typ.	Max.	Units
Frequency Range	23~43			GHz
Gain	19	20	24	dB
Gain Flatness	—	±1	±2	dB
Reverse Isolation	—	50	—	dB
Input VSWR	—	1.8	2.0	:1
Output VSWR	—	1.5	2.5	:1
Noise Figure	—	1.8	—	dB
Output Power for 1 dB Compression (OP _{-1dB})	6	8	—	dBm
Supply Current (I _D)	—	33	—	mA

Absolute Maximum Ratings

Maximum Input Power	+15dBm	Operating Temperature	-55°C~+85°C
Channel Temperature	+150°C	Storage Temperature	-65°C~+150°C


Typical Performance Curve

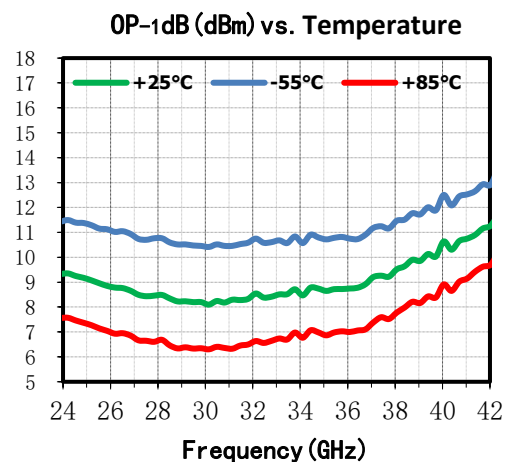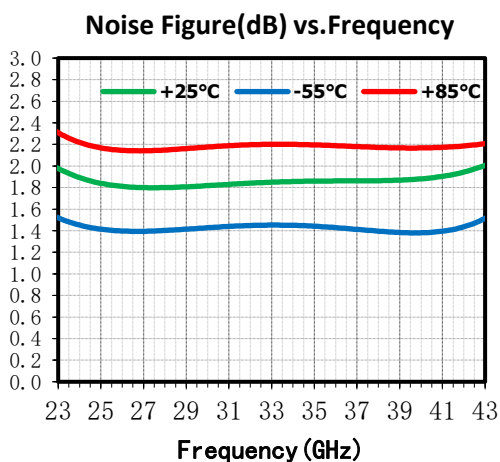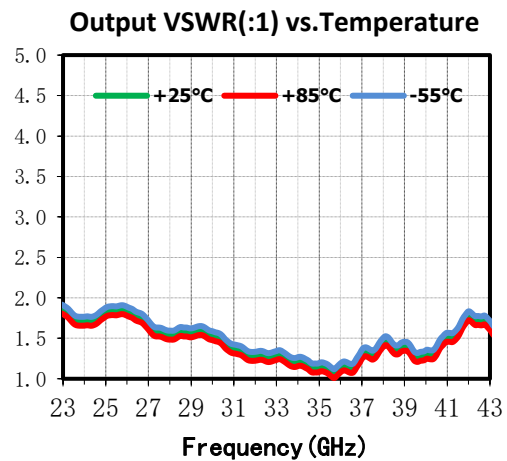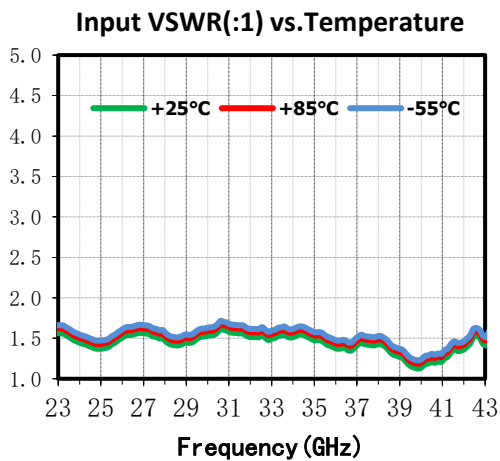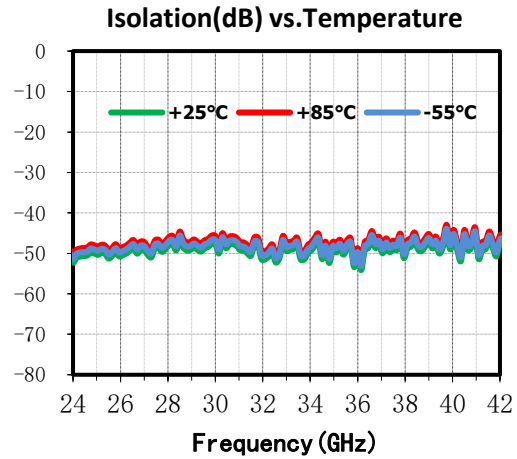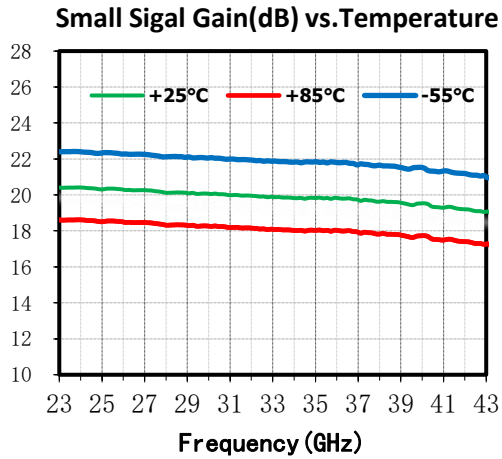

SAC4018


GaAs MMIC Low Noise Amplifier
23~43GHz

Rev 1.0

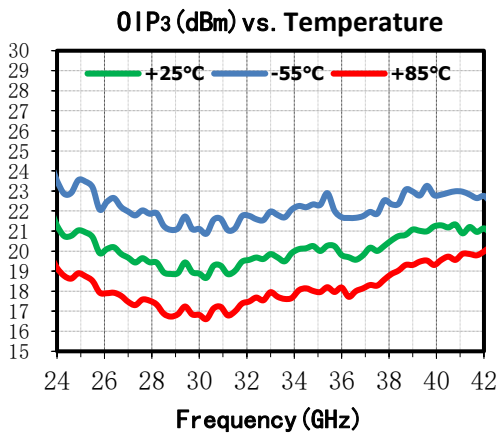


Die Outline

All dimensions in μm

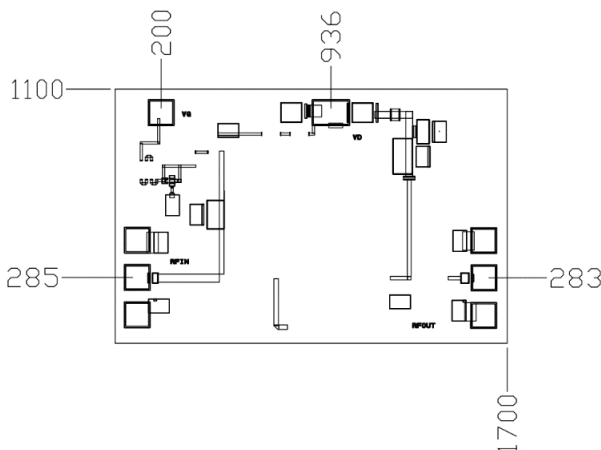

Assembly Diagram

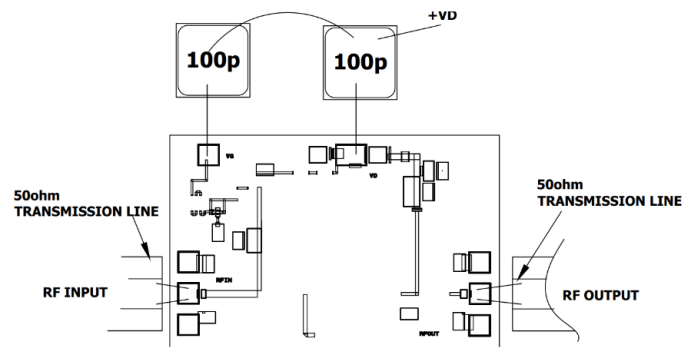

Attention:

1. The back of chip is RF ground.
2. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 0.8mil the rmosonic wedge bonding is highly recommended as the loop height will be minimized.
3. Bypass SLCs should be placed as close as possible to the chip.
4. GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.
5. The RF input and RF output ports withstand voltage is 12V,
6. The ESD Sensitivity (HBM) of SAC4018 is Class 0.

Revision History

Revision	Date	Comment
1.0	JAN 28, 2024	First Release

SuperApex, LLC

1580 S. Milwaukee Ave. Suite 405, Libertyville, IL 60048, USA
Tel: 1-847-505-8319, 1-847-573-9866
E-mail: sales@superapexco.com
Website: www.superapexco.com