


Electrical Performance

Parameter	Symbol	Conditions	Value			Units
			MIN	TYP	MAX	
Frequency Range	F	$Z_0=50\Omega$ $T_A=+25^\circ\text{C}$	0.5	—	6	GHz
Delta Gain	Gpp		—	2	—	dB
Input VSWR	VSWR		—	1.2:1	1.4:1	:1
Output VSWR	VSWR		—	1.2:1	1.4:1	:1
Group Delay	Td		—	10	—	pS/GHz


Absolute Maximum Ratings

Maximum RF Input	+20dBm	Operating Temperature	-55°C~+85°C
		Storage Temperature	-65°C~+150°C

Typical Performance Curve

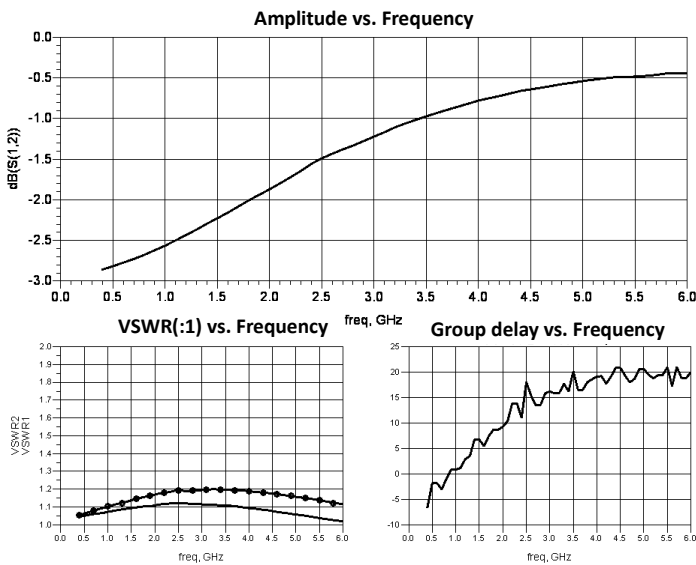

Die Outline

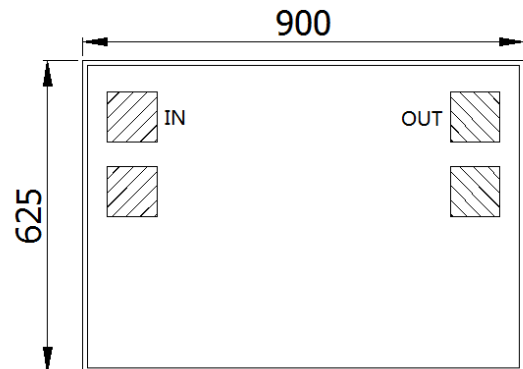

- 1、 All Units are in μm
- 2、 Bonding Pads Size: $100*100\mu\text{m}$
- 3、 Chip Thickness: $100\mu\text{m}$